

CARTRIDGE VALVES / IN-LINE VALVES

Technical Catalogue
July
2015

web edition





The company

Brevini Fluid Power was established in 2003 in Reggio Emilia where it has its head office.

Brevini Fluid Power manufactures hydraulic components and application packages: a very large range suited to several operational requirements and applications thanks to a strict interaction between mechanical, hydraulic and electronic components.

Brevini Fluid Power is among the top manufacturers in Italy and a major player in Europe and in the world.

International presence

Brevini Fluid Power operates internationally with 15 branches all over the world placed in major industrialized countries: Italy, France, Germany, English, Romania, Holland, Finland, China, India, Singapore and the United States. The network is constantly expanding by opening new branches in just a few years.

The branches are guided by managers that have an excellent knowledge of their own country.

The advantages this brings are evident:

- Reduced delivery times thanks to the branches warehouses;
- Easy customization of products and systems basing on the customer's needs, thanks to the competence and professional skills of the branches' own technical and servicing departments;
- Quick servicing;
- A ready sales staff at hand and closer to the customers, which ensures high flexibility plus experience.

The production facilities are located throughout Reggio Emilia, Ozzano Emilia (BO), Noceto (PR), Novellara (RE), Yancheng (province of Jiangsu, China) which was inaugurated in 2009 and became operative since 2010.

Competitive Strategy

Innovation combined with the focus on customers is the strength of the Brevini Fluid Power "brand", born from the forty-year-long experiences of Aron, Hydr-App, SAM Hydraulik, Oleodinamica Reggiana, VPS Brevini and Brevini Hydraulics.

Brevini Fluid Power proposes itself as a "local hub", as it happened to BPE Electronics in 2008 and OT Oiltechnology in 2009, in order to create a new Made in Italy global player in the world of hydraulics, increasingly more integrated with electronics.

The purpose is still the development of a very large range of products forming together integrated packages able to meet various application needs. Our ten-year-long partnership relations with hundreds of customers all over the world are the best synthesis of Brevini Fluid Power's operational philosophy.

Sharing of know-how and several experiences have made Brevini Fluid Power a more global company, more incisive in international markets and closer to its customers.

Product lines

The product lines are numerous and well-structured aimed to cover every needs: a strong basis on which to develop the engineering of application packages and complete systems. The offer is improving in the direction of a solution supplier often developed in co-design with the customer, both for the mobile and industrial sector.

Hydr-App Product Line: Hydraulic power packs and mini hydraulic packs (whether standard or customised), cartridge valves and solenoid valves, gear boxes and transmission components.

S.A.M. Hydraulik Product Line: Axial piston pumps and motors for medium and high pressure, orbital motors.


Aron Product Line: Cetop directional, flow rate and pressure control valves, on/off and proportional valves. Modular and cartridge valves, subplates and blocks, bankable valves.

Brevini Hydraulics Product Line: Proportional directional valves, joysticks and electronic modules.

BPE Electronics Product Line: Sensors, load cells, boards and electronic controls via CAN, display units, planarity indicators.

VPS Brevini Product Line: Mono-block and modular mobile valves.

OT Oiltechnology Product Line: Gear pumps and motors, flow dividers.

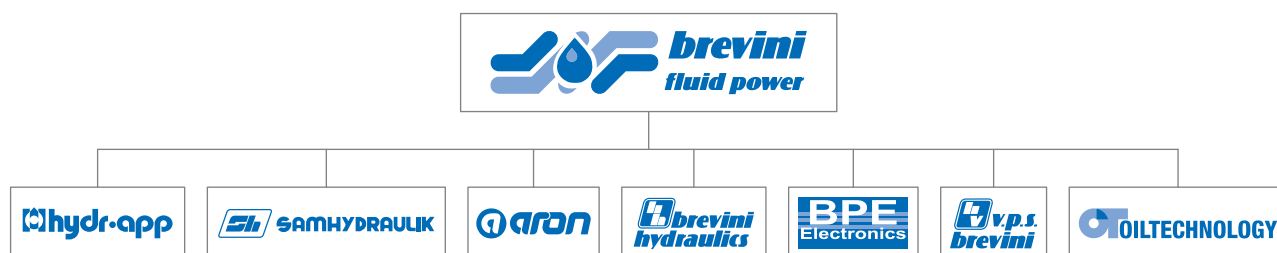

Section index

Index and technical information	0
Pressure relief valves	1
Sequence, pressure reducing and unloading valves	2
Double cross relief valves	3
One-way check valves	4
Pilot check valves	5
Manual and pneumatic operated valves	6
End-off stroke valves	7
Solenoid valves - 2-way	8
Solenoid valves - 3-4 way	9
Diverter valves	10
Soft start valves	11
Flow control valves	12
Hand pumps	13
Valve housings	14
Cavities	15
Standard plugs	16
Coils	17
Connectors	18

© 2015 Brevini Fluid Power S.p.A. All rights reserved. Hydr-App, SAM Hydraulik, Aron, Brevini Hydraulics, BPE Electronics, VPS Brevini, OT Oiltechnology, logos are trademarks or are registered trademarks of Brevini Fluid Power S.p.A. or other companies of the Brevini Group in Italy and other countries.


















The technical features supplied in this catalogue are non binding and no legal action can be taken against such material. Brevini Fluid Power will not be held responsible for information and specifications which may lead to error or incorrect interpretations. Given the continuous technical research aimed at improved technical features of our products, Brevini Fluid Power reserves the right to make change that are considered appropriate without any prior notice. This catalogue cannot be reproduced (in whole or in part) without the prior written consent of Brevini Fluid Power. This catalogue supersedes all previous ones.

Use of the products in this catalogue must comply with the operating limits given in the technical specifications. The type of application and operating conditions must be assessed as normal or in malfunction in order to avoid endangering the safety of people and/or items.








General terms and conditions of sale: see website www.brevinifluidpower.com.

The products shown on this catalog are parts of  line.


1 PRESSURE RELIEF VALVES (page 11)

Code	Thread	Flow (l/min)	Symbol	Description	Page
CMP-HPV	M14x1.5	5		DIRECT ACTING PRESSURE RELIEF VALVES (FOR HPV VALVES)	12
CMP-MR/MW	M15x1	6		DIRECT ACTING PRESSURE RELIEF VALVES (FOR POWER PACKS SERIES MR/MW)	13
CMP02	M16x1	20		DIRECT ACTING PRESSURE RELIEF VALVES	14
CMP04	3/4-16UNF	30		DIRECT ACTING PRESSURE RELIEF VALVES	15
CMPR04	3/4-16UNF	20		DIRECT ACTING PRESSURE RELIEF VALVES WITH ONE-WAY CHECK VALVE	16
CMPHR04	3/4-16UNF	15		DIRECT ACTING HIGH PRESSURE RELIEF VALVES WITH ONE-WAY CHECK VALVE	17
CMP-MC/MS	M18x1.5	20		DIRECT ACTING PRESSURE RELIEF VALVES (FOR POWER PACKS SERIES MC/MS)	18
CMP06	M20x1.5	30		DIRECT ACTING PRESSURE RELIEF VALVES	19
CP06	7/8-14UNF	50		DIRECT ACTING PRESSURE RELIEF VALVES	20
CMP20	M33x2	80		DIRECT ACTING PRESSURE RELIEF VALVES	21
CMP30	M22x1.5	100		PILOT OPERATED PRESSURE RELIEF VALVES	22
VMP02	1/4" BSP	30		DIRECT ACTING PRESSURE RELIEF VALVES IN-LINE MOUNTING	23
VMP06	3/8" BSP	50		DIRECT ACTING PRESSURE RELIEF VALVES IN-LINE MOUNTING	24
VMP10	3/8" BSP	40		DIRECT ACTING PRESSURE RELIEF VALVES IN-LINE MOUNTING	25
VMP20	1/2" BSP	80		DIRECT ACTING PRESSURE RELIEF VALVES IN-LINE MOUNTING	26
VMP30	3/4" BSP	100		PILOT OPERATED PRESSURE RELIEF VALVES IN-LINE MOUNTING	27
VMP12	BSP: 3/4" - 1"	150		PILOT OPERATED PRESSURE RELIEF VALVES IN-LINE MOUNTING	28














2 SEQUENCE, PRESSURE REDUCING AND UNLOADING VALVES (page 29)

Code	Thread	Flow (l/min)	Symbol	Description	Page
CSQ04	3/4-16UNF	30		SEQUENCE VALVES - DIRECTLY OPERATED	30
CSMK04	3/4-16UNF	10		SEQUENCE VALVES - DIRECTLY OPERATED (FOR MK3 SERIES POWER PACKS)	31
CVS20	M22x1.5	90		SEQUENCE VALVES - PILOT OPERATED	32
CVR06	7/8-14UNF	20		PRESSURE REDUCING VALVES WITH RELIEVING - DIRECT OPERATED	33
CVR20	M22x1.5	150		PRESSURE REDUCING VALVES WITH RELIEVING - PILOT OPERATED	34
CVE06	7/8-14UNF	30		SEQUENCE VALVES	35
CRC1	1/2" BSP	90		PRESSURE REDUCING AND SEQUENCE VALVES IN-LINE MOUNTING	36




3 DOUBLE CROSS RELIEF VALVES (page 37)

Code	Thread	Flow (l/min)	Symbol	Description	Page
VADIL	BSP: 1/4" - 3/8"	30		DOUBLE CROSS RELIEF VALVES DIRECT ACTING IN-LINE MOUNTING	38




4 ONE-WAY CHECK VALVES (page 39)

Code	Thread	Flow (l/min)	Symbol	Description	Page
CRU-MR	M15x1	10		ONE-WAY CHECK VALVES	40
CRU-MC/MS	M16x1.5	20		ONE-WAY CHECK VALVES	41
CRU04	3/4-16UNF	40		ONE-WAY CHECK VALVES	42
CRU06	7/8-14UNF	60		ONE-WAY CHECK VALVES	43
CR104	3/4-16UNF	20		ONE-WAY CHECK VALVES (FOR POWER PACKS SERIES FP)	44
VR06	3/8" BSP	30		ONE-WAY CHECK VALVES	45
VUI	BSP: 1/4" - 3/8" - 1/2"	20 - 50 - 80		ONE-WAY CHECK VALVES	46
VRU	BSP: 1/4" - 3/8" 1/2" - 3/4 - 1" 1" 1/4 - 1" 1/2	20 - 35 - 50 80 - 140 200 - 310		ONE-WAY CHECK VALVES IN-LINE MOUNTING	47
VUBA	BSP: 1/4" - 3/8" 1/2" - 3/4	4 - 6.3 16 - 25		CHECK VALVES FOR PIPES	48
SH02	1/8" BSP	8		SHUTTLE VALVES	50
SH03	1/4" BSP	5		SHUTTLE VALVES	51
RVLV0	M16x1.5	7		SHUTTLE VALVES	52
RVLV1	M27x1.5	140		PUMP UNLOADING VALVES	53



5 PILOT CHECK VALVES (page 55)

Code	Thread	Flow (l/min)	Symbol	Description	Page
VRS	1/4" BSP BSP: 1/4" - 3/8" - 1/2" - 3/4"	12 - 30 45 - 85		SINGLE ACTING PILOTED CHECK VALVES	56
VBPSA-VBPDA	BSP: 1/4" - 3/8" 1/2" - 3/4" 9/16-18 UNF	20 - 25 45 - 85		SINGLE AND DOUBLE ACTING PILOT CHECK VALVES	57
VBPSA-VBPDA DIN	BSP: 1/4" - 3/8"	20 - 25		SINGLE AND DOUBLE ACTING PILOT CHECK VALVES-DIN 2353 PORTS	59







6 MANUAL AND PNEUMATIC OPERATED VALVES (page 61)

Code	Thread	Flow (l/min)	Symbol	Description	Page
CMF04	3/4-16UNF	15		LEVER OPERATED VALVES	62
CPE04	3/4-16UNF	30		BUTTON OPERATED VALVES	63
CRD04P	3/4-16UNF	30		PNEUMATIC OPERATED VALVES	64

7 END-OFF STROKE VALVES (page 65)

Code	Thread	Flow (l/min)	Symbol	Description	Page
VFC	3/8" BSP	40		END-OFF STROKE VALVES IN-LINE MOUNTING	66
VD40	1/2" BSP	40		DECELERATION VALVES IN-LINE MOUNTING	67

8 SOLENOID VALVES - 2-WAY (page 69)

Code	Thread	Flow (l/min)	Symbol	Description	Page
CRB04	3/4-16UNF	40		PILOTED OPERATED CARTRIDGE SOLENOID VALVE BIDIRECTIONAL	70
CRP04	3/4-16UNF	40		PILOTED OPERATED CARTRIDGE SOLENOID VALVE UNIDIRECTIONAL	70
CRP04HP	3/4-16UNF	30		HIGH PRESSURE PILOTED OPERATED CARTRIDGE SOLENOID VALVE	72
CRP04X	3/4-16UNF	20		VALVES IN ACCORDANCE WITH ATEX 94/9/CE DIRECTIVE	74
CRD04	3/4-16UNF	15 - 30		DIRECT OPERATED CARTRIDGE SOLENOID VALVE	76
C2V04	3/4-16UNF	15		CARTRIDGE SOLENOID VALVES 2 WAY 2 POSITIONS	78

9 SOLENOID VALVES - 3-4 WAY (page 79)

Code	Thread	Flow (l/min)	Symbol	Description	Page
C3V0422	3/4-16UNF	12		SOLENOID VALVES 3-WAY/2-POSITION	80
C3V0427	3/4-16UNF	20		SOLENOID VALVES 3-WAY/2-POSITION	81
C3V03	7/8-14UNF	20		SOLENOID VALVES 3 WAY 2 POSITIONS	82
C4V0422*2	3/4-16UNF	18		SOLENOID VALVES 4 WAY 2 POSITIONS	83
C4V0422*3	3/4-16UNF	18		SOLENOID VALVES 4 WAY 3 POSITIONS	84












10 DIVERTER VALVES (page 85)

Code	Thread	Flow (l/min)	Symbol	Description	Page
MR	1/4" BSP 1/4"BSPT	—		PRESSURE GAUGE SHUT-OFF IN-LINE MOUNTING	86
RBS	BSP: 1/8" - 1/4" 3/8" - 1/2" - 3/4" 1" - 1 1/4" - 1 1/2"	5 - 10 - 25 40 - 100 - 150		HIGH PRESSURE - 2 WAY BALL VALVES IN-LINE MOUNTING	87
BK3	BSP: 1/8" - 1/4" 3/8" - 1/2" - 3/4" 1" - 1 1/4" - 1 1/2"	5 - 10 - 25 70 - 100 - 150		HIGH PRESSURE - 3 WAY BALL VALVES IN-LINE MOUNTING	88
DDF	BSP: 1/4" - 3/8" 1/2" - 3/4" - 1"	60 - 90 120 - 200		DIVERTER VALVES IN-LINE MOUNTING	89


11 SOFT START VALVES (page 91)

Code	Thread	Flow (l/min)	Symbol	Description	Page
VAM04	1/4" BSP	20		SINGLE-PHASE MOTOR START VALVE IN-LINE MOUNTING	92
VAMS04	1/4" BSP	8		SOFT START VALVE IN-LINE MOUNTING	93

12 FLOW CONTROL VALVES (page 95)

Code	Thread	Flow (l/min)	Symbol	Description	Page
SU/SB	M10x1	15		UNIDIRECTIONAL AND BIDIRECTIONAL FLOW REGULATOR VALVES	96
VSU	1/4" BSP	20		FIXED UNIDIRECTIONAL FLOW CONTROL VALVE	97
CSB04	3/4-16UNF	40		BIDIRECTIONAL NOT COMPENSATED FLOW CONTROL VALVE	98
CSC04	3/4-16UNF	29		UNIDIRECTIONAL COMPENSATED FLOW CONTROL VALVE	99
VSC04	1/4" BSP	11,7		FIXED PRESSURE COMPENSATED FLOW CONTROL VALVE	100
VSC06	3/8" BSP	18,5		PRESSURE COMPENSATED FLOW CONTROL VALVES	101
CRF06	7/8-14UNF	50		PRIORITY FLOW CONTROL VALVE	102
CCP20	M22x1.5	50		TWO-WAY PRESSURE COMPENSATOR VALVE	103
VSR/USB	BSP: 1/4" - 3/8" 1/2" - 3/4" - 1"	15 - 30 45 - 85 - 100		SLEEVE FLOW CONTROL VALVES UNIDIRECTIONAL AND BIDIRECTIONAL - IN-LINE MOUNTING	104
STU/STB	BSP: 1/4" - 3/8" 1/2" - 3/4" - 1"	20 - 30 50 - 85 - 150		UNIDIRECTIONAL AND BIDIRECTIONAL FLOW REGULATOR VALVES - IN-LINE MOUNTING	105
STC	3/8" BSP	29		PRESSURE COMPENSATED FLOW UNIDIRECTIONAL FLOW REGULATOR VALVES - IN-LINE MOUNTING	106

13 HAND PUMPS (page 107)

Code	Thread	Flow (l/min)	Symbol	Description	Page
CPM04	3/4-16UNF	1cc - 2cc		HAND PUMP	108

VALVE	PAGE	VALVE	PAGE
BK3	88	RVLV1	53
C2V04	78	SH02	50
C3V03	82	SH03	51
C3V0422	80	STC	106
C3V0427	81	STU/STB	105
C4V0422*2	83	SU/SB	96
C4V0422*3	84	VADIL	38
CCP20	103	VAM04	92
CMF04	62	VAMS04	93
CMP02	14	VBPSA-VBPDA	58
CMP04	15	VBPSA-VBPDA DIN	59
CMP06	19	VD40	67
CMP20	21	VFC	66
CMP30	22	VMP02	23
CMP-HPV	12	VMP06	24
CMPHR04	17	VMP10	25
CMP-MC/MS	18	VMP12	28
CMP-MR/MW	13	VMP20	26
CMPR04	16	VMP30	27
CP06	20	VR06	45
CPE04	63	VRS	56
CPM04	108	VRU	47
CRB04 / CRP04	70	VSC04	100
CRC1	36	VSC06	101
CRD04	76	VSR/VSB	104
CRD04P	64	VSU	97
CRF06	102	VUBA	49
CRI04	44	VUI	46
CRP04HP	72		
CRP04X	74	INDEX	1
CRU04	42	TECHNICAL INFORMATION	9
CRU06	43	VALVE HOUSINGS	110
CRU-MC/MS	41	CAVITIES	114
CRU-MR	40	STANDARD PLUGS	120
CSB04	98	COILS	124
CSC04	99	CONNECTORS	130
CSMK04	31		
CSQ04	30		
CVE06	35		
CVR06	33		
CVR20	34		
CVS20	32		
DDF	89		
MR	86		
RBS	87		
RVLV0	52		

INTRODUCTION

Read this instructions carefully before installation. All operations must be carried out by qualified personnel following the instructions.

The user must periodically inspect, based on the conditions of use and the substances used, the presence of corrosion, dirt, the state of wear and correct function of the valves.

Always observe first the operating conditions given in datasheet of the valve.

HYDRAULIC FLUID

Observe the recommendations given in the data sheet of the valve. Use only mineral oil (HL, HLP) according to DIN 51524. Use of other different fluids may damage the good operation of the valve.

VISCOSITY


Observe the recommendations given in the data sheet of the valve. The oil viscosity must be in the range of 10 mm²/s to 500 mm²/s. Recommended oil viscosity 46 mm²/s (32 mm²/s for Cartridge valves)

Table 1: ISO viscosity grades


Viscosity grade	Average kinematic viscosity mm ² /s @ 40°C	Kinematic-viscosity limits mm ² /s @ 40°C	
		min.	max.
ISO VG 10	10	9.00	11.0
ISO VG 15	15	13.5	16.5
ISO VG 22	22	19.8	24.2
ISO VG 32	32	28.8	35.2
ISO VG 46	46	41.4	50.6
ISO VG 68	68	61.2	74.8
ISO VG 100	100	90.0	110

= Values used in the chart "Oil viscosity according to temperature"

CONVERSION TABLE SSU / °E / mm²/s

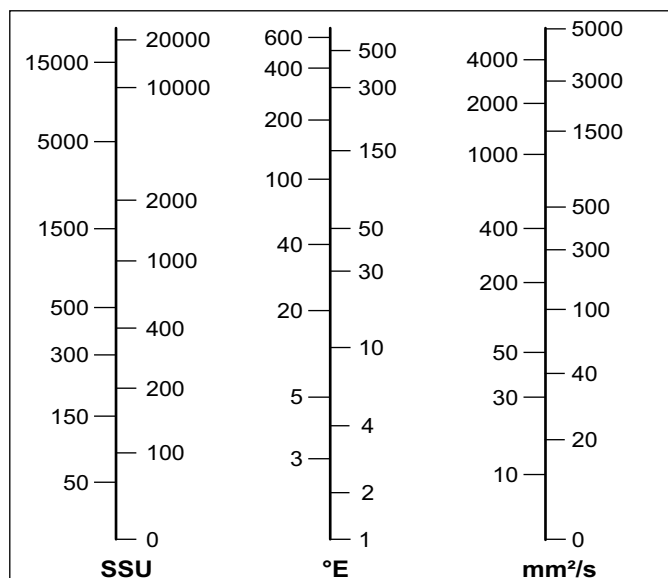

OIL VISCOSITY ACCORDING TO TEMPERATURE

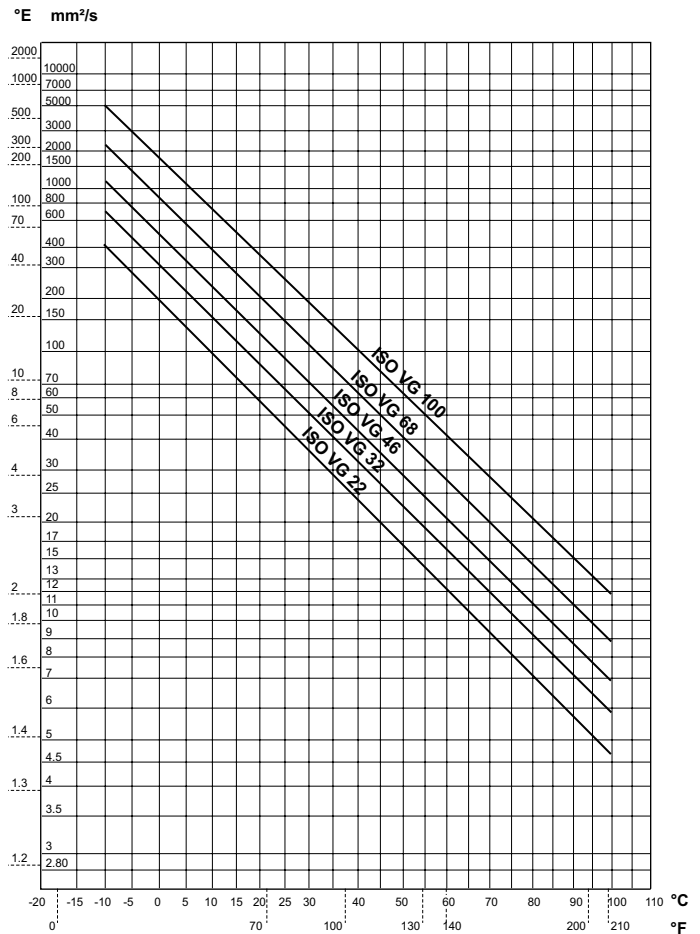

CONTAMINATION

Oil contamination is the main cause of faults and malfunction in hydraulic systems. Abrasive particles in the fluid erode or block moving parts, leading to system malfunction.

The valves we are offering do not require filtering characteristics any higher than those needed for usual hydraulic components such as pumps, motors, etc.

However, accurate filtering does guarantee reliability and a long life to all the system's hydraulic parts. Reliable performance and long working life for all oil-pressure parts is assured by maintaining the level of fluid contamination within the limits specified in the data sheet of the valve.

Hydraulic fluid must also be cleaned properly before filling the hydraulic circuit, especially when commissioning a new system, as this is when the oil contamination generally peaks due to its flushing effect on the components, and the running-in of the pump.

Maximum contamination level is required on datasheet of the valve according to ISO 4406:1999.

In the following table there is the correspondence between ISO 4406:1999 and old standard NAS 1638 for information purpose:

The standard ISO 4406:1999 defines the contamination level with three numbers that relate with the number of particles of average dimension equal or greater than 4 µm, 6 µm e 14 µm, in 1 ml of fluid.

In following table there is a reference to recommended contamination level and correspondence with old NAS 1638 standard.

Table 2: Recommended contamination level.

Type of system Type of valve	Oil filtration recommendations		
	Cleanliness class recommended		Absolute filtration micron rating (**)
	ISO 4406 : 1999	NAS 1638 (*)	
Systems or components operating at HIGH PRESSURE > 250 bar (3600 psi) HIGH DUTY CYCLE APPLICATIONS Systems or components with LOW dirt tolerance	18 / 16 / 13	7 - 8	5
Systems or components operating at MEDIUM / HIGH PRESSURE Systems and components with moderate dirt tolerance	19 / 17 / 14	9	10
Systems or components operating at LOW PRESSURE < 100 bar (1500 psi) LOW DUTY CYCLE APPLICATIONS Systems and components with GOOD dirt tolerance	20 / 18 / 15	10 - 11	20

* Contamination class NAS 1638: it is determined by counting the total particles of different size ranges contained in 100 ml of fluid.

** Absolute filtration: it is a characteristic of each filter, it refers the size (in micron) of the largest spherical particle which may pass through the filter.

WORKING TEMPERATURES

Ambient temperature range: -25°C to +60°C

Fluid temperature range (NBR seals): -25°C to +75°C

Thermal shocks can affect the performance and the expected life of the product, hence it is necessary to protect the product from these conditions.

SEALS

O-rings made in Acrylonitrile Butadiene (NBR) are normally fitted on the valves. The backup rings that protect the O-rings are also made in NBR, or sometimes PTFE. Both the O-rings and the backup rings are suitable for the working temperatures mentioned above.

In the case of fluid temperatures > 75°C, FKM seals must be used (identified with "V1" variant).

ELECTRICAL POWER SUPPLY

Solenoid valves coils are designed to operate safely in the voltage range of ±10% of nominal voltage at max. 60°C ambient temperature. The combination of permanent overvoltage and very hot temperatures can stress the solenoid. Therefore always a good heat dissipation and voltage level has to be assured. Faulty coils may only be replaced by new, interchangeable, tested components in original-equipment quality.

Before removing a coil, voltage must be disconnected.

When replacing the coil, be aware to insert O-Rings in order to avoid the entrance of water.

INSTALLATION

The mounting surface must feature surface quality specified in data sheet of the valve: for example for Cetop valves generally is required $Ra \leq 1.6\mu m$ and flatness ≤ 0.03 mm over 100 mm length. Normally in cartridge valve for sealing diameters of the cavities, is required roughness $Ra \leq 1.6\mu m$. The surfaces and openings in the assembly plate must be free from impurity or dirt.

Make sure the O-Rings fit correctly in their seats.

Fixing screws must comply with the dimensions and the strength class specified in the data sheet and must be tightened at the specified tightening torque.

Complete the electrical wiring. For circuit examples and pin assignments, see the relevant datasheet.

USE AND MAINTENANCE

Observe the functional limits indicated in the technical catalogue

On a periodic basis and based on the conditions of use, check for cleanliness, state of wear or fractures and correct performance of the valve.

If the O-rings are damaged, replace them with those supplied by the manufacturer.

To assure the best working conditions at all time, check the oil and replace it periodically (after the first 100 working hours and then after every 2000 working hours or at least once every year).

Attention: all installation and maintenance intervention must be performed by qualified staff.

TRANSPORT AND STORAGE

The valve must be handled with care to avoid damage caused by impact, which could compromise its efficiency.

In the case of storage, keep the valves in a dry place and protect against dust and corrosive substances.

When storing for periods of more than 6 months, fill the valve with preserving oils and seal it.


WARRANTY AND SUPPLY CONDITIONS

For the general warranty and supply conditions, please consult the specific sales contract or the "General terms and conditions of sale" document IOP 7-2-05. Downloaded from the website: www.brevinifluidpower.com


CONVERSION CHART

Type	SI units		Alternative units		Conversion factor
Force	Newton	(N) [kgm/s ²]	Kilogram force	(kgf)	1 kgf = 9.807 N
			pound force	(lbf) [lbf/s ²]	1 lbf = 4.448 N
Length	millimeter	(mm) [10 m]	inch	(in)	1 in = 25.4 mm
	meter	(km) [1000 m]	yard	(yd) [3ft]	1 m = 1.0936 yd
	kilometer	(km) [1000 m]	mile	(mile) [1760 yd]	1 mile = 1.609 km
Torque	Newton meter	(Nm)	pound force.feet	(lbf.ft)	1 lbf.ft = 1.356 Nm
Power	kiloWatt (kW)	[1000 Nm/s]	horsepower	(hp)	1 kW = 1.341 hp
			metric horsepower	(CV)	1 kW = 1.36 CV
Pressure	MegaPascal	(MPa) [N/mm ²]	bar		1 MPa = 10 bar
			psi (lbf/in ²)		1 MPa = 145 psi
			ton/f/in ²		1 ton/f/in ² = 15.45 MPa
Flow rate	liter/min	(l/min)	UK gal/min		1 UK gal/min = 4.546 l/min
			US gal/min		1 US gal/min = 3.785 l/min
Temperature	Degrees Celsius	(°C)	Fahrenheit	(°F)	1°F = 1.8 °C+32

PRESSURE RELIEF VALVES

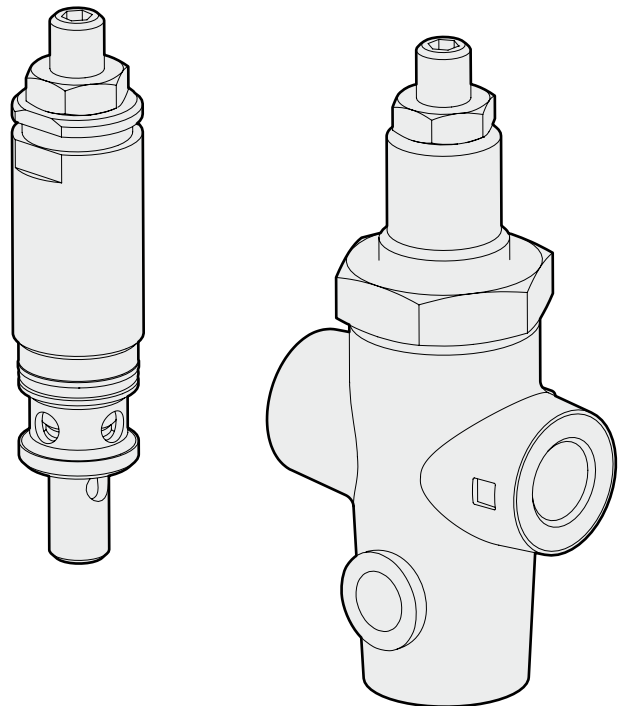

DIRECT ACTING PRESSURE RELIEF VALVES (FOR HPV VALVES)

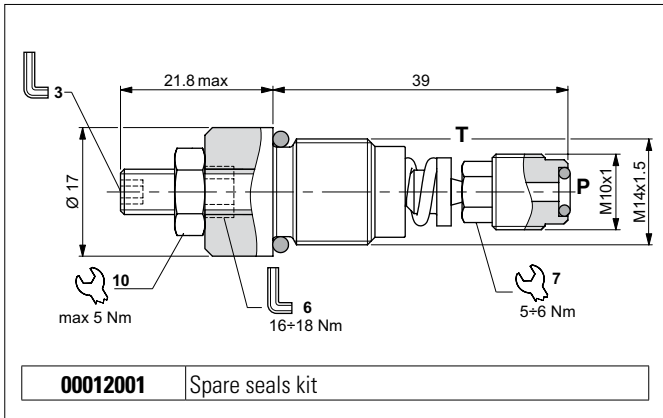


The direct acting relief valve limits the pressure in a hydraulic circuit to within the specified calibration range. It has a galvanised steel body. The tapered poppet is in tempered steel.

HYDRAULIC FEATURES

Max. working pressure	400 bar
Max. Flow	5 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.038 kg
Tightening torque	see draw
Cavity (M14x1.5)	CN032005 (See section 15)


HYDRAULIC SYMBOL




ORDERING CODE

Code	Description
RKVL1130002	Direct acting relief valve

PRESSURE-FLOW RATE

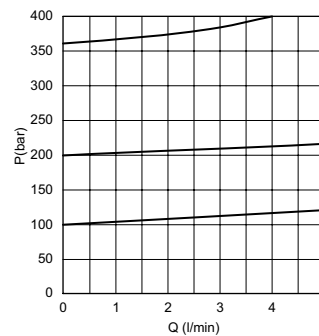


MIN.SETTING PRESSURE

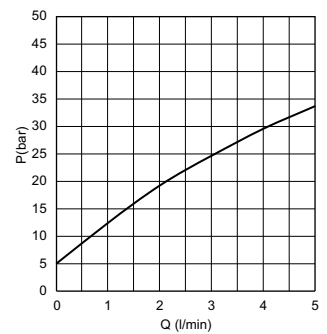

Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

DIRECT ACTING PRESSURE RELIEF VALVES (FOR POWER PACKS SERIES MR/MW)

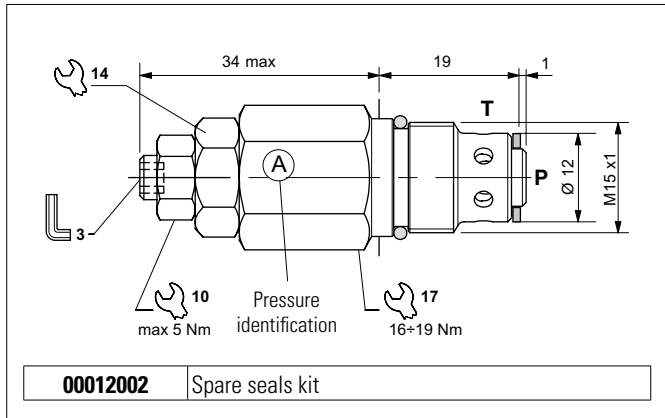


The direct acting relief valve limits the pressure in a hydraulic circuit. It raises the safety level by making it impossible for the plant operators to set a higher pressure rating, than that specified in the catalogue. It has a pack spring with a mechanical stop. It has a galvanised steel body. The guided ball poppet is in tempered and ground steel.

HYDRAULIC FEATURES

Max. working pressure	220 bar
Setting range:	
Spring A	25 ÷ 80 bar
Spring B	75 ÷ 220 bar
Spring C	5 ÷ 30 bar
Max. Flow	6 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.05 kg
Tightening torque	see draw
Cavity (M15x1)	CN033001 (See section 15)

HYDRAULIC SYMBOL




ORDERING CODE

Code	Identification (see draw)	Setting range	Pressure increasing at each turn of screw
21000010.000	A	25 ÷ 80 bar	17 bar ± 10%
21000011.000	B	75 ÷ 220 bar	45 bar ± 10%
21000009.000	C	5 ÷ 30 bar	7 bar ± 10%


The minimum permissible setting pressure depending on the spring: see curves below

PRESSURE-FLOW RATE

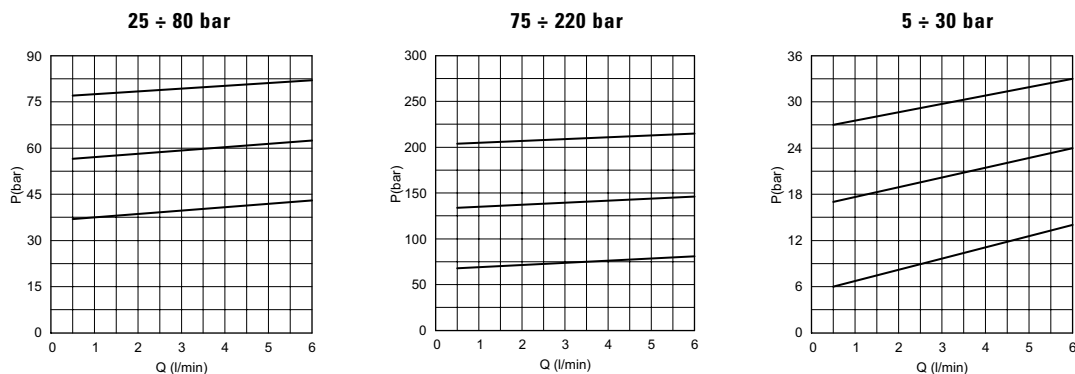

Fluid used: mineral based oil with viscosity 32 mm²/s at 50°C.

DIRECT ACTING PRESSURE RELIEF VALVES

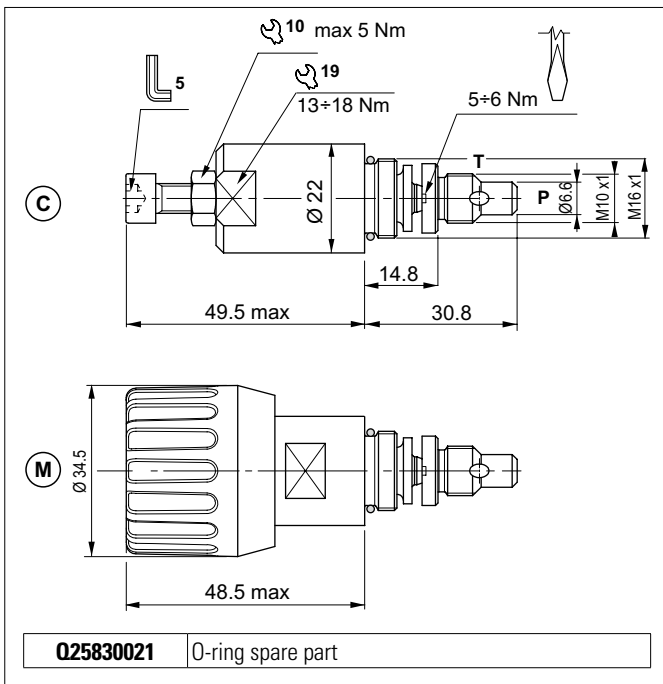


The direct acting relief valve limits the pressure in a hydraulic circuit. It raises the safety level by making it impossible for the plant operators to set a higher pressure rating, than that specified in the catalogue. This is limited by a pack spring with a mechanical stop (only standard screw and nut), which prevents temporary P closures caused by pressure peaks. It has a galvanised steel body. The guided ball poppet is in tempered and ground steel.


HYDRAULIC FEATURES

Max. working pressure	250 bar
Setting range:	
Spring 1 (white)	max 30 bar
Spring 2 (yellow)	max 90 bar
Spring 3 (green)	max 180 bar
Spring 4 (orange)	max 250 bar
Max. Flow	20 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.1 kg
Tightening torque	see draw
Cavity (M16x1)	CN036001 (See section 15)

HYDRAULIC SYMBOL




PRESSURE-FLOW RATE

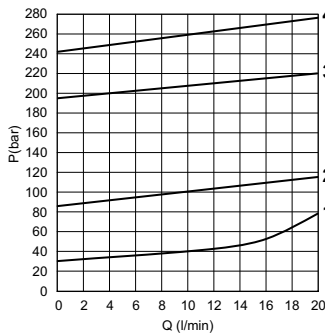


1 = CMP02C1.. - 2 = CMP02C2.. - 3 = CMP02C3.. - 4 = CMP02C4..
Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

MIN.SETTING PRESSURE

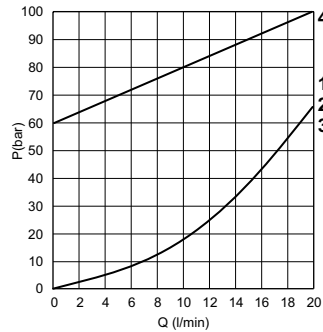


The minimum permissible setting pressure depending on the spring: see curves below


ORDERING CODE

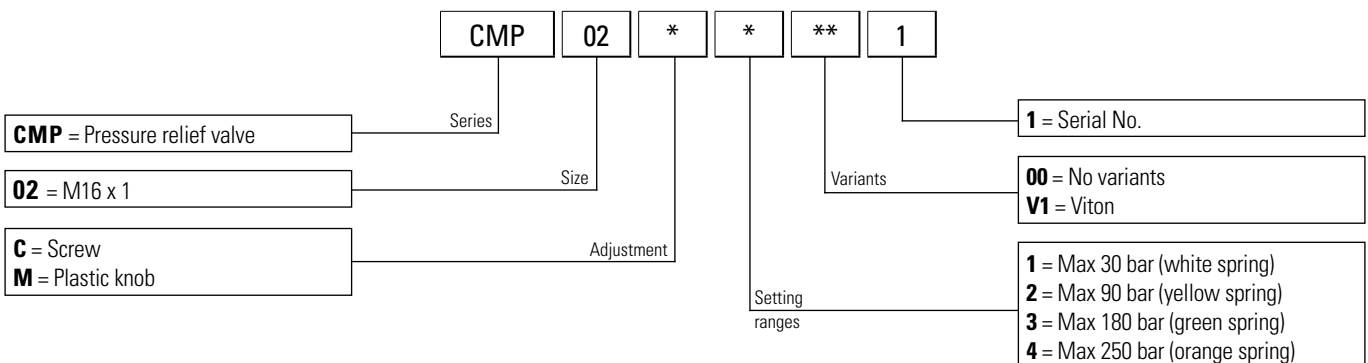

DIRECT ACTING PRESSURE RELIEF VALVES

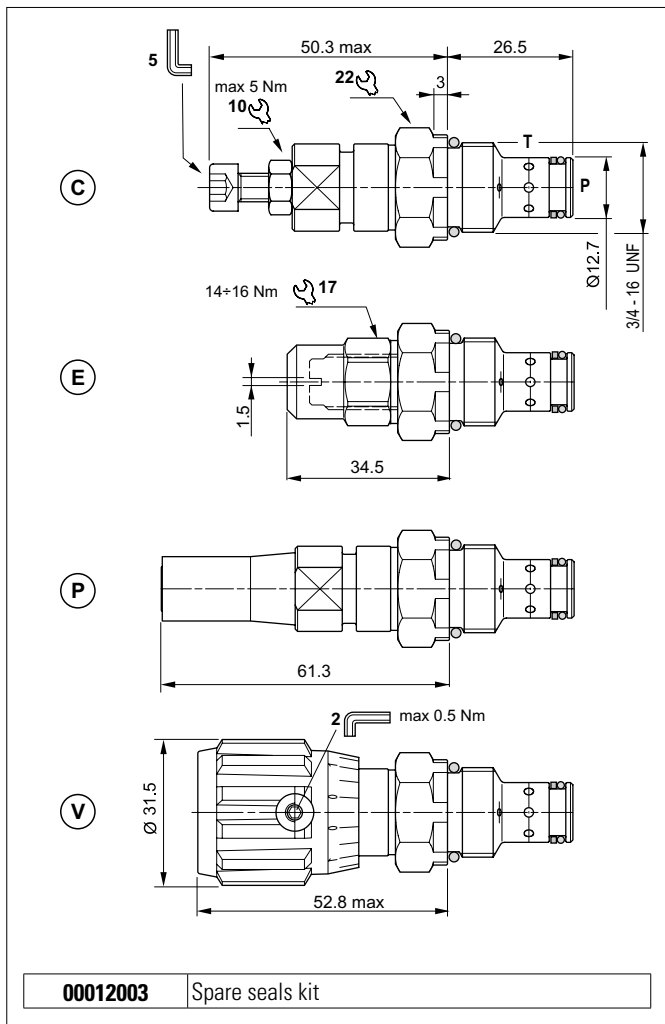

HYDRAULIC SYMBOL




The direct acting relief valve limits the pressure in a hydraulic circuit. It raises the safety level by making it impossible for the plant operators to set a higher pressure rating, than that specified in the catalogue. It has a pack spring with a mechanical stop (only standard screw and nut). It has a galvanised steel body. The guided ball poppet is in tempered and ground steel.

HYDRAULIC FEATURES


Max. working pressure	330 bar
Setting range:	
Spring 1 (white)	max 70 bar
Spring 2 (yellow)	max 160 bar
Spring 3 (green)	max 330 bar
Max. Flow	30 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.092 kg
Tightening torque	25 ÷ 30 Nm
Cavity (3/4 - 16 UNF)	CD018006 (See section 15)

The minimum permissible setting pressure depending on the spring: see curves below

PRESSURE-FLOW RATE

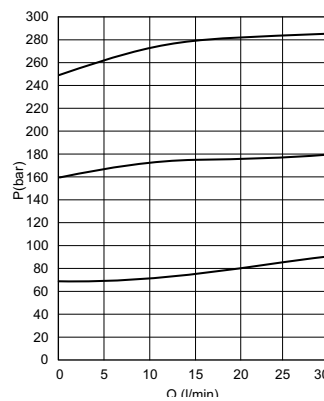


MIN. SETTING PRESSURE

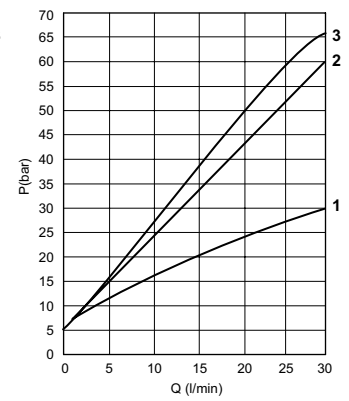


1 = CMP04*1.. - 2 = CMP04*2.. - 3 = CMP04*3..

Fluid used: mineral based oil with viscosity 32 mm²/s at 40°C.

ORDERING CODE

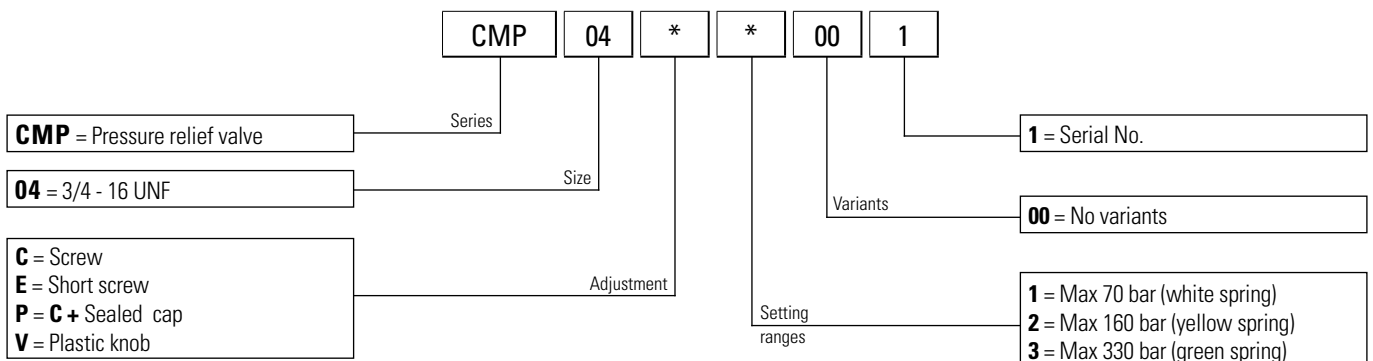

DIRECT ACTING PRESSURE RELIEF VALVES WITH ONE-WAY CHECK VALVE

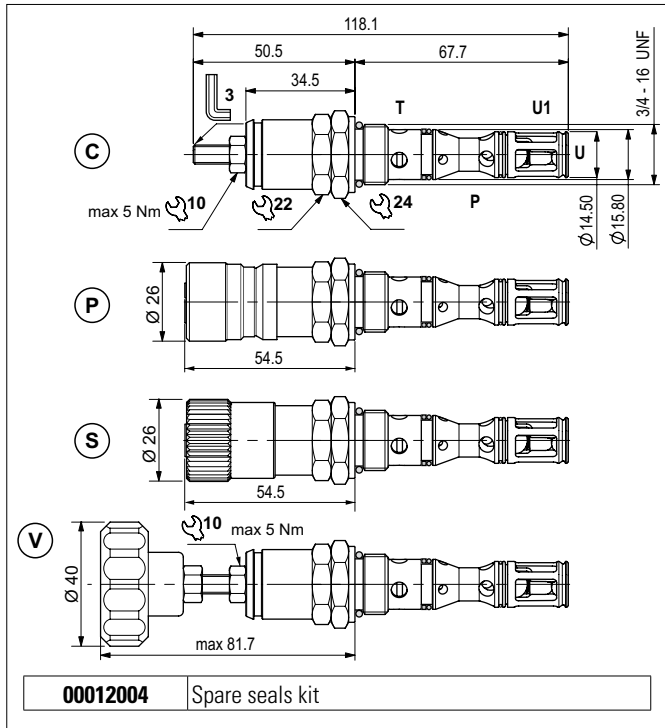

The valve has a combined function in a single cartridge. It consists of a direct acting maximum pressure valve and a unidirectional check valve.

The relief valve raises the safety level by making it impossible for the plant operators to set a higher pressure rating, than that specified in the catalogue. It has a pack spring with a mechanical stop.


The spring in the check valve enables the cartridge to be mounted in any position.

It has a galvanised steel body. The tapered poppet of the relief valve and the guided ball poppet are made from tempered and ground steel.


HYDRAULIC FEATURES

Max. working pressure	320 bar
Max. Flow	20 l/min
Setting ranges (spring)	1 = 10 ÷ 60 bar (green) 2 = > 60 ÷ 180 bar (yellow) 3 = > 180 ÷ 320 bar (blue)
One-way check	0,5 bar (standard)
Check valve leakage (0 ÷ 5 drops/min)	0 ÷ 0.25 cm ³ /min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.18 kg
Tightening torque	25 ÷ 30 Nm
Cavity (3/4 - 16 UNF)	CD018013 (See section 15)


HYDRAULIC SYMBOL

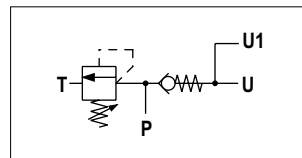


PRESSURE DROPS (P → U)

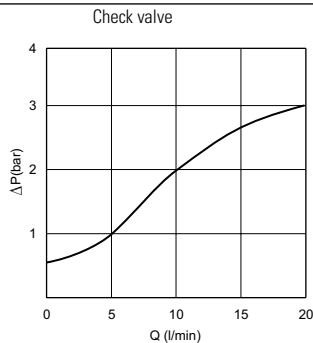

MIN. SETTING PRESSURE (P → T)

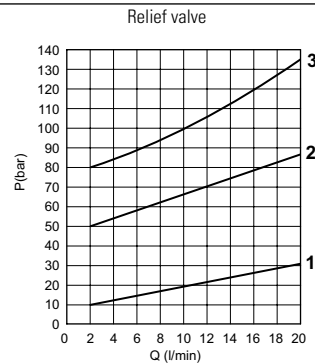

PRESSURE - FLOW (P → T)

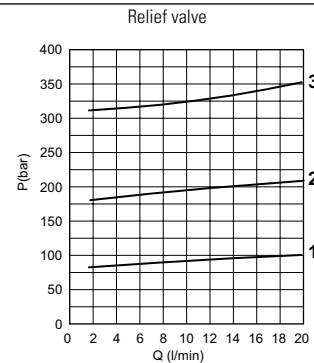


Fluid used: mineral based oil with viscosity 32 mm²/s at 50°C.

ORDERING CODE

CMP = Pressure relief valve	Series	R = With check valve	Size	04 = 3/4 - 16 UNF	Setting	*	*	*	00 = No variants	1 = Serial No.
C = Screw		P = C + Plug no detachable closing (unremovable version)								
S = C + Plug detachable closing		V = Handwheel								
										0 = With standard check-valve
										S = Without standard check-valve

DIRECT ACTING HIGH PRESSURE RELIEF VALVES WITH ONE-WAY CHECK VALVE

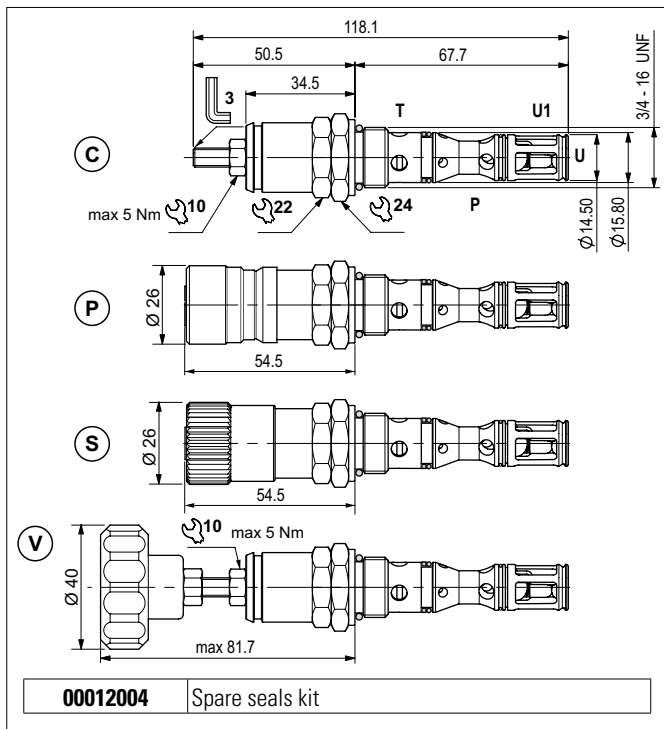


The valve has a combined function in a single cartridge. It consists of a direct acting maximum pressure valve and a unidirectional check valve. The relief valve raises the safety level by making it impossible for the plant operators to set a higher pressure rating, than that specified in the catalogue. It has a pack spring with a mechanical stop. The spring in the check valve enables the cartridge to be mounted in any position. It has a galvanised steel body. The tapered poppet of the relief valve and the guided ball poppet are made from tempered and ground steel.


HYDRAULIC FEATURES

Max. working pressure	360 bar
Max. Flow	15 l/min
Setting ranges (spring)	1 = > 320 ÷ 360 bar (blue)
One-way check	0.5 bar (standard)
Check valve leakage (0 ÷ 5 drops/min)	0 ÷ 0.25 cm ³ /min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.18 kg
Tightening torque	25 ÷ 30 Nm
Cavity (3/4 - 16 UNF)	CD018013 (See section 15)


HYDRAULIC SYMBOL

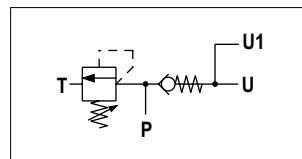

PRESSURE DROPS (P → U)

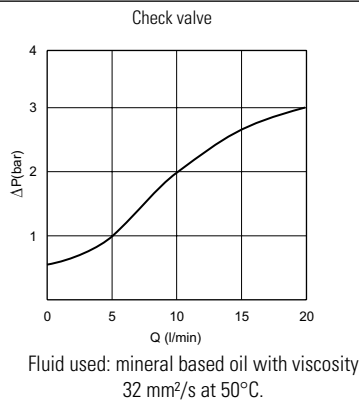


PRESSURE - FLOW (P → T)

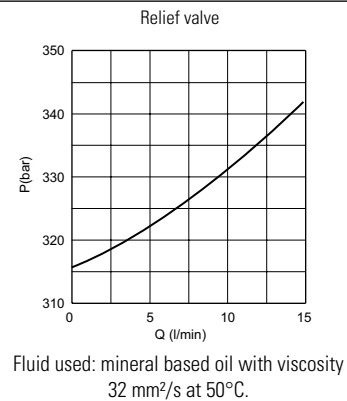

ORDERING CODE

CMPH = High pressure relief valve	Series	R = With check valve	Size	04 = 3/4 - 16 UNF	Setting	*	*	1	Settings	00 = No variants	Serial No.	1 = Serial No.
C = Screw		P = C + Plug no detachable closing (unremovable version)							Setting ranges	1 = > 320 ÷ 360 bar (blue spring)		
S = C + Plug detachable closing		V = Handwheel										0 = With standard check-valve S = Without standard check-valve

DIRECT ACTING PRESSURE RELIEF VALVES (FOR POWER PACKS SERIES MC/MS)

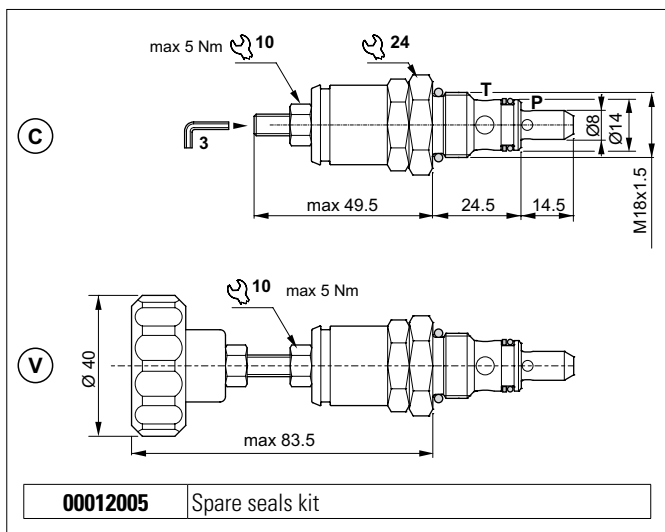

The direct acting relief valve limits the pressure in a hydraulic circuit. It raises the safety level by making it impossible for the plant operators to set a higher pressure rating, than that specified in the catalogue. It has a pack spring with a mechanical stop. It has a galvanised steel body. The guided ball poppet is in tempered and ground steel.

HYDRAULIC FEATURES


Max. working pressure	290 bar
Setting range:	
Spring 0 (white)	max 50 bar
Spring 1 (green)	max 90 bar
Spring 2 (yellow)	max 190 bar
Spring 3 (red)	max 290 bar
Max. Flow	20 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0,12 kg
Tightening torque	28 ÷ 32 Nm
Cavity (M18x1.5)	CN041009 (See section 15)

The minimum permissible setting pressure depending on the spring: see curves below


ACCESSORIES

Detachable plug	Code
Unremovable version 	60309200
Removable version 	60309100


HYDRAULIC SYMBOL



PRESSURE-FLOW RATE

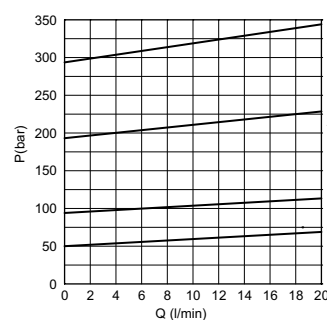

MIN. SETTING PRESSURE

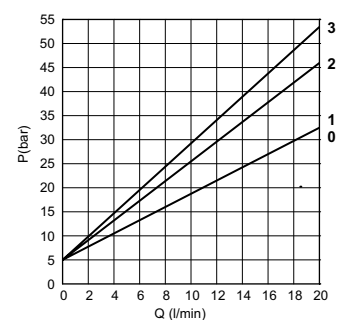


0 = 0 ÷ 50 bar - 1 = 35 ÷ 90 bar - 2 = 75 ÷ 190 bar - 3 = 160 ÷ 290 bar
 Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

ORDERING CODE

Adjustment	Setting ranges	Code
C Screw	0 ÷ 50 bar (white spring)	21000016.000
	35 ÷ 90 bar (green spring)	21000000.000
	75 ÷ 190 bar (yellow spring)	21000001.000
	160 ÷ 290 bar (red spring)	21000002.000

Adjustment	Setting ranges	Code
V Handwheel	0 ÷ 50 bar (white spring)	21000017.000
	35 ÷ 90 bar (green spring)	21000003.000
	75 ÷ 190 bar (yellow spring)	21000004.000
	160 ÷ 290 bar (red spring)	21000005.000

DIRECT ACTING PRESSURE RELIEF VALVES

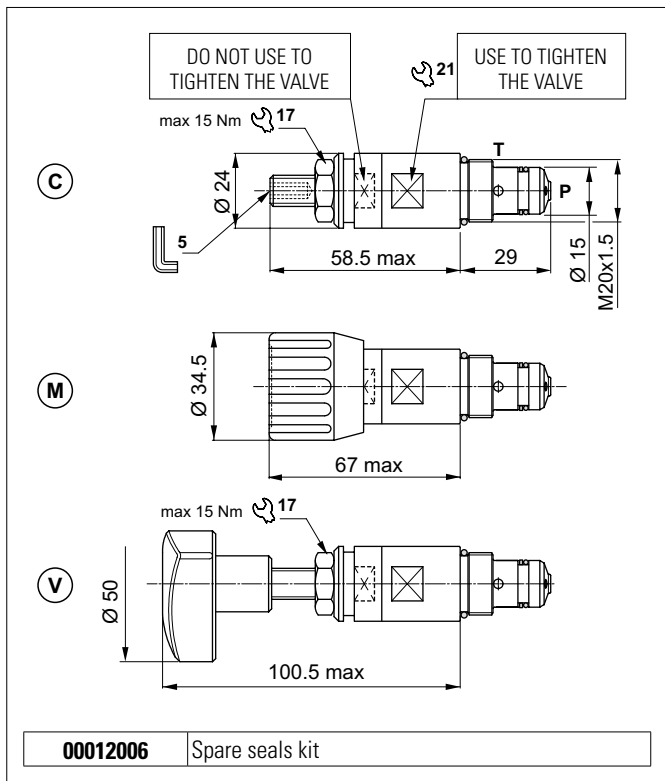


The direct acting relief valve limits the pressure in a hydraulic circuit. It raises the safety level by making it impossible for the plant operators to set a higher pressure rating, than that specified in the catalogue. This is limited by a pack spring with a mechanical stop, which prevents temporary P closures caused by pressure peaks. It has a galvanised steel body. The guided ball poppet is in tempered and ground steel.

HYDRAULIC FEATURES


Max. working pressure	290 bar
Setting range:	
Spring 1 (white)	max 30 bar
Spring 2 (yellow)	max 90 bar
Spring 3 (green)	max 290 bar
Max. Flow	30 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.17 kg
Tightening torque	30 ÷ 35 Nm
Cavity (M20x1.5)	CN044001 (See section 15)

The minimum permissible setting pressure depending on the spring: see curves below


HYDRAULIC SYMBOL



PRESSURE-FLOW RATE

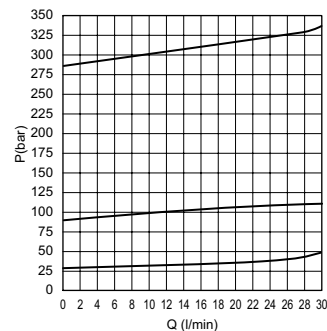


MIN. SETTING PRESSURE

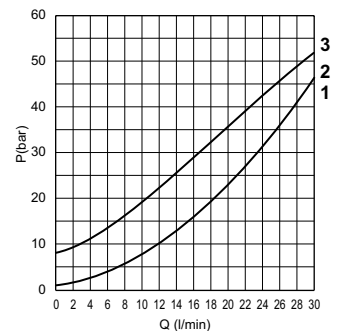


1 = CMP06.1.. - 2 = CMP06.2.. - 3 = CMP06.3..

Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

ORDERING CODE

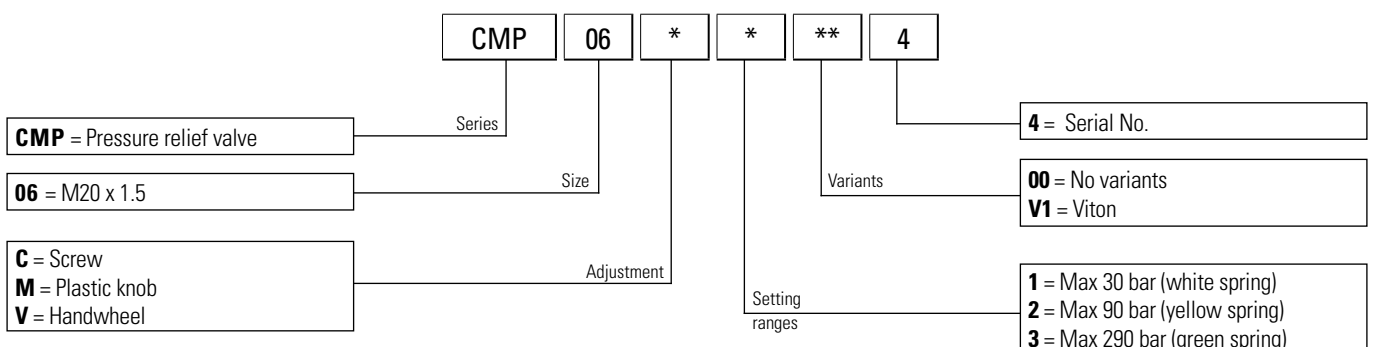

DIRECT ACTING PRESSURE RELIEF VALVES

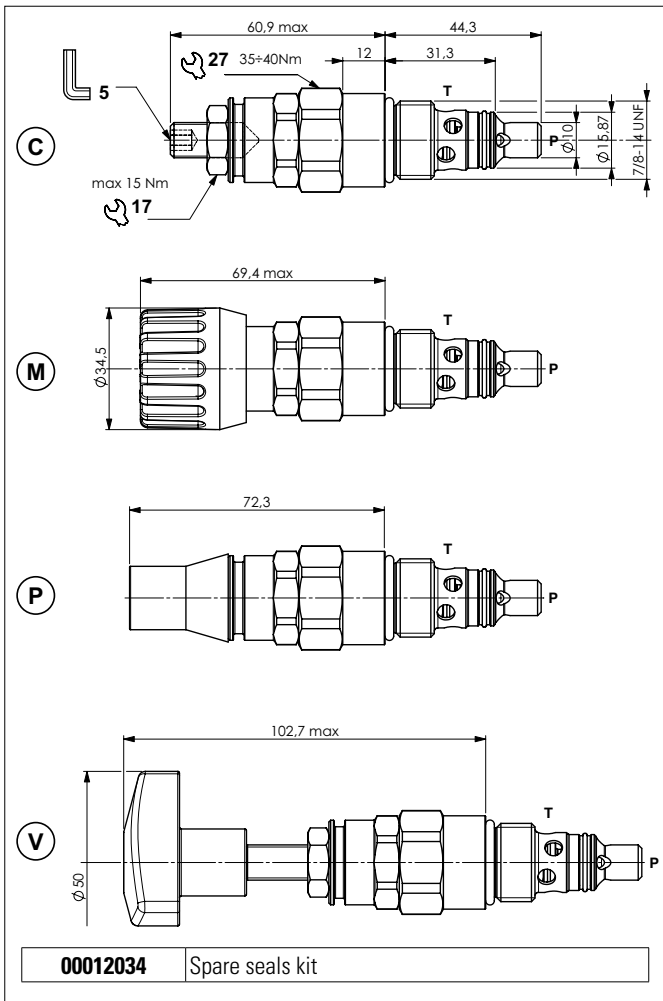


The direct acting relief valve limits the pressure in a hydraulic circuit. It raises the safety level by making it impossible for the plant operators to set a higher pressure rating, than that specified in the catalogue. This is limited by a pack spring with a mechanical stop. It has a galvanised steel body. The guided ball poppet is in tempered and ground steel.

HYDRAULIC FEATURES


Max. working pressure	350 bar
Setting range:	
Spring 1 (orange)	max 15 bar
Spring 1 (white)	max 50 bar
Spring 2 (yellow)	max 170 bar
Spring 3 (neutral)	70 ÷ 350 bar
Max. Flow	50 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.22 kg
Tightening torque	35 ÷ 40 Nm
Cavity (7/8 - 14 UNF)	CD019011 (See section 15)

The minimum permissible setting pressure depending on the spring: see curves below


HYDRAULIC SYMBOL



PRESSURE-FLOW RATE

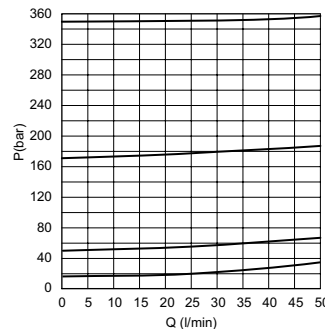


MIN. SETTING PRESSURE

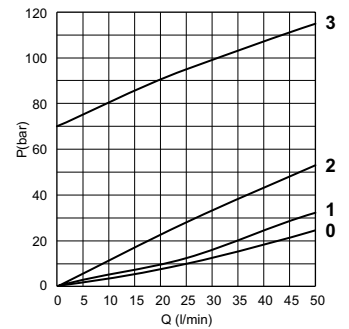


0 = CP06.0.. - 1 = CP06.1.. - 2 = CP06.2.. - 3 = CP06.3..
 Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

ORDERING CODE

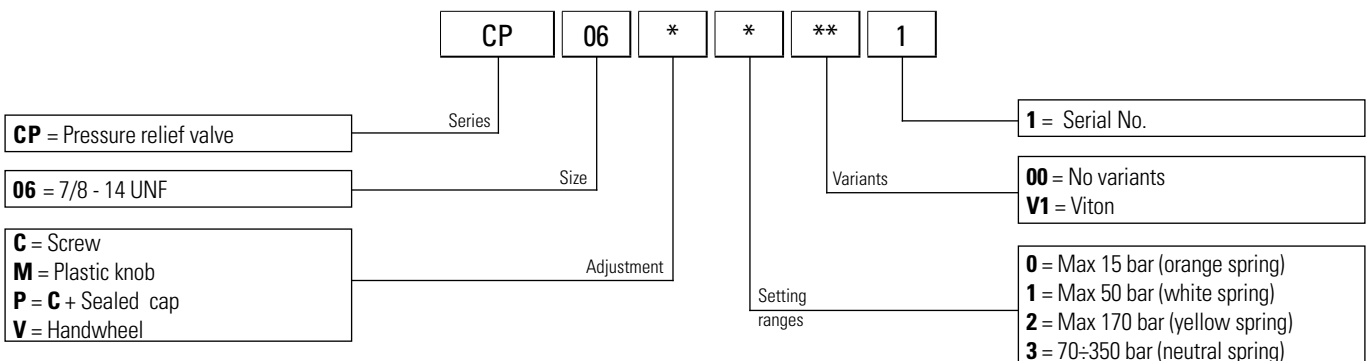

DIRECT ACTING PRESSURE RELIEF VALVES

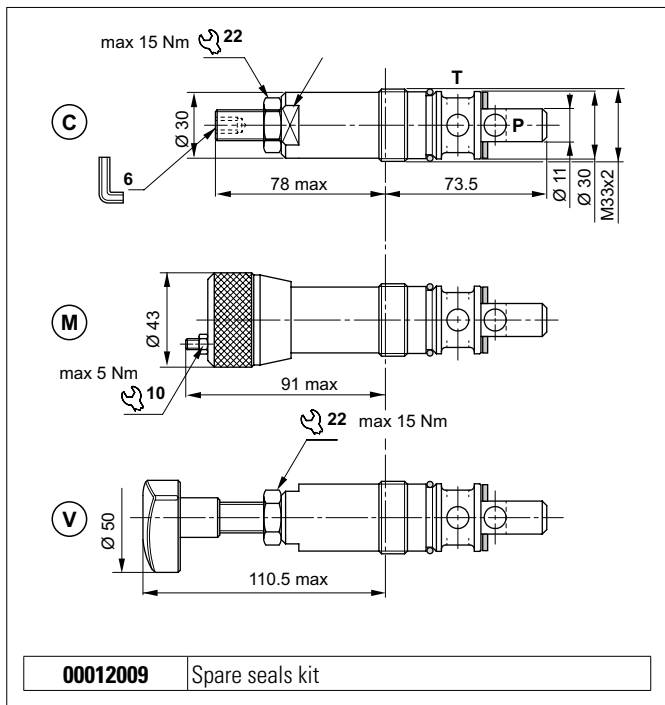


The direct acting relief valve limits the pressure in the hydraulic circuit to the calibration levels specified in the catalogue. It has a galvanised steel body. The guided ball poppet is in tempered and ground steel.

HYDRAULIC FEATURES


Max. working pressure	250 bar
Setting range:	
Spring 1 (white)	max 30 bar
Spring 2 (yellow)	max 140 bar
Spring 3 (green)	max 250 bar
Max. Flow	80 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.5 kg
Tightening torque	80 ÷ 90 Nm
Cavity (M33x2)	CN070001 (See section 15)

HYDRAULIC SYMBOL




The minimum permissible setting pressure depending on the spring: see curves below

PRESSURE-FLOW RATE

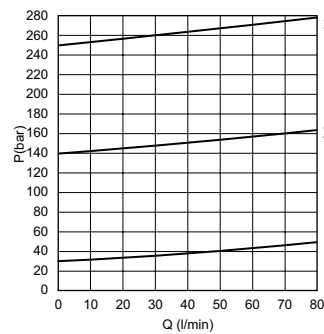


MIN. SETTING PRESSURE

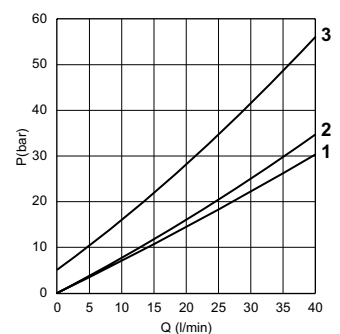


1 = CMP20.1.. - 2 = CMP20.2.. - 3 = CMP20.3..

Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

ORDERING CODE

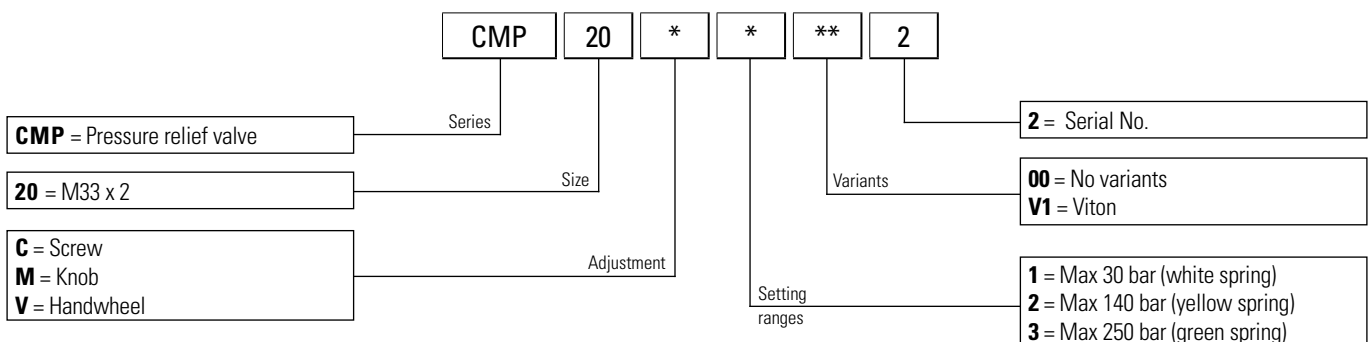

PILOT OPERATED PRESSURE RELIEF VALVES

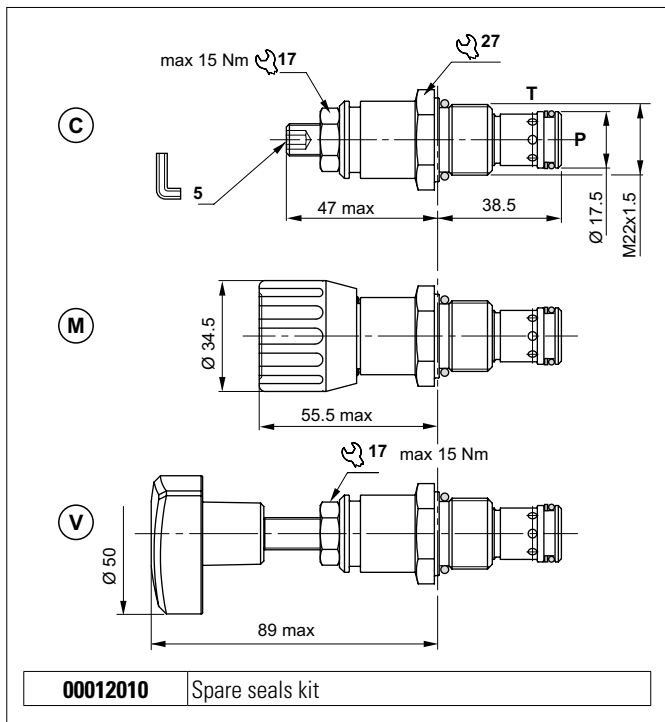


The pilot-operated relief valve limits the pressure in the hydraulic circuit. Slight leakage is tolerated for this type of valve. It raises the safety level by making it impossible for the plant operators to set a higher pressure rating, than that specified in the catalogue. It has a pack spring with a mechanical stop. It has a galvanised steel body. The tapered pilot poppet and cylindrical main plunger are made from tempered and ground steel.

HYDRAULIC FEATURES


Max. working pressure	350 bar
Setting range:	
Spring 1 (white)	max 50 bar
Spring 2 (yellow)	max 140 bar
Spring 3 (green)	max 350 bar
Max. Flow	100 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.18 kg
Tightening torque	30 ÷ 40 Nm
Cavity (M22x1.5)	CN047003 (See section 15)

HYDRAULIC SYMBOL




The minimum permissible setting pressure depending on the spring: see curves below

PRESSURE-FLOW RATE

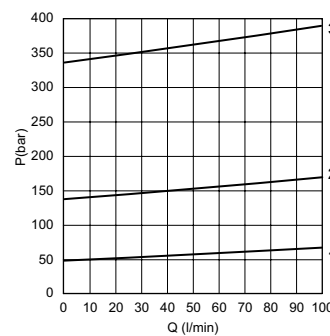


MIN.SETTING PRESSURE

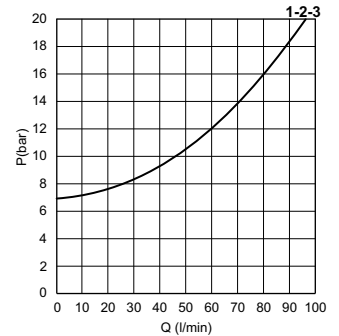


1 = CMP30.1.. - 2 = CMP30.2.. - 3 = CMP30.3..

Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

ORDERING CODE

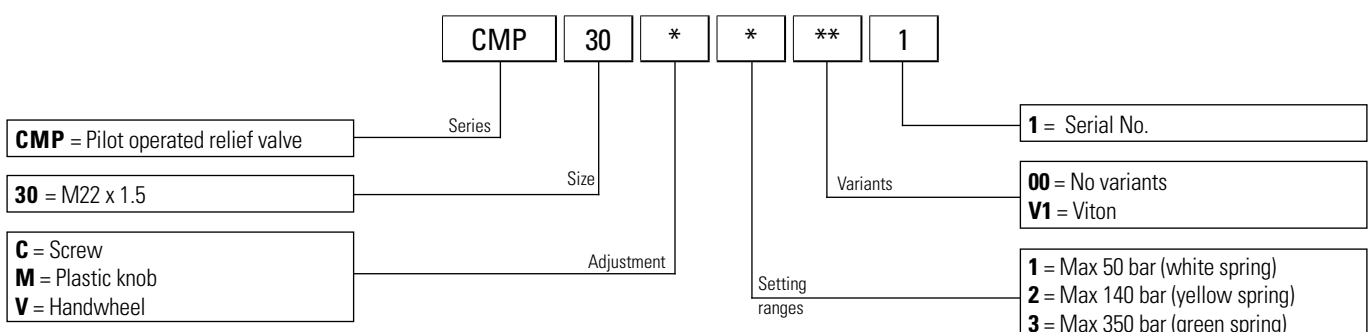

DIRECT ACTING PRESSURE RELIEF VALVES - IN-LINE MOUNTING

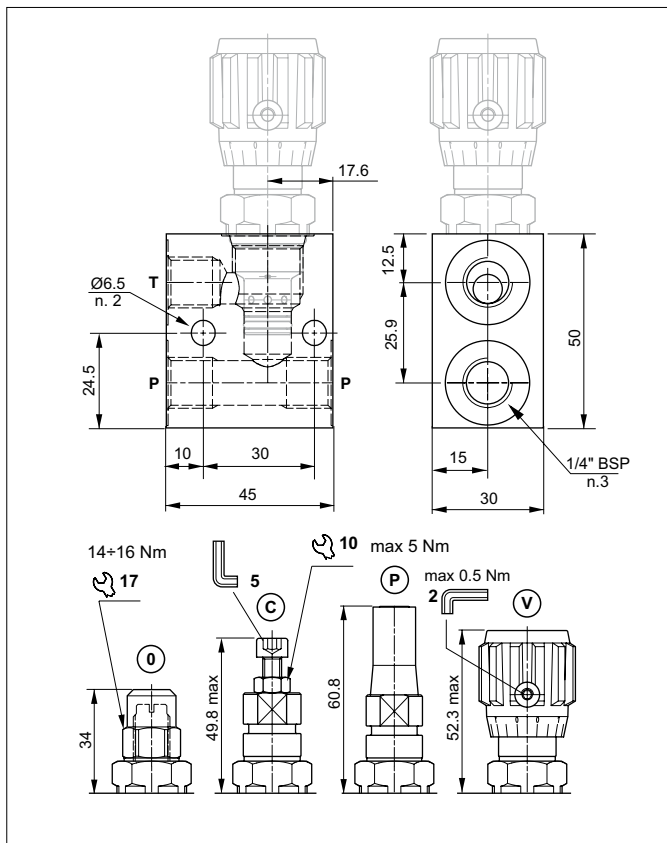


The direct acting relief valve with CMP04 cartridge limits the pressure in the hydraulic circuit
 It raises the safety level by making it impossible for the plant operators to set a higher pressure rating, than that specified in the catalogue. It has a pack spring with a mechanical stop (only standard screw and nut).
 It has a high-resistance aluminium body. The cartridge is in galvanised steel.


Max. working pressure	330 bar
Setting range:	
Spring B (white)	max 70 bar
Spring G (yellow)	max 160 bar
Spring V (green)	max 330 bar
Max. Flow	30 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight (0 version)	0.235 kg

The minimum permissible setting pressure depending on the spring: see curves below


HYDRAULIC SYMBOL



PRESSURE-FLOW RATE

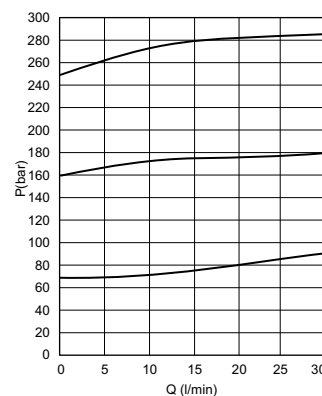


MIN. SETTING PRESSURE

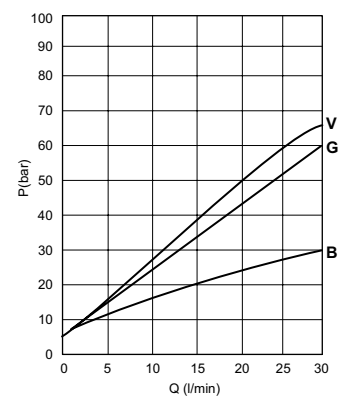


1 = VMP02*B.. - 2 = VMP02*G.. - 3 = VMP02*V..

Fluid used: mineral based oil with viscosity 32 mm²/s at 40°C.

ORDERING CODE

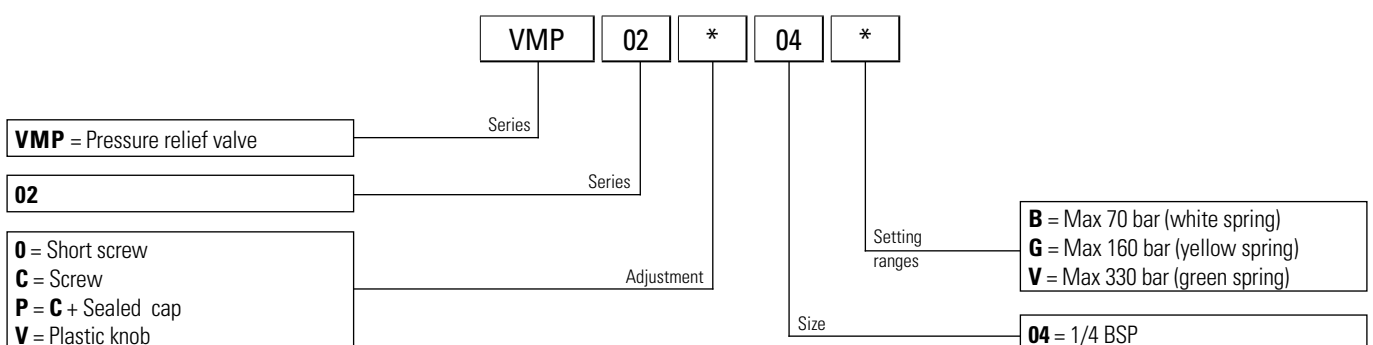

DIRECT ACTING PRESSURE RELIEF VALVES - IN-LINE MOUNTING

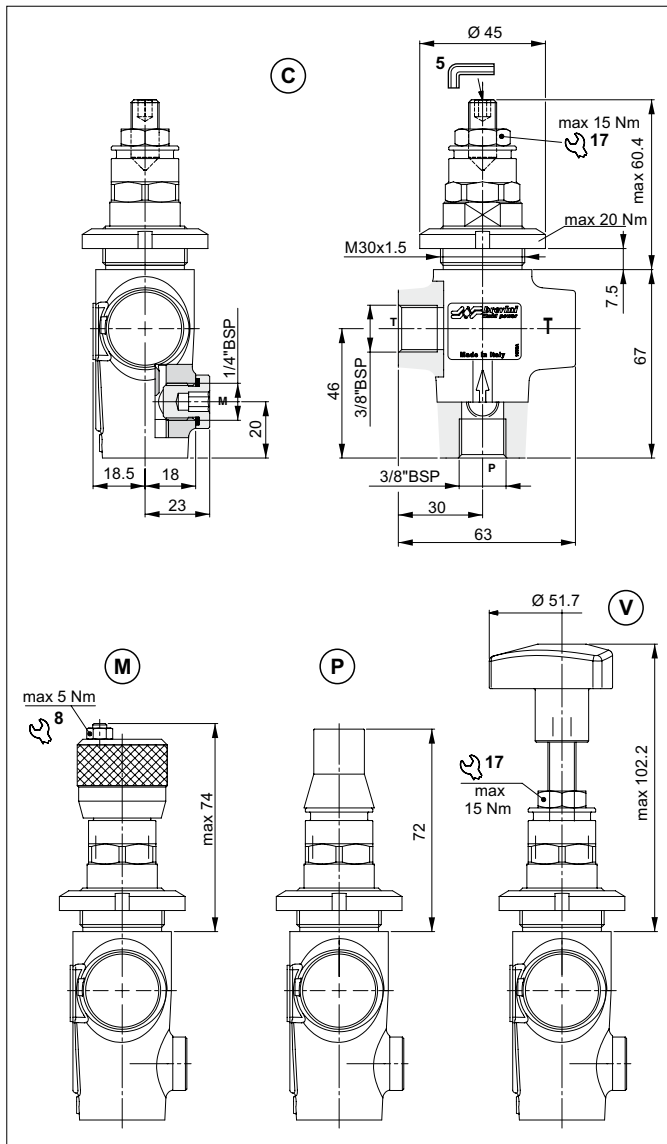

The direct acting relief valve with CP06 cartridge limits the pressure in the hydraulic circuit.

It raises the safety level by making it impossible for the plant operators to set a higher pressure rating, than that specified in the catalogue. This is limited by a pack spring with a mechanical stop.


It has a manganese phosphate coated cast iron body. The cartridge is in galvanized steel.

HYDRAULIC FEATURES


Max. working pressure	350 bar
Setting range:	
Spring 1 (orange)	max 15 bar
Spring 1 (white)	max 50 bar
Spring 2 (yellow)	max 170 bar
Spring 3 (neutral)	70 ÷ 350 bar
Max. Flow	50 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.8 kg

The minimum permissible setting pressure depending on the spring: see curves below

PRESSURE-FLOW RATE

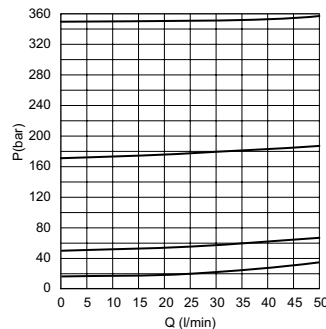


MIN. SETTING PRESSURE

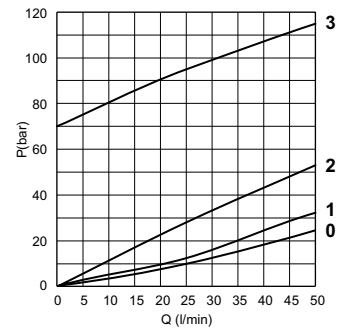

0 = VMP06.0.. - 1 = VMP06.1.. - 2 = VMP06.2.. - 3 = VMP06.3..
Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

HYDRAULIC SYMBOL



ORDERING CODE

VMP 06 * * ** 1


Series: VMP, Size: 06, Adjustment: *, Variants: **, Setting ranges: 1

VMP = Pressure relief valve
06 = Connector size: 3/8" BSP
C = Screw
M = Plastic knob
P = C + Sealed cap
V = Handwheel

1 = Serial No.
00 = No variants
V1 = Viton

0 = Max 15 bar (orange spring)
1 = Max 50 bar (white spring)
2 = Max 170 bar (yellow spring)
3 = 70÷350 bar (neutral spring)

DIRECT ACTING PRESSURE RELIEF VALVES - IN-LINE MOUNTING

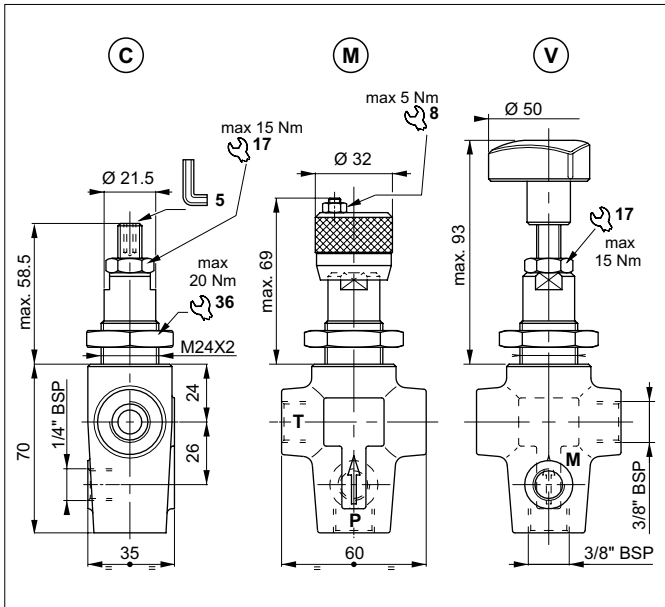

The direct acting relief valve with CMP10 cartridge limits the pressure in the hydraulic circuit.


It raises the safety level by making it impossible for the plant operators to set a higher pressure rating, than that specified in the catalogue. This is limited by a pack spring with a mechanical stop, which prevents temporary P closures caused by pressure peaks.

It has a manganese phosphate coated cast iron body. The cartridge is in galvanized steel.


HYDRAULIC FEATURES

Max. working pressure	320 bar
Setting range:	
Spring 1 (orange)	max 15 bar
Spring 1 (white)	max 50 bar
Spring 2 (yellow)	max 150 bar
Spring 3 (green)	max 320 bar
Max. Flow	40 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.8 kg


HYDRAULIC SYMBOL



PRESSURE-FLOW RATE

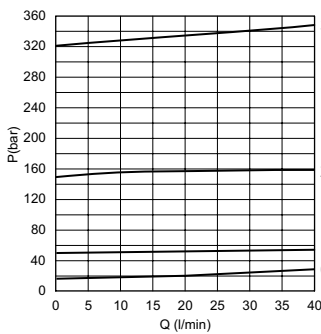

MIN.SETTING PRESSURE

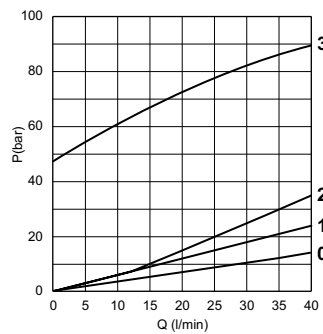


0 = VMP10.0.. - 1 = VMP10.1.. - 2 = VMP10.2.. - 3 = VMP10.3..


Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

The minimum permissible setting pressure depending on the spring: see curves.

ORDERING CODE

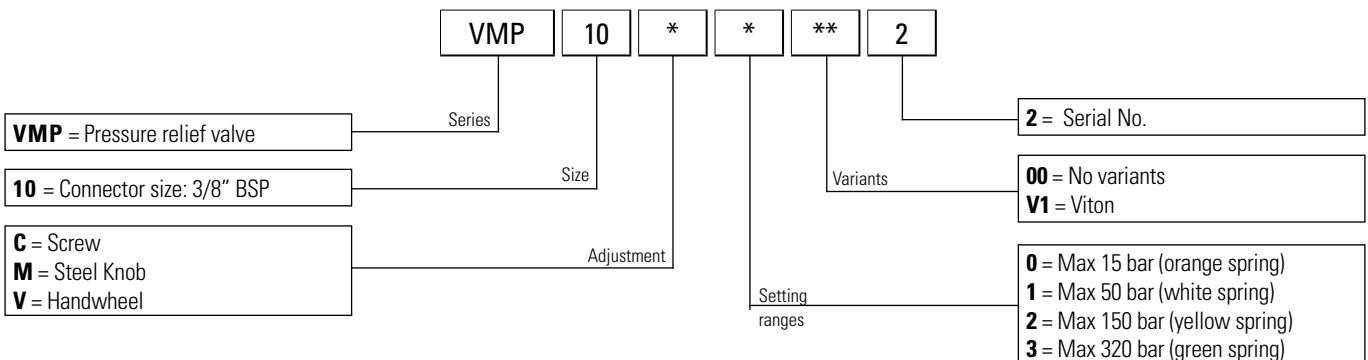


DIRECT ACTING PRESSURE RELIEF VALVES - IN-LINE MOUNTING

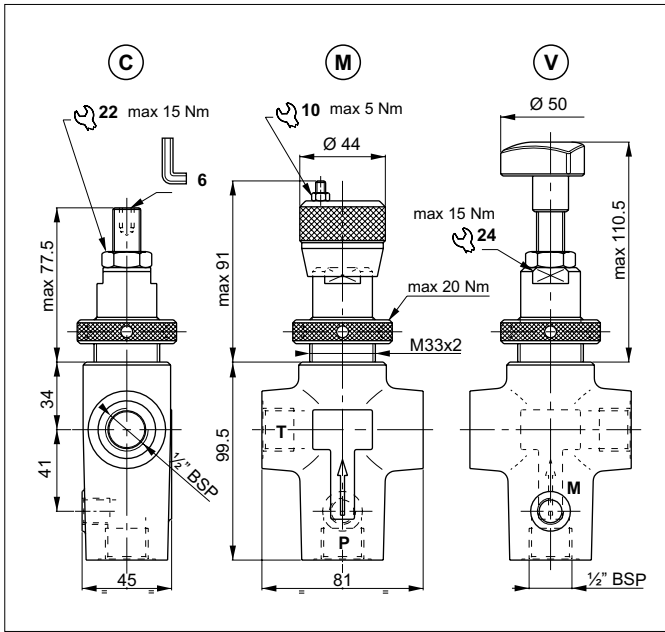

The direct acting relief valve with CMP20 cartridge limits the pressure in the hydraulic circuit to the calibration field specified in the catalogue. It has a manganese phosphate coated cast iron body. The cartridge is in galvanized steel.


HYDRAULIC SYMBOL




HYDRAULIC FEATURES

Max. working pressure	250 bar
Setting range:	
Spring 1 (white)	max 30 bar
Spring 2 (yellow)	max 140 bar
Spring 3 (green)	max 250 bar
Max. Flow	80 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	1.7 kg

PRESSURE-FLOW RATE

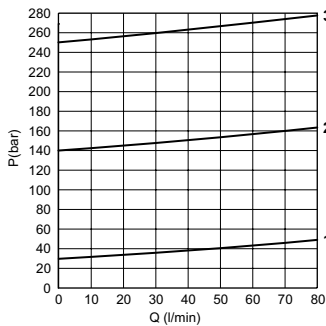

MIN.SETTING PRESSURE

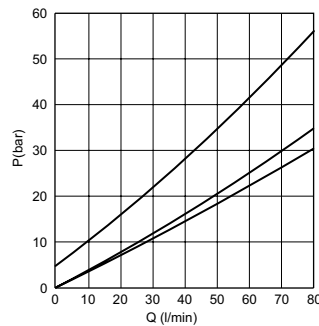


1 = VMP20.1.. - 2 = VMP20.2.. - 3 = VMP20.3..


Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

The minimum permissible setting pressure depending on the spring: see curves.

ORDERING CODE

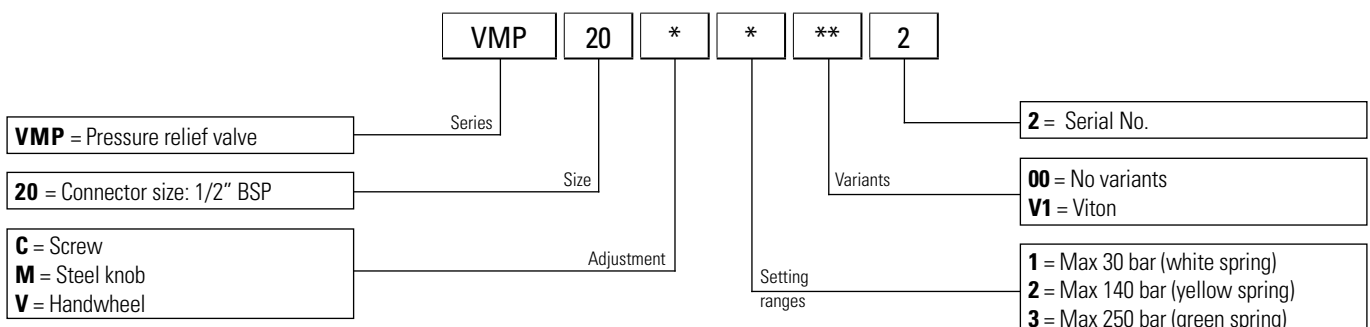

PILOT OPERATED PRESSURE RELIEF VALVES - IN-LINE MOUNTING

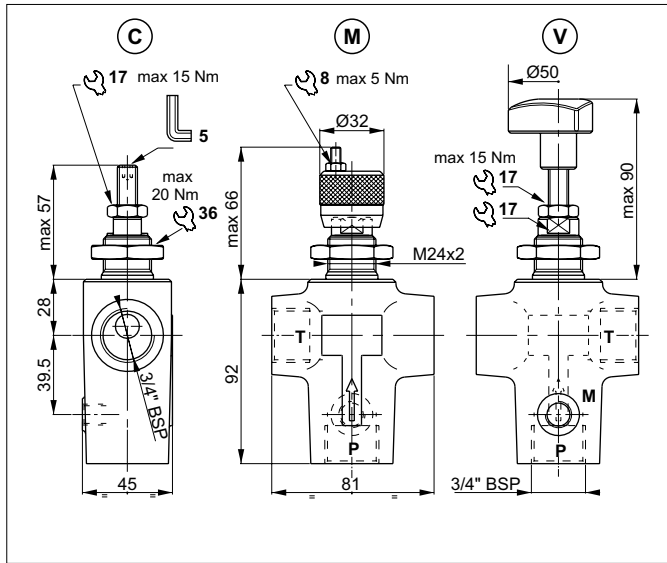


The direct acting relief valve with CMP30 cartridge limits the pressure in the hydraulic circuit.

Slight leakage is tolerated for this type of valve.

It raises the safety level by making it impossible for the plant operators to set a higher pressure rating, than that specified in the catalogue. It has a pack spring with a mechanical stop.

It has a manganese phosphate coated cast iron body. The cartridge is in galvanized steel.


HYDRAULIC SYMBOL




HYDRAULIC FEATURES

Max. working pressure	350 bar
Setting range:	
Spring 1 (white)	max 50 bar
Spring 2 (yellow)	max 140 bar
Spring 3 (green)	max 350 bar
Max. Flow	100 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	1.4 kg

PRESSURE-FLOW RATE

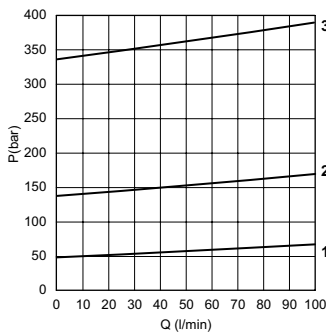

MIN.SETTING PRESSURE

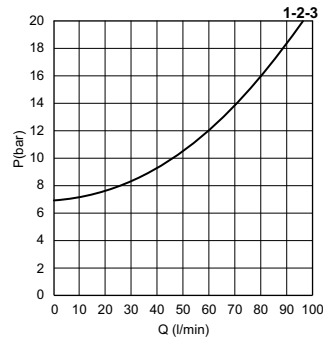


1 = VMP30.1.. - 2 = VMP30.2.. - 3 = VMP30.3..


Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

The minimum permissible setting pressure depending on the spring: see curves.

ORDERING CODE

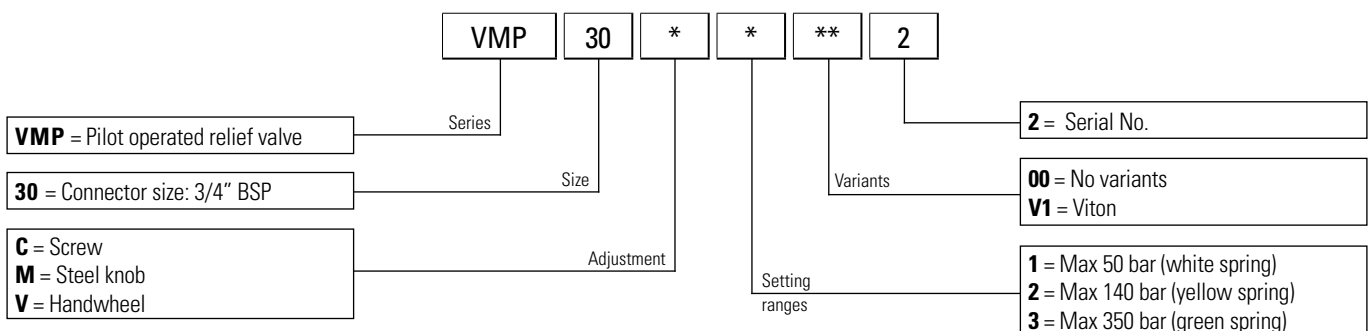


PILOT OPERATED PRESSURE RELIEF VALVES - IN-LINE MOUNTING

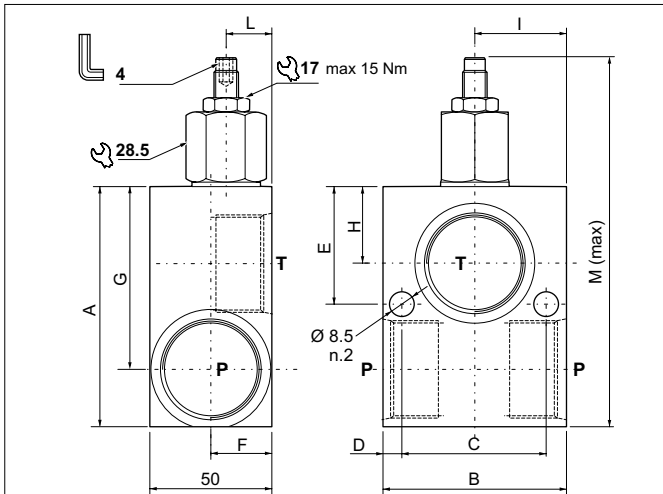

CODE	P - T Attacchi/Ports	A	B	C	D	E	F	G	H	I	L	M
VMP12012	3/4" BSP	92	50	38	6	12.5	31	71.5	35	25	31	145.4
VMP12016	1" BSP	100	77	60	8.5	19	25	76	32	38	17	154

The pilot-operated relief valve limits the pressure in the hydraulic circuit. Slight leakage is tolerated for this type of valve. It raises the safety level by making it impossible for the plant operators to set a higher pressure rating, than that specified in the catalogue. It has a pack spring with a mechanical stop. It has a high-resistance aluminium body. The cartridge is in galvanised steel.


HYDRAULIC SYMBOL

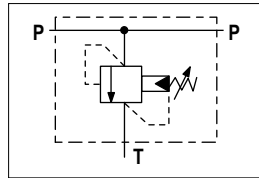

HYDRAULIC FEATURES


Max. working pressure	350 bar
Max. Flow	150 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.65 kg (3/4 BSP) 0.91 kg (1 BSP)
Cavity	(1" - 14 UNS) - Ø 19.05 mm

PRESSURE-FLOW RATE


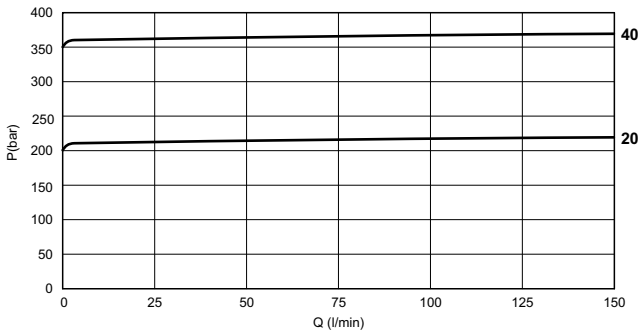


Fluid used: mineral based oil with viscosity 24 mm²/s at 50°C.


ORDERING CODE

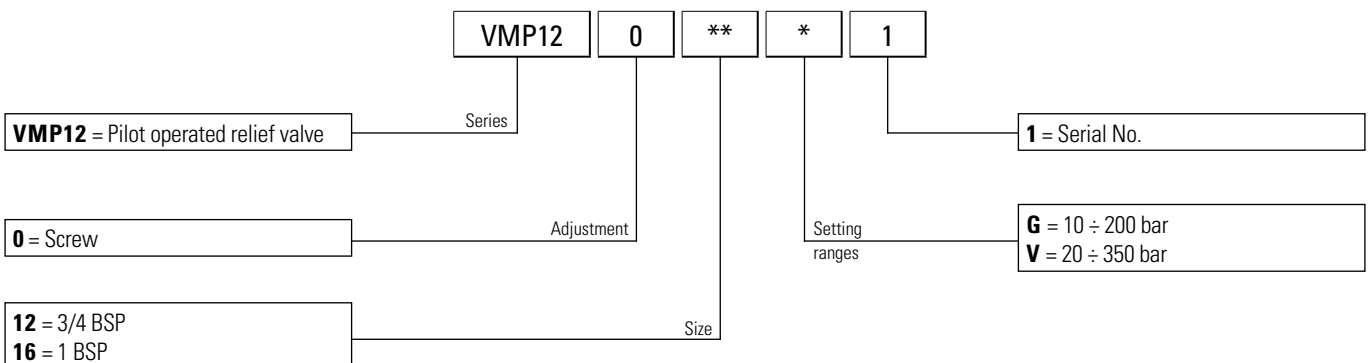

SEQUENCE, PRESSURE REDUCING AND UNLOADING VALVES

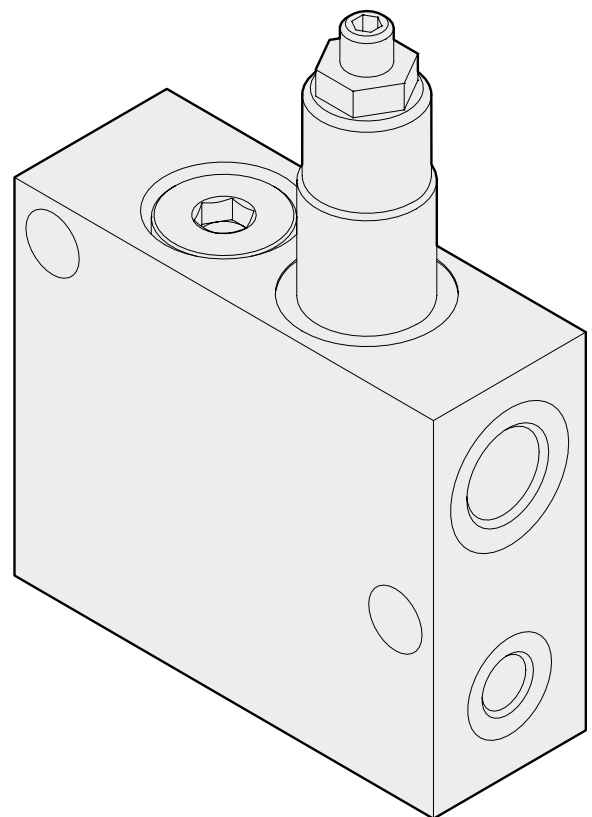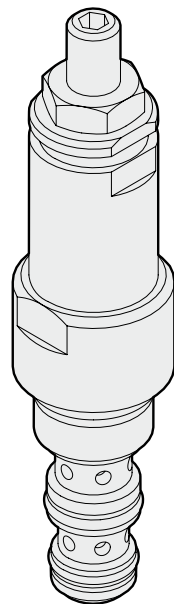


SEQUENCE VALVES - DIRECTLY OPERATED

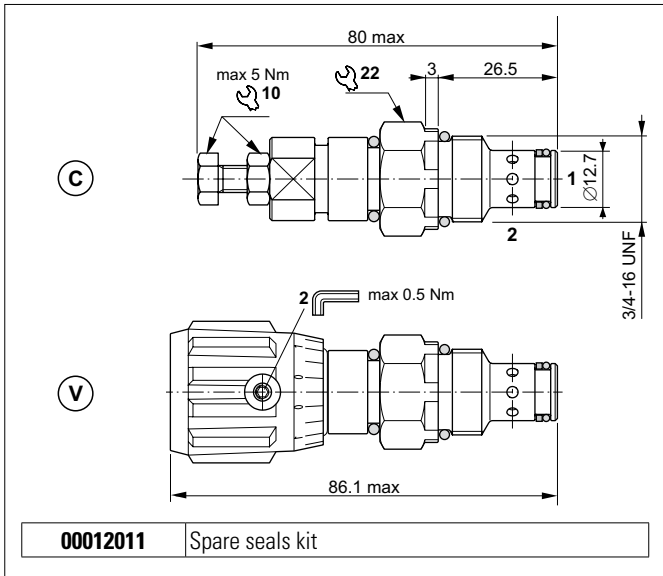

The direct acting sequence valve feeds a secondary branch of a circuit when a set pressure value is reached and suppresses the primary pressure. It raises the safety level by making it impossible for the plant operators to set a higher pressure rating, than that specified in the catalogue. It has a pack spring with a mechanical stop (only standard screw and nut). It has a galvanised steel body. The guided ball poppet is in tempered and ground steel.


HYDRAULIC SYMBOL




HYDRAULIC FEATURES

Max. working pressure	350 bar
Setting range:	
Spring 1 (white)	max 70 bar
Spring 2 (yellow)	max 180 bar
Spring 3 (green)	max 340 bar
Max. Flow	30 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	CSQ04C: 0.115 kg CSQ04V: 0.150 kg
Tightening torque	25 ÷ 30 Nm
Cavity (3/4 - 16 UNF)	CD018006 (See section 15)

PRESSURE-FLOW RATE

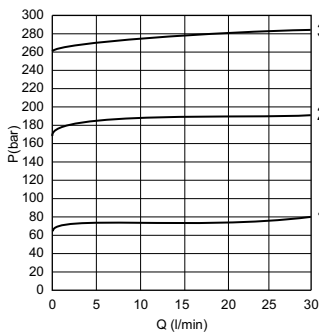

MIN.SETTING PRESSURE

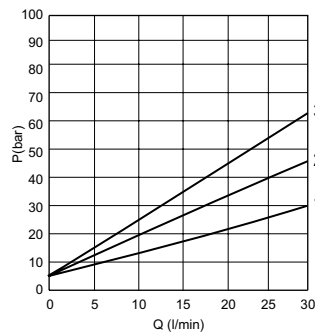


1 = CSQ04.1.. - 2 = CSQ04.2.. - 3 = CSQ04.3..


Fluid used: mineral based oil with viscosity 32 mm²/s at 40°C.

The minimum permissible setting pressure depending on the spring: see curves below

ORDERING CODE

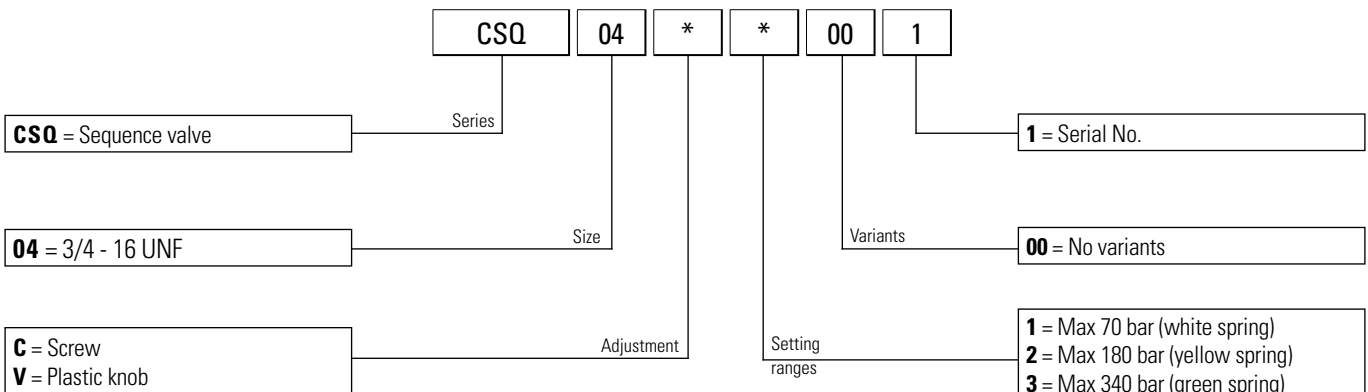

SEQUENCE VALVES - DIRECTLY OPERATED (FOR MK3 SERIES POWER PACKS)

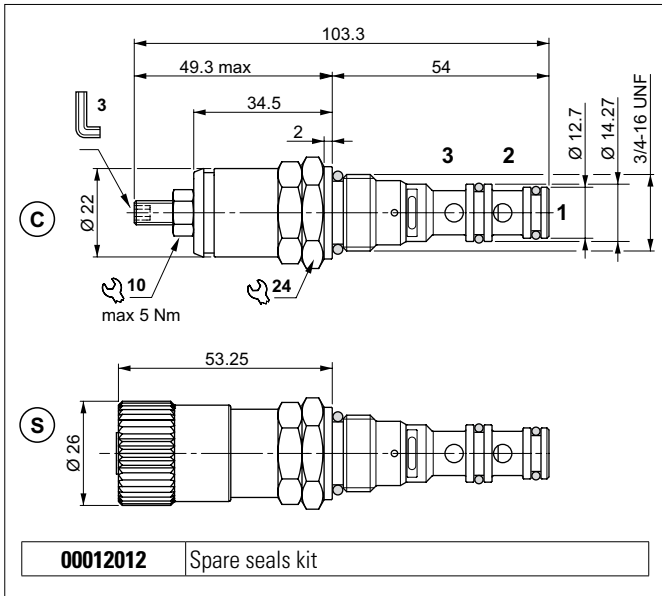


3 way direct acting sequence valve feeds with 1 → 2 flow, a secondary branch of a circuit when a set pressure value is reached. While the port 3 is normally connected to tank. When the port 1 is at a lower pressure than the setting pressure, the ports 2 and 3 are connected to tank. Back pressure on port 3 adds to the valve setting. Back pressure on port 2 does not effect the valve setting when there is flow from port 1 to 2. It raises the safety level by making it impossible for the plant operators to set a higher pressure rating, than that specified in the catalogue. It has a pack spring with a mechanical stop (only standard screw and nut). The body is made of steel with nitrocarburizing treatment while the spool is made of tempered and ground steel.

HYDRAULIC FEATURES


Max. pressure	210 bar
Setting range:	
Spring 1 (neutral)	max 125 bar
Spring 2 (red)	max 175 bar
Max. Flow	10 l/min
Leakage at 70% of the spring calibration (flow 1 l/min)	
Spring 1: 0 ÷ 30 drops/min	Spring 1: 0 ÷ 1.5 cm ³ /min
Spring 2: 0 ÷ 60 drops/min	Spring 2: 0 ÷ 3 cm ³ /min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	CSMK04C.. : 0.145 kg CSMK04S.. : 0.152 kg
Tightening torque	25 ÷ 30 Nm
Cavity (3/4 - 16 UNF)	CDD18001 (See section 15)

The minimum permissible setting pressure depending on the spring: see curves.


HYDRAULIC SYMBOL




PRESSURE-FLOW RATE (1 → 2)

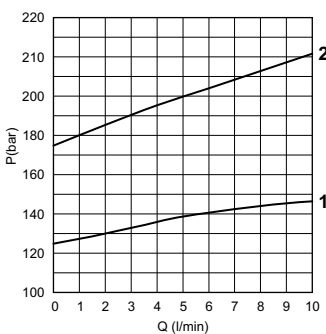

MIN. SETTING PRESSURE (1 → 2)

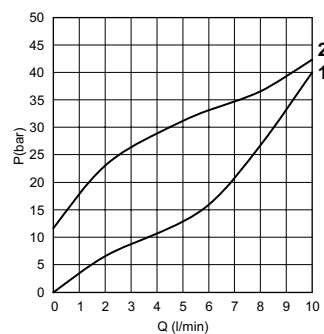


PRESSURE DROPS (2 → 3)

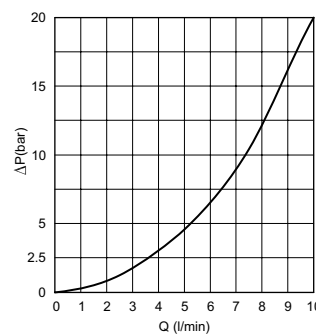


1 = CSMK04.1.
2 = CSMK04.2.

Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

ORDERING CODE

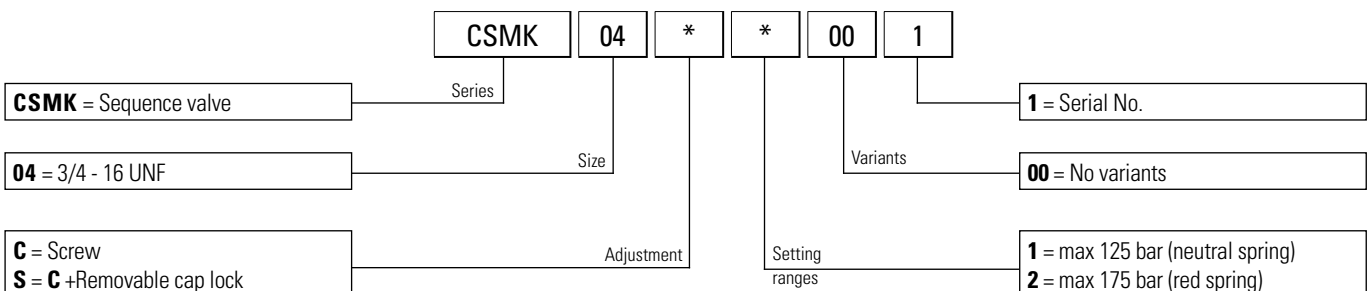

SEQUENCE VALVES - PILOT OPERATED

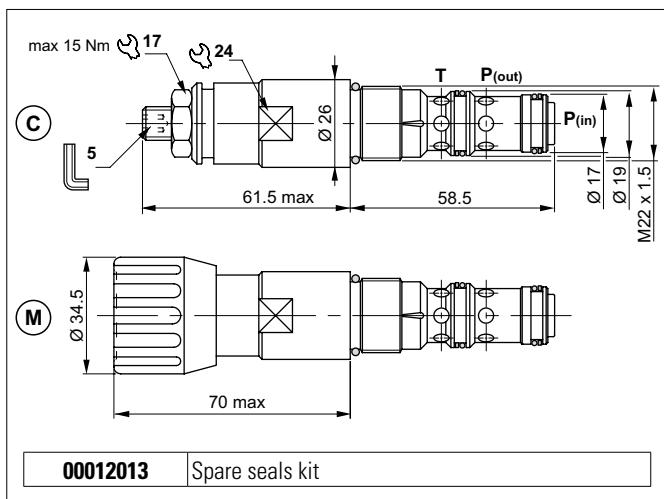


The pilot-operated sequence valve feeds a secondary branch of a circuit when a set pressure value is reached, guaranteeing minimum variation of the set pressure with flow alterations of up to 90 l/min. Slight leakage is tolerated for this type of valve. It raises the safety level by making it impossible for the plant operators to set a higher pressure rating, than that specified in the catalogue. It has a pack spring with a mechanical stop. It has a galvanised steel body. The guided ball pilot poppet and cylindrical main plunger are made from tempered and ground steel.


HYDRAULIC FEATURES

Max. pressure	350 bar
Setting range:	
Spring 1 (white)	max 60 bar
Spring 2 (yellow)	max 120 bar
Spring 3 (green)	max 250 bar
Max. Flow	90 l/min
Max. draining on port T	0.5 ÷ 0.7 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.25 kg
Tightening torque	30 ÷ 40 Nm
Cavity (M22 x 1.5)	CN047002 (See section 15)


HYDRAULIC SYMBOL



MIN.SETTING PRESSURE

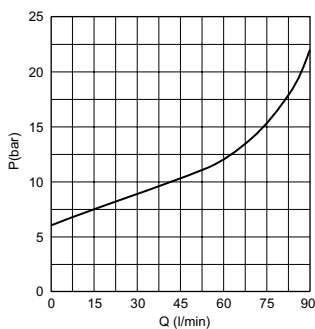

PRESSURE-FLOW RATE

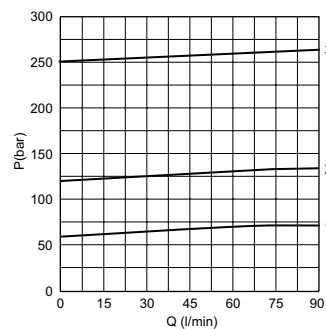


1 = CVS20.1.. - 2 = CVS20.2.. - 3 = CVS20.3..


Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

The minimum permissible setting pressure depending on the spring: see curves.

ORDERING CODE

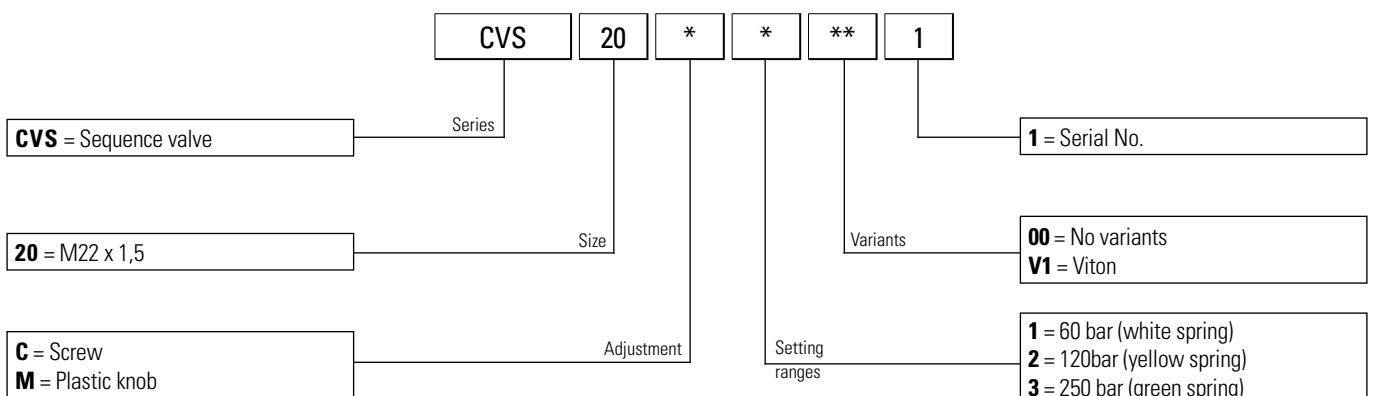

PRESSURE REDUCING VALVES WITH RELIEVING - DIRECT OPERATED

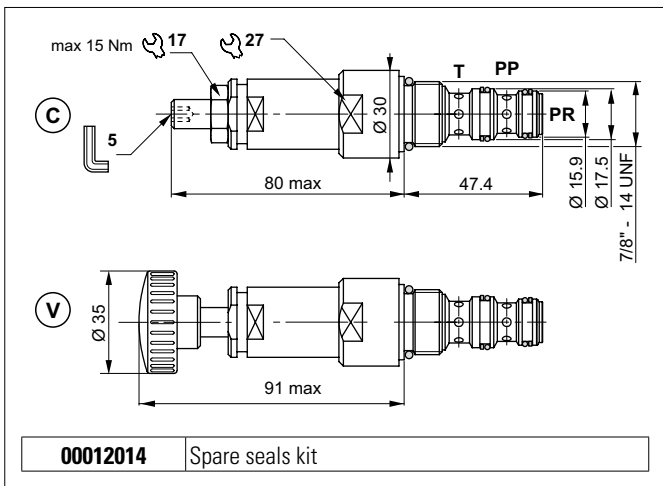


The direct acting pressure reducing valve feeds a secondary branch of a circuit at a lower pressure than the main branch, guaranteeing minimum variation of the set pressure with flow alterations of up to 20 l/min. Slight leakage is tolerated for this type of valve. It raises the safety level with the RELIEVING system that enables fluid to pass through the valve from PR to T, preventing pressure increases in the controlled branch and protecting the load, and by making it impossible for plant operators to set a higher pressure rating than that specified in the catalogue. It has a pack spring with mechanical stop. It has a galvanised steel body. The plunger is in tempered and ground steel.

HYDRAULIC FEATURES


Max. pressure	320 bar
Setting range:	
Spring 1 (white)	max 2 ÷ 30 bar
Spring 2 (yellow)	max 6 ÷ 70 bar
Spring 3 (green)	max 35 ÷ 130 bar
Spring 4 (blue)	max 65 ÷ 230 bar
Max. Flow	20 l/min
Max. draining on port T	0.2 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.3 kg
Tightening torque	35 ÷ 40 Nm
Cavity (7/8 - 14 UNF)	CD019006 (See section 15)

HYDRAULIC SYMBOL

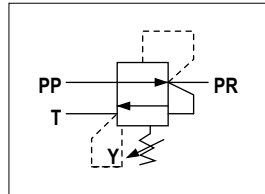


The minimum permissible setting pressure depending on the spring: see curves.


PRESSURE-FLOW OF RELIEVING

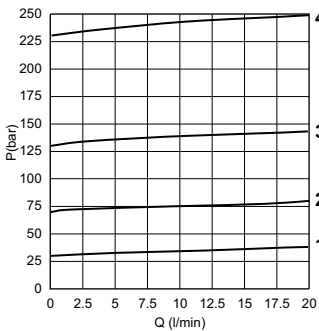

MIN.SETTING PRESSURE

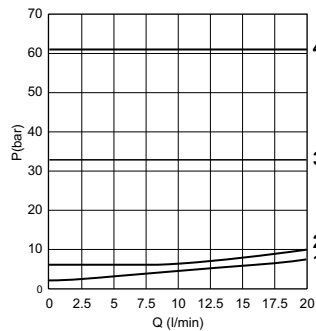


PRESSURE-FLOW RATE

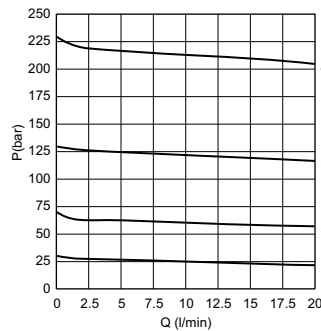


1 = CVR06.1..
 2 = CVR06.2..
 3 = CVR06.3..
 4 = CVR06.4..
 Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

ORDERING CODE

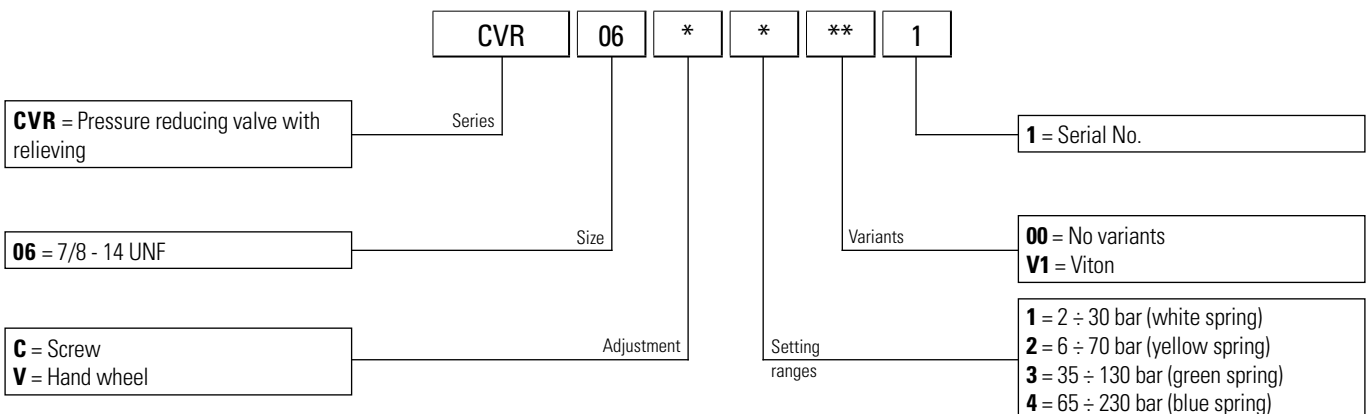

PRESSURE REDUCING VALVES WITH RELIEVING - PILOT OPERATED

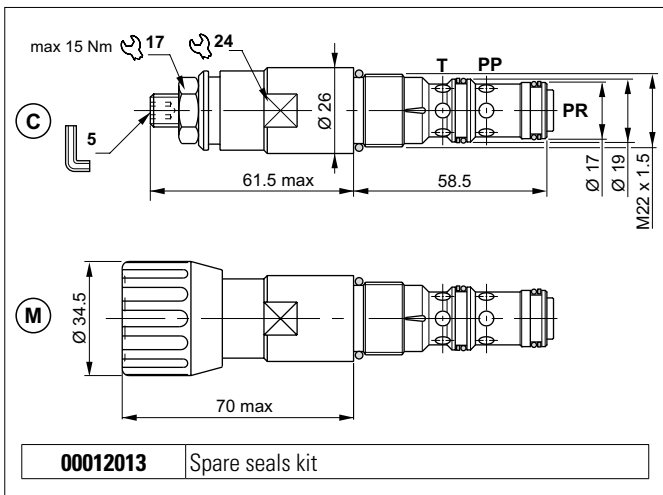

The pilot-operated pressure reducing valve feeds a secondary branch of a circuit at a lower pressure, guaranteeing minimum variation of the set pressure with flow alterations of up to 90 l/min.


Slight leakage is tolerated for this type of valve.

It raises the safety level with the RELIEVING system that enables fluid to pass through the valve from PR to T, preventing pressure increases in the controlled branch and protecting the load, and by making it impossible for plant operators to set a higher pressure rating than that specified in the catalogue. It has a pack spring with mechanical stop. It has a galvanised steel body. The plunger is in tempered and ground steel.


HYDRAULIC FEATURES

Max. pressure	350 bar
Setting range:	
Spring 1 (white)	max 60 bar
Spring 2 (yellow)	max 120 bar
Spring 3 (green)	max 250 bar
Maximum allowed Δp pressure between the inlet and outlet pressure	150 bar
Max. Flow	90 l/min
Max. draining on port T	0.5 ÷ 0.7 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.25 kg
Tightening torque	30 ÷ 40 Nm
Cavity (M22 x 1.5)	CN047002 (See section 15)


HYDRAULIC SYMBOL

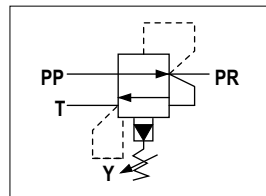


PRESSURE-FLOW OF RELIEVING

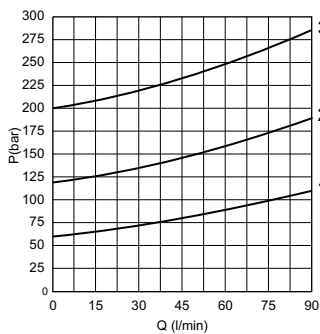

MIN. SETTING PRESSURE

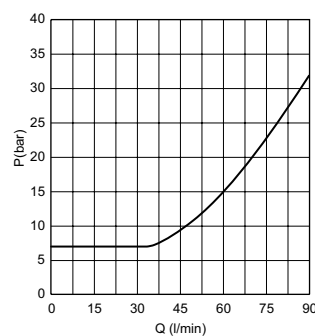


PRESSURE-FLOW RATE

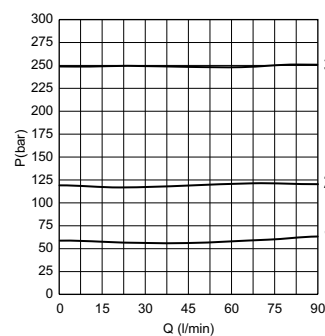


1 = CVR20.1..
2 = CVR20.2..
3 = CVR20.3..
Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

The minimum permissible setting pressure depending on the spring: see curves.

ORDERING CODE

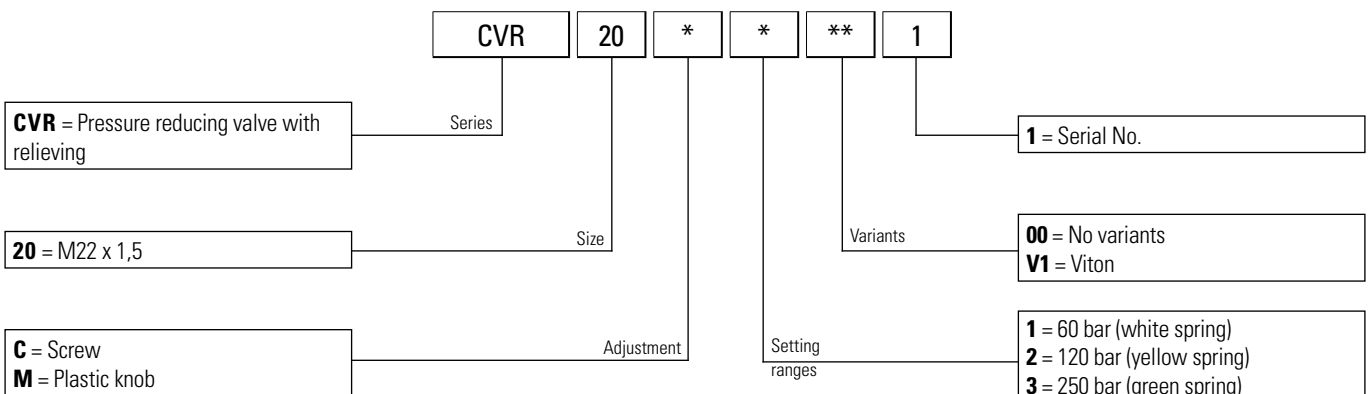

SEQUENCE VALVES

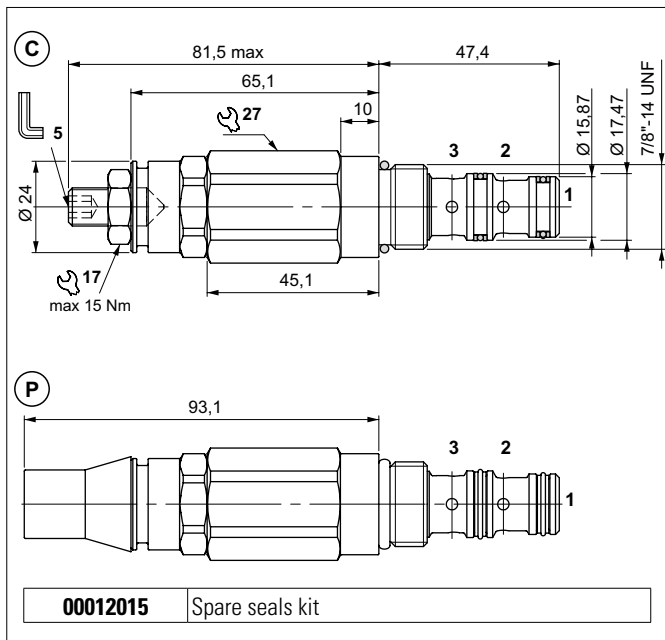


The 3-way sequence valve connects a pressurised branch to drain line when the pilot branch calibration setting is reached (port 1). Slight leakage is tolerated for this type of valve. It has a galvanised steel body. The plunger is in tempered and ground steel.


HYDRAULIC FEATURES

Max. pressure	400 bar
Max. Flow	30 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.3 kg
Tightening torque	30 ÷ 40 Nm
Cavity (7/8 - 14 UNF)	CD019006 (See section 15)

HYDRAULIC SYMBOL

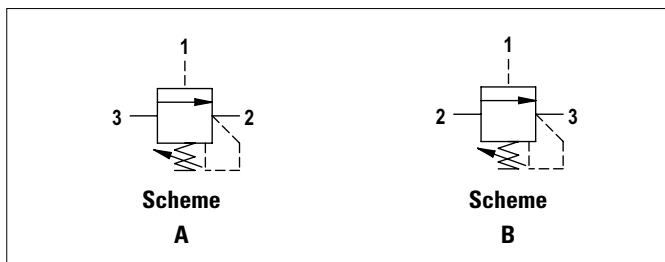


PRESSURE DROPS

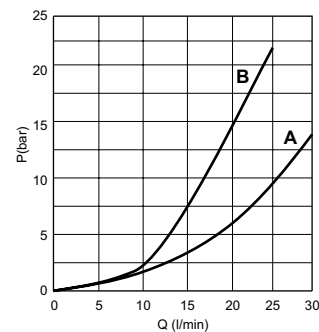


Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

Spool scheme	Connections	Flow max l/min
A	3 → 2	30
B	2 → 3	25

ORDERING CODE

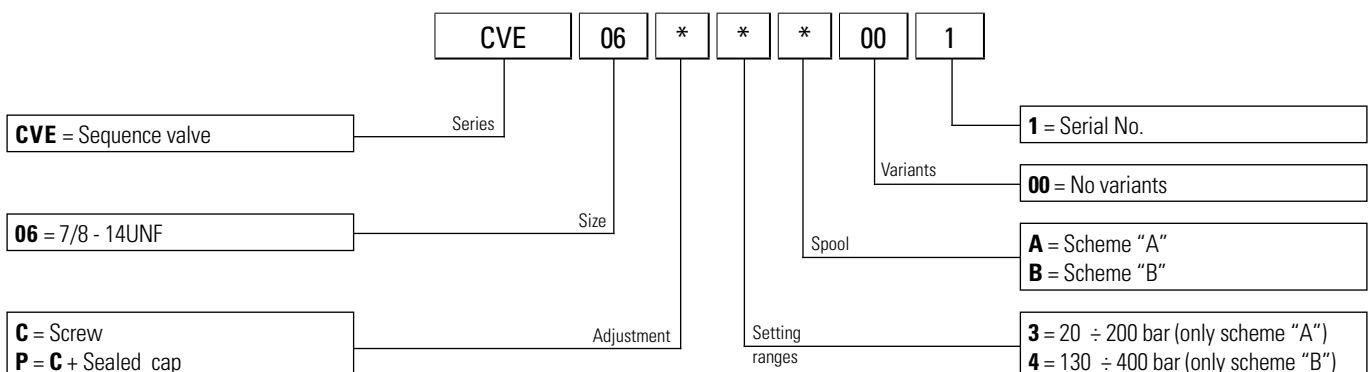

PRESSURE REDUCING AND SEQUENCE VALVES - IN-LINE MOUNTING

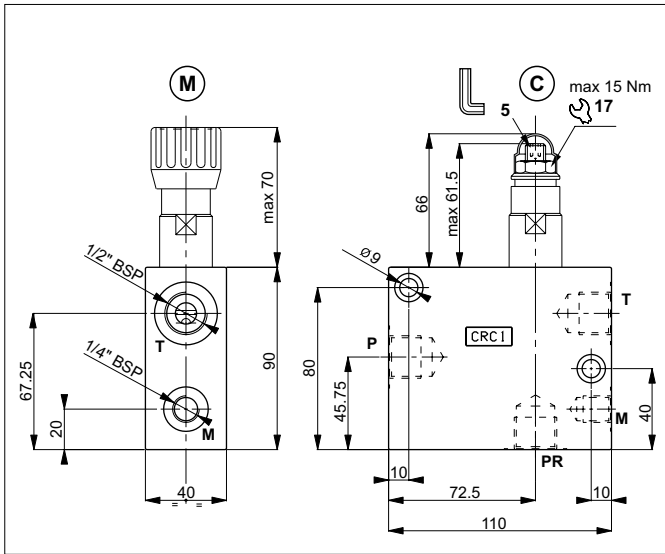


The CRC.1 aluminium body allows the in-line mounting connections for CVS.20 sequence and CVR.20 pressure reducing valves. In the version with pressure reducing valve the pump supply is connected to the port P, while in the version sequence valve is connected to the mouth PR.

For pressure reducing version the body is provided with a one-way check valve, which allows free flow to opposite direction (PR toward P)


For the sequence version a blind grub screw has been placed instead of a check valve.

- Mounting the blind grub screw , code **M78100013**, it is possible to transform the body from reducing valve to sequence valve.
- Mounting the blind grub screw , code **V70052204**, it is possible to transform the body from sequence valve to reducing valve.

HYDRAULIC SYMBOLS

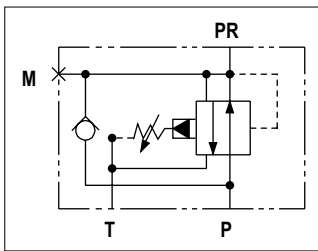

Reducing valve version

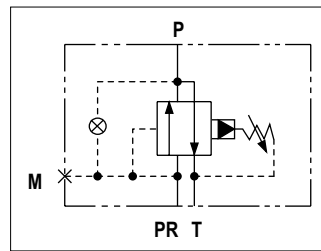


Sequence valve version

HYDRAULIC FEATURES

Max. pressure	350 bar
Setting range:	
Spring 1 (white)	max 60 bar
Spring 2 (yellow)	max 120 bar
Spring 3 (green)	max 250 bar
Max. Flow	90 l/min
Max. draining on port T	0.5 ÷ 0.7 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	1.224 kg

FREE FLOW THROUGH THE CHECK VALVE

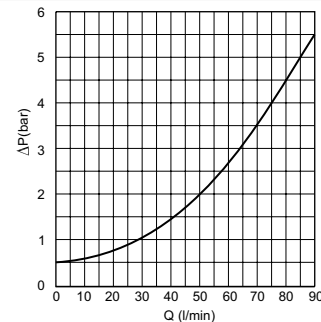


Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.


ORDERING CODE

CRC	1	*	*	*	**	1
Series	Size	Adjustment			Setting ranges	Variants
CRC = Sequence and pressure reducing cartridge valve Size 20 (seat M22x1,5)	1 = Size connection 1/2" BSP				1 = Serial No.	
R = Pressure reducing cartridge valve S = Sequence cartridge valve					00 = No variants V1 = Viton	
M = Plastic knob C = Screw 0 = Without cartridge valve					1 = 60 bar (white spring) 2 = 120bar (yellow spring) 3 = 250 bar (green spring) 0 = Without cartridge valve	

DOUBLE CROSS RELIEF VALVES

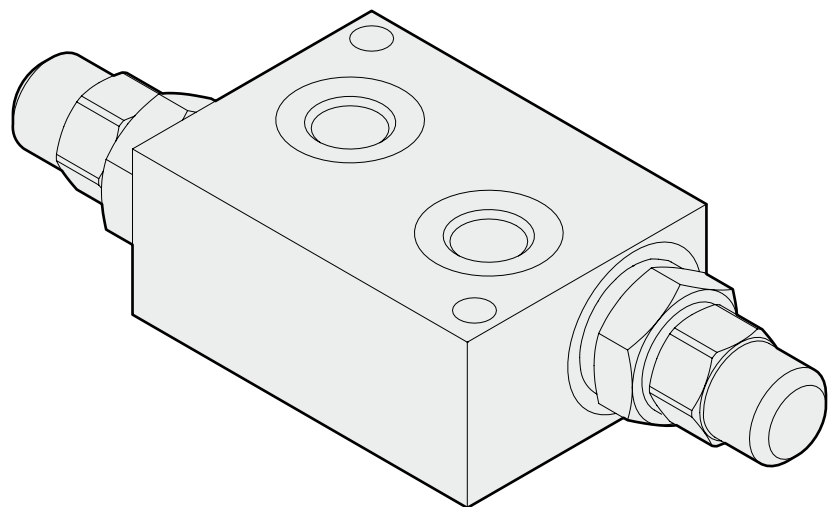


DOUBLE CROSS RELIEF VALVES DIRECT ACTING - IN-LINE MOUNTING

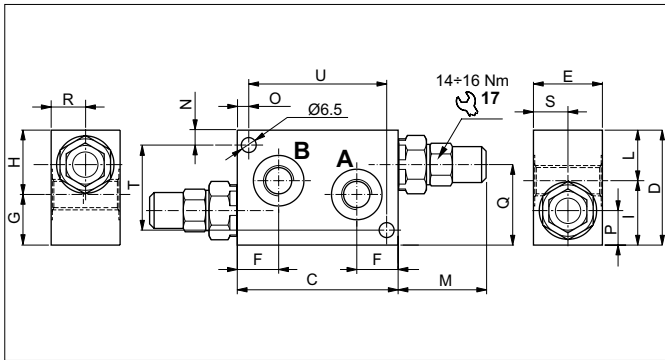

The direct acting compensator valves with CMP04 type cartridge protects the hydraulic components from impact or peaks in pressure. It raises the safety level by making it impossible for the plant operators to set a higher pressure rating, than that specified in the catalogue. It has a pack spring with a mechanical stop (only standard screw and nut). The body is in high-resistance aluminium and the cartridge is in galvanised steel.

HYDRAULIC SYMBOL

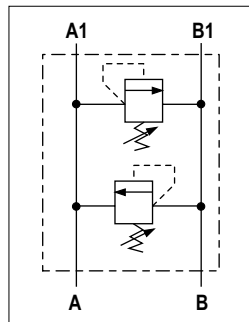


HYDRAULIC FEATURES


Max. pressure	
Size 1/4 BSP	250 bar
Size 3/8 BSP	250 bar
Max. Flow	
Size 1/4 BSP	30 l/min
Size 3/8 BSP	30 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14

Size	Ports A-B	Valve features see:	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	L (mm)	M (mm)	N (mm)	O (mm)	P (mm)	Q (mm)	R (mm)	S (mm)	T (mm)	U (mm)	Weight (kg)
04	1/4 BSP	CMP04	70	50	30	17.5	22	28	28	22	32	6.5	5	15	35	15	15	37	60	0.394
06	3/8 BSP	CMP04	70	50	30	18	20	30	30	20	32	6.5	5	15	35	15	15	37	60	0.400


ORDERING CODE

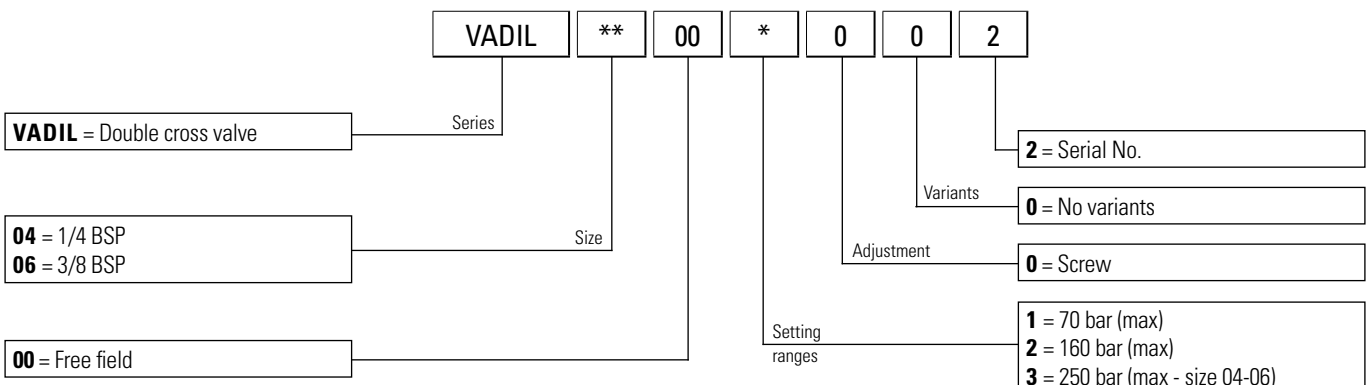

ONE-WAY CHECK VALVES

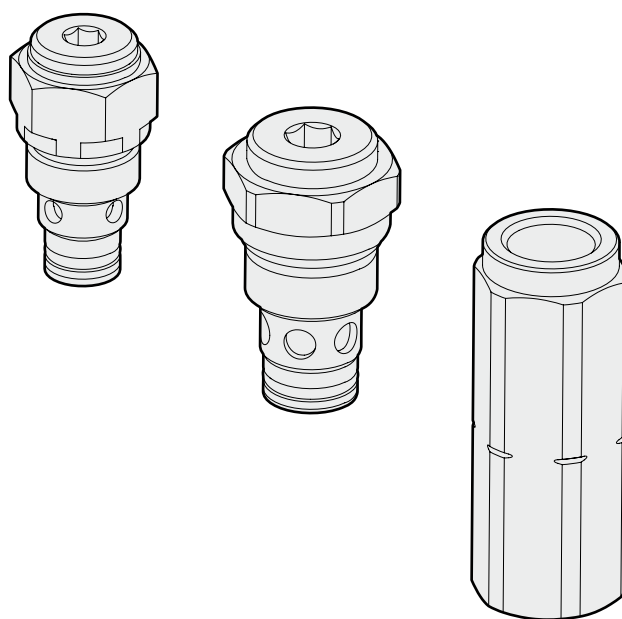

ONE-WAY CHECK VALVES

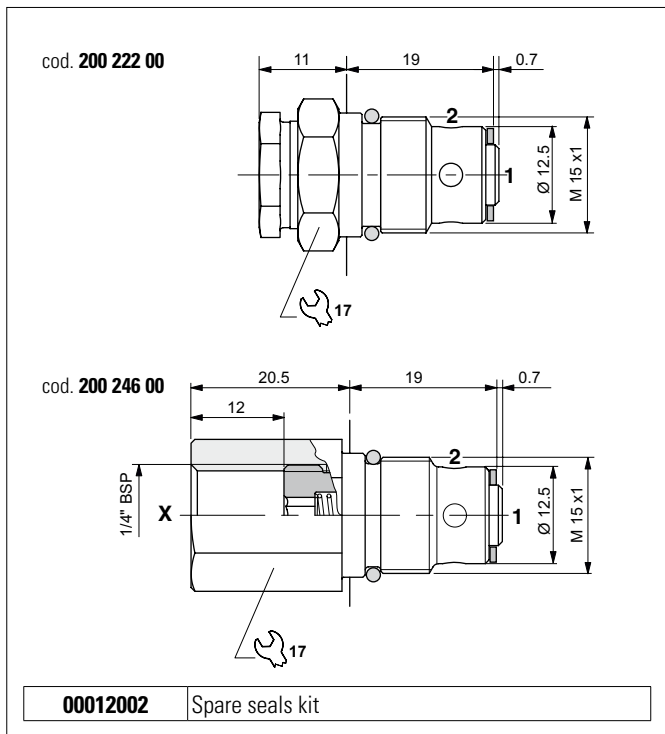


The unidirectional check valve allows oil to flow in only one direction. The guided ball seal is made of tempered and ground steel. The spring allows the valve to be mounted in any position. Also available with 1/4" BSP auxiliary pressure outlet. It has a galvanised steel body.


HYDRAULIC FEATURES

Max. working pressure	220 bar
Max. Flow	10 l/min
Max. Leakage (0 ÷ 5 drops/min)	0 ÷ 0.25 cm ³ /min
Crack pressure	1 bar
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Tightening torque	16 ÷ 19 Nm
Cavity (M15x1)	CN033001 (See section 15)

HYDRAULIC SYMBOLS



cod. 20022200




cod. 20024600

ORDERING CODE


Code	Type	Weight
20022200	2 way	0.035 kg
20024600	3 way	0.042 kg

PRESSURE DROPS

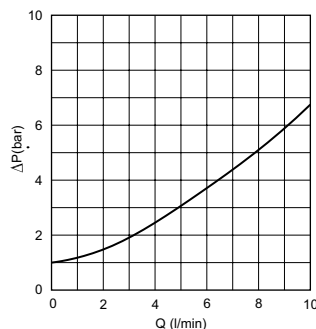

Fluid used: mineral based oil with viscosity 32 mm²/s at 50°C.

ONE-WAY CHECK VALVES

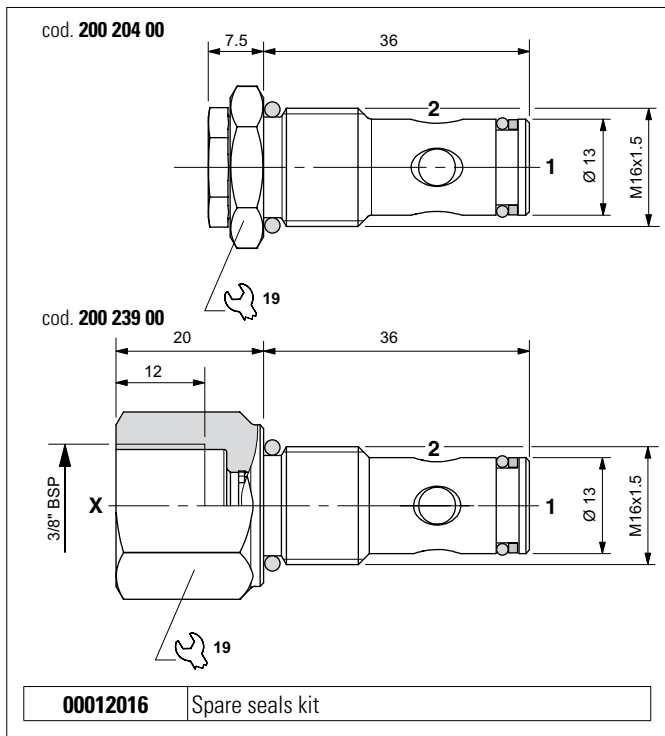


The unidirectional check valve allows oil to flow in only one direction. The guided ball seal is made of tempered and ground steel. The spring allows the valve to be mounted in any position. Also available with 1/4" BSP auxiliary pressure outlet. It has a galvanised steel body.


HYDRAULIC FEATURES

Max. working pressure	210 bar
Max. Flow	20 l/min
Max. Leakage (0 ÷ 5 drops/min)	0 ÷ 0.25 cm ³ /min
Crack pressure	0.5 bar
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Tightening torque	28 ÷ 32 Nm
Cavity (M16x1.5)	CN03704 (See section 15)

HYDRAULIC SYMBOLS



cod. 20020400




cod. 20023900

ORDERING CODE


Code	Type	Weight
20020400	2 way	0.041 kg
20023900	3 way	0.070 kg

PRESSURE DROPS

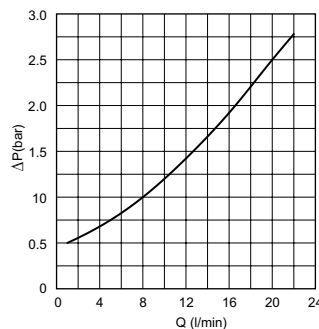

Fluid used: mineral based oil with viscosity 32 mm²/s at 50°C.

ONE-WAY CHECK VALVES

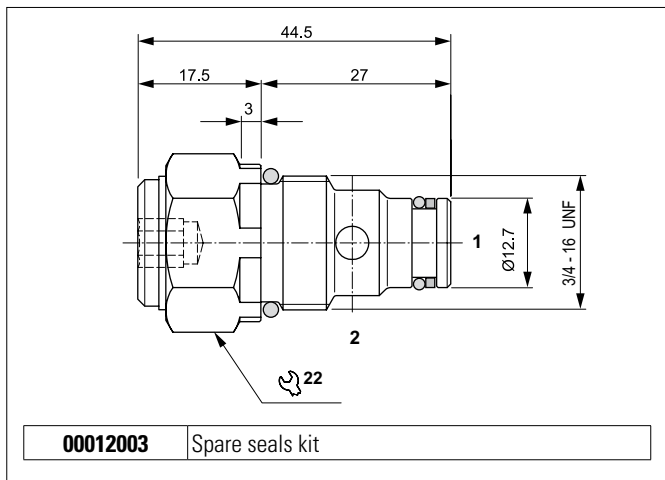


00012003 Spare seals kit

The check-valves permit one-directional oil flow only. On the opposite side the sealing is guaranteed by a hardened and ground taper steel poppet. The spring permits an easy valve installation in any position. External steel body protected on surface by zinc plating.


HYDRAULIC FEATURES

Max. working pressure	350 bar
Max. Flow	40 l/min
Max. Leakage (0 ÷ 5 drops/min)	0 ÷ 0.25 cm ³ /min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.08 kg
Tightening torque	25 ÷ 30 Nm
Cavity (3/4 - 16 UNF)	CD018006 (See section 15)

HYDRAULIC SYMBOL




PILOT SPOOL

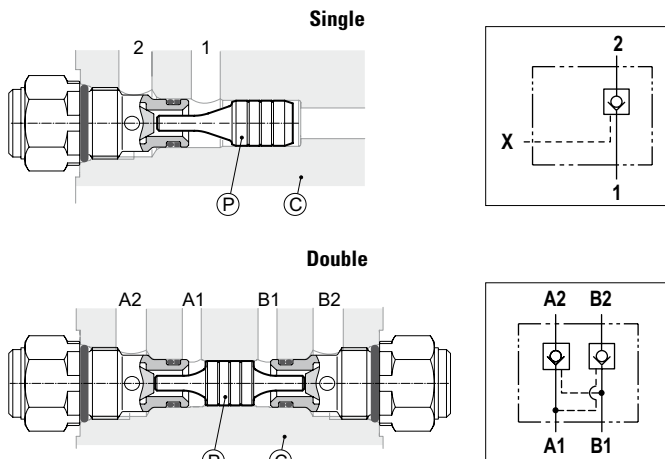


Type	Spool (P) code	Cavity (C) (See section 15)	Pilot ratio
Single	F63400002	CD018015	1 : 2.9
Double	F63400003	CD018016	1 : 2.9

PRESSURE DROPS

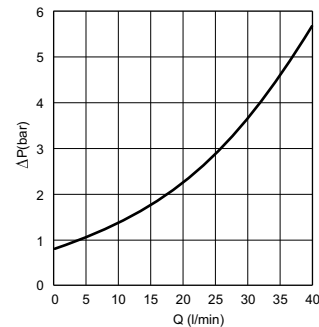


Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

ORDERING CODE

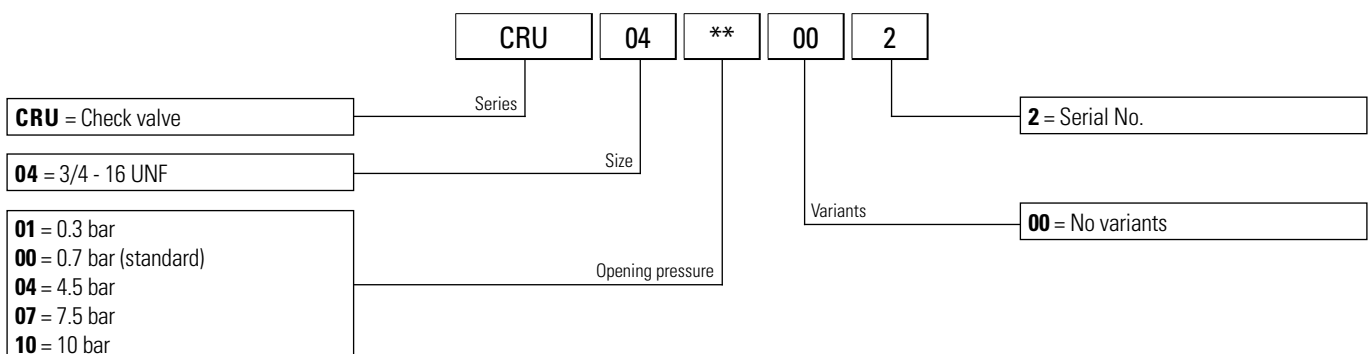

ONE-WAY CHECK VALVES

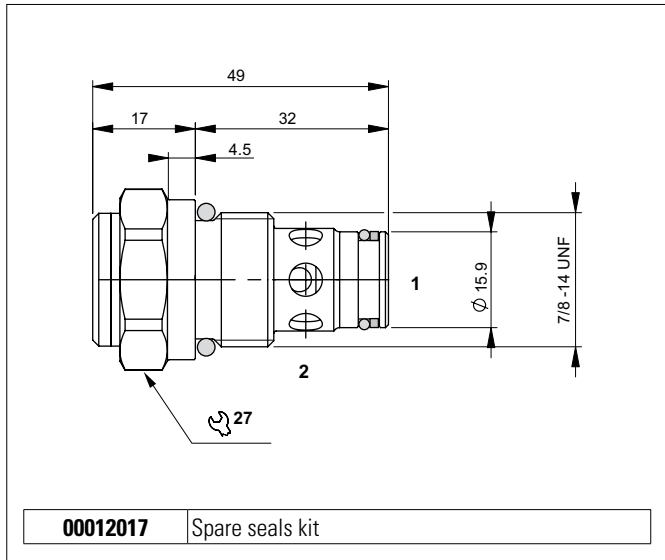


The check-valves permit one-directional oil flow only. On the opposite side the sealing is guaranteed by a hardened and ground taper steel poppet. The spring permits an easy valve installation in any position. External steel body protected on surface by zinc plating.


HYDRAULIC FEATURES

Max. working pressure	350 bar
Max. Flow	60 l/min
Max. Leakage (0 ÷ 5 drops/min)	0 ÷ 0.25 cm ³ /min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.10 kg
Tightening torque	35 ÷ 40 Nm
Cavity (7/8 - 14 UNF)	CD019007 (See section 15)

HYDRAULIC SYMBOL




PRESSURE DROPS

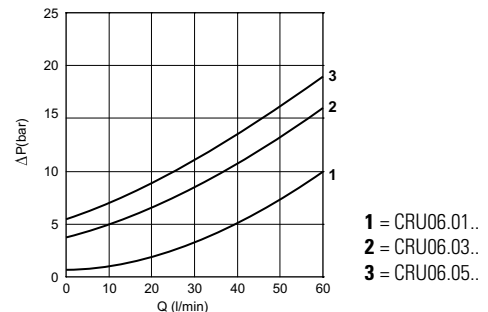


Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

ORDERING CODE

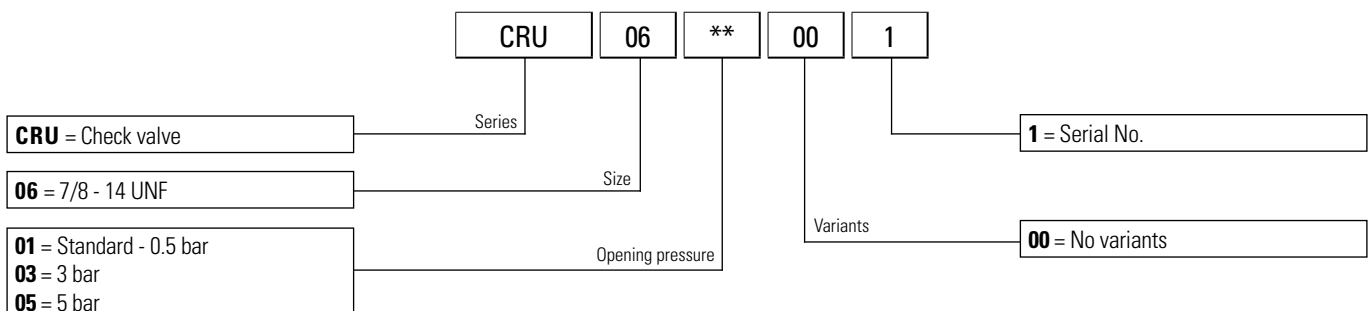

ONE-WAY CHECK VALVES (FOR POWER PACKS SERIES FP)

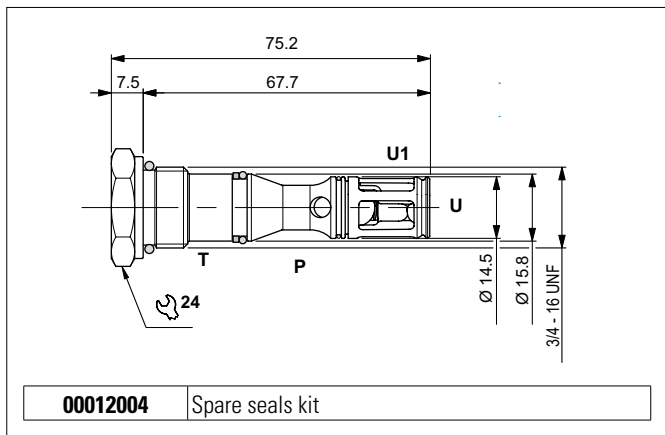


00012004 Spare seals kit

The check-valves permit one-directional oil flow only. On the opposite side the sealing is guaranteed by a ball steel poppet. The spring permits an easy valve installation in any position. External steel body protected on surface by zinc plating.


HYDRAULIC FEATURES

Max. working pressure	320 bar
Max. Flow	20 l/min
Max. Leakage (0 ÷ 5 drops/min)	0 ÷ 0.25 cm ³ /min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.09 kg
Tightening torque	25 ÷ 30 Nm
Cavity (3/4 - 16 UNF)	CD018013 (See section 15)

HYDRAULIC SYMBOL




PRESSURE DROPS (P → U)

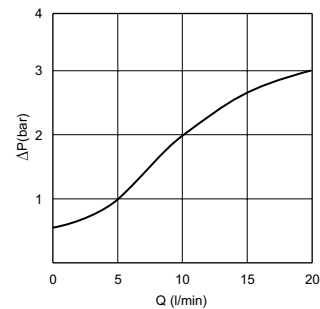


Fluid used: mineral based oil with viscosity 32 mm²/s at 50°C.

ORDERING CODE

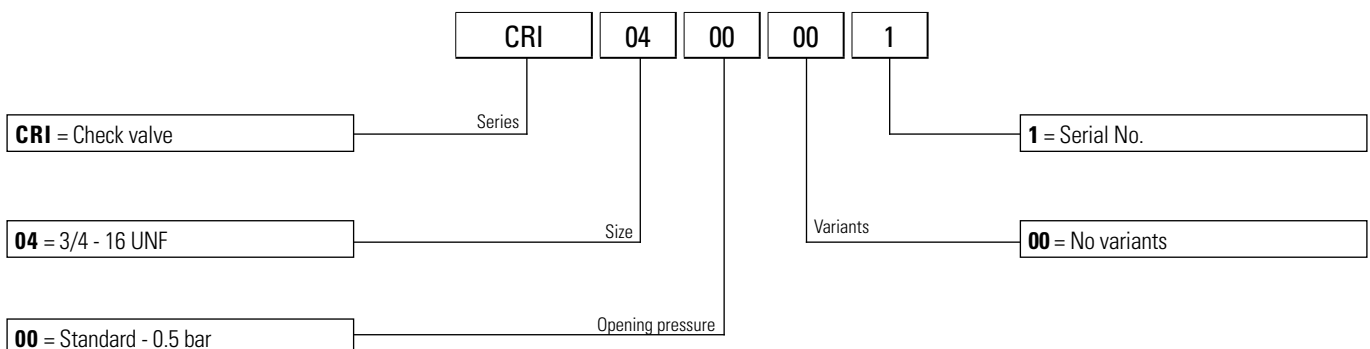

ONE-WAY CHECK VALVES

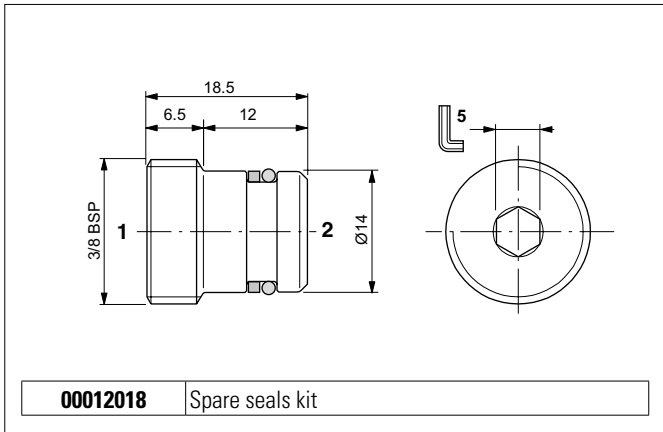


The unidirectional check valve allows oil to flow in only one direction. The guided ball seal is made of tempered and ground steel. The spring allows the valve to be mounted in any position. Steel body.


HYDRAULIC FEATURES

Max. working pressure	300 bar
Max. Flow	30 l/min
Max. Leakage (0 ÷ 5 drops/min)	0 ÷ 0.25 cm ³ /min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.09 kg
Tightening torque	16 ÷ 18 Nm
Cavity (3/8 BSP)	CG03004 (See section 15)

HYDRAULIC SYMBOL




PRESSURE DROPS

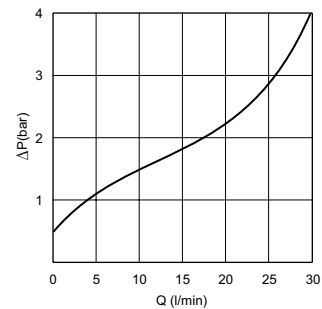


Fluid used: mineral based oil with viscosity 32 mm²/s at 40°C.

ORDERING CODE

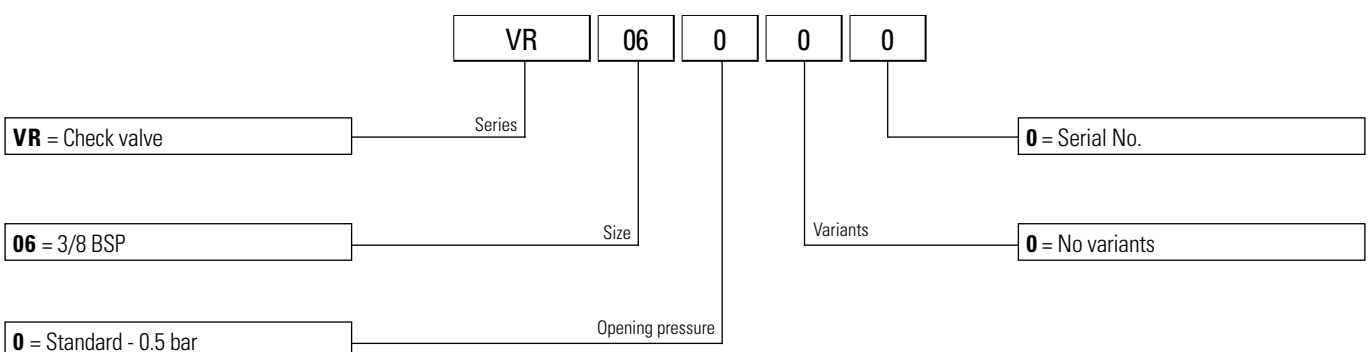

ONE-WAY CHECK VALVES

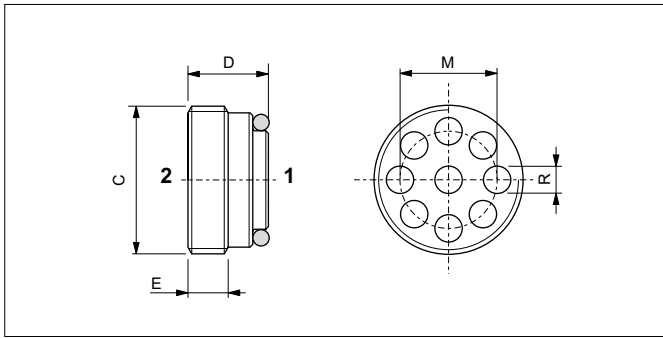


The unidirectional check valve allows oil to flow in only one direction. The guided half-ball seal is made of tempered and ground steel. The spring allows the valve to be mounted in any position. Steel body.

HYDRAULIC FEATURES

C	Flow max (l/min)	Pressure max (bar)	M (mm)	R (mm)	D (mm)	E (mm)	Tightening torque (Nm)	Weight (kg)
1/4 BSP	20	350	8.5	2.2	8.5	4.4	6	0.005
3/8 BSP	50	350	10.8	3	11.3	6	6	0.011
1/2 BSP	80	350	14.2	3.8	12.7	6.5	10	0.019


Max. Leakage (0 ÷ 5 drops/min)	0 ÷ 0.25 cm ³ /min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14

HYDRAULIC SYMBOL




SEAL

C	F (mm)	L (mm)
1/4 BSP	7	3
3/8 BSP	9	3.5
1/2 BSP	12	4.5




KEY FOR TIGHTENING VALVE

Code key	For valve	D (mm)	L (mm)	L1 (mm)	L2 (mm)
AVA174	VUI0400	11.4	120	105.5	100
AVA176	VUI0600	14.9	120	105.5	100
AVA178	VUI0800	18.6	120	105.5	100

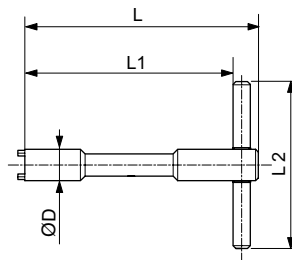


PRESSURE DROPS

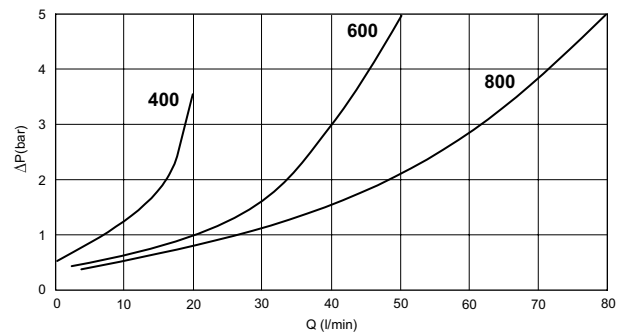


Fluid used: mineral based oil with viscosity 32 mm²/s at 40°C.

ORDERING CODE

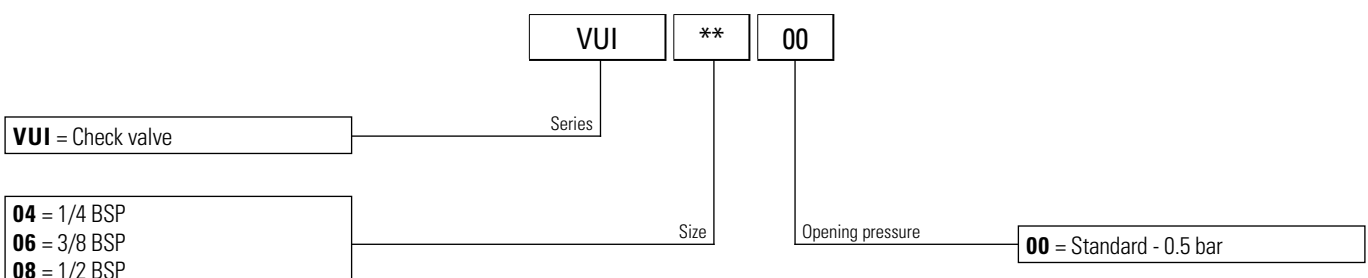

ONE-WAY CHECK VALVES - IN-LINE MOUNTING

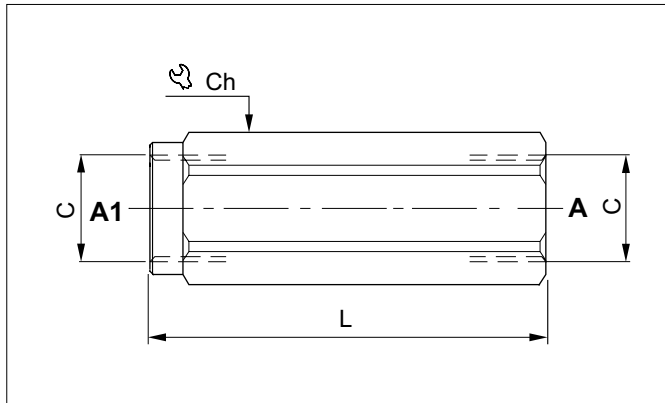


The check-valves permit one-directional oil flow only. On the opposite side the sealing is guaranteed by a hardened and ground taper steel poppet. The spring permits an easy valve installation in any position. External steel body protected on surface by a zinc plating.

HYDRAULIC FEATURES


Max. Leakage (0 ÷ 5 drops/min)	0 ÷ 0.25 cm ³ /min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14

HYDRAULIC SYMBOL

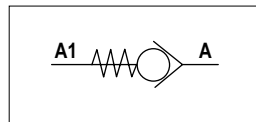

Code	C	Flow max (l/min)	Pressure max (bar)	L (mm)	Ch (mm)	Weight (kg)
VRU0400	1/4 BSP	20	350	59	19	0.10
VRU0600	3/8 BSP	35	350	66	24	0.17
VRU0800	1/2 BSP	50	350	78	27	0.24
VRU1200	3/4 BSP	85	300	90	36	0.49
VRU1600	1 BSP	140	250	112	40	0.67
VRU2000	1- 1/4 BSP	200	250	142	55	1.68
VRU2400	1- 1/2 BSP	310	210	155	60	2.10

PRESSURE DROPS

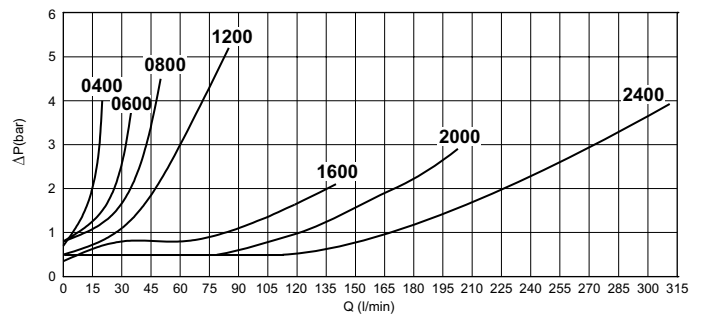

Fluid used: mineral based oil with viscosity 15 mm²/s at 40°C.

ORDERING CODE

VRU = Check valve

VRU

**

**

Series: VRU

Size: **


Setting pressure: **

CODE	04	06	08	12	16	20	24
00	0.7*	0.5*	0.5*	0.5*	0.5*	0.5*	0.5*
02				2*	2*		
03	4.5*	3*	3*	3*			
05	7.5*	5*	5*				
10	10*				10*		

☐ Standard
* Pressure - bar

04 = 1/4 BSP
06 = 3/8 BSP
08 = 1/2 BSP
12 = 3/4 BSP
16 = 1 BSP
20 = 1- 1/4 BSP
24 = 1- 1/2 BSP

CHECK VALVES FOR PIPES

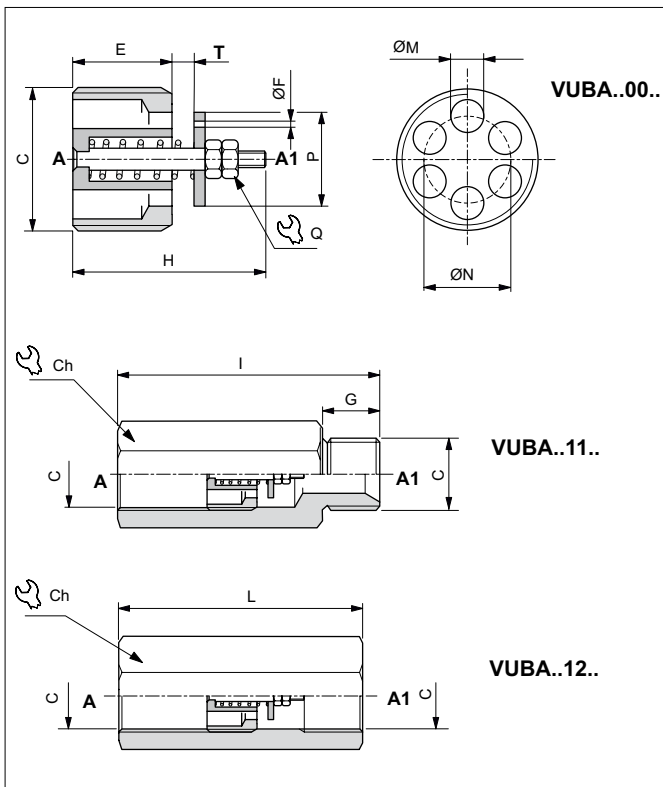


The pipe-pressure check valve is fitted directly on cylinder connections to prevent uncontrolled drops due to system faults. Supplied on request with a flow reducer hole F on the plate to enable leakage from A1 to A and allow the load to drop slowly. Steel body and plate. Seal surfaces lapped.

HYDRAULIC FEATURES

Max. Leakage (0 ÷ 5 drops/min)	0 ÷ 0.25 cm ³ /min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14



HYDRAULIC SYMBOL



Code	C	Flow min (l/min)	Flow max (l/min)	Pressure max (bar)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	L (mm)	M (mm)	N (mm)	P (mm)	Q (mm)	T* (mm)	Ch (mm)	Tightening torque (Nm)	Weight (kg)		
																		VUBA..00.	VUBA..11.	VUBA..12.
VUBA0400..	1/4 BSP	4	25	350	8	0.5 - 0.6	11	17.5	61	61	2.4	8.5	9.5	5.5	0.2 ÷ 1.0	19	2	0.007	0.07	0.09
VUBA0600 ..	3/8 BSP	6	50	350	10.5	0.8 - 1.0	13	23	63	63	3.5	10.5	12.5	5.5	0.2 ÷ 2.0	22	3	0.012	0.10	0.11
VUBA0800 ..	1/2 BSP	16	80	350	12	1.2 - 1.3	14	25	72	65	4.5	13	15	7	0.4 ÷ 2.6	27	4	0.023	0.17	0.16
VUBA1200 ..	3/4 BSP	25	150	350	17	1.5 - 1.9	17	30.5	104	72	6	16	18	7	0.3 ÷ 2.8	32	10	0.047	0.25	0.21


* Specify distance "T" with decimal progression. Standard distance "T" is 0.5 mm (for 1/4 and 3/8 BSP valves) and 0.7 mm (for 1/2 and 3/4 BSP valves). Response flow depends on distance "T" see "T adjustment curves".

DIAGRAMS FOR "T" ADJUSTEMENT

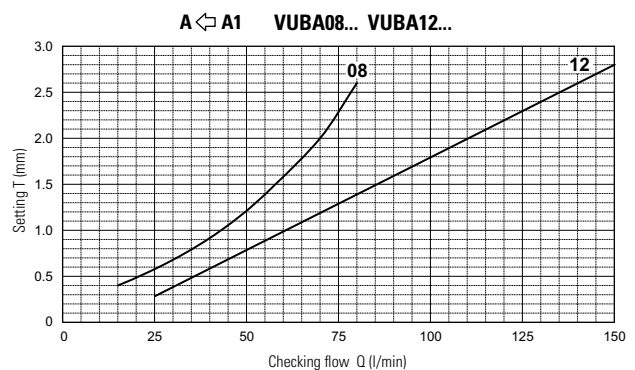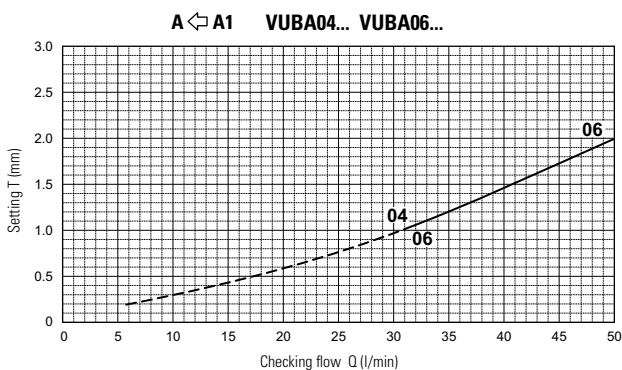

Distance "T" must correspond to a flow rate of at least 50% top than the set flow. The flow of checking flow may be ±10% on given curve. Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.


FLOW PRESSURE DROP ACCORDING ADJUSTEMENT "T"

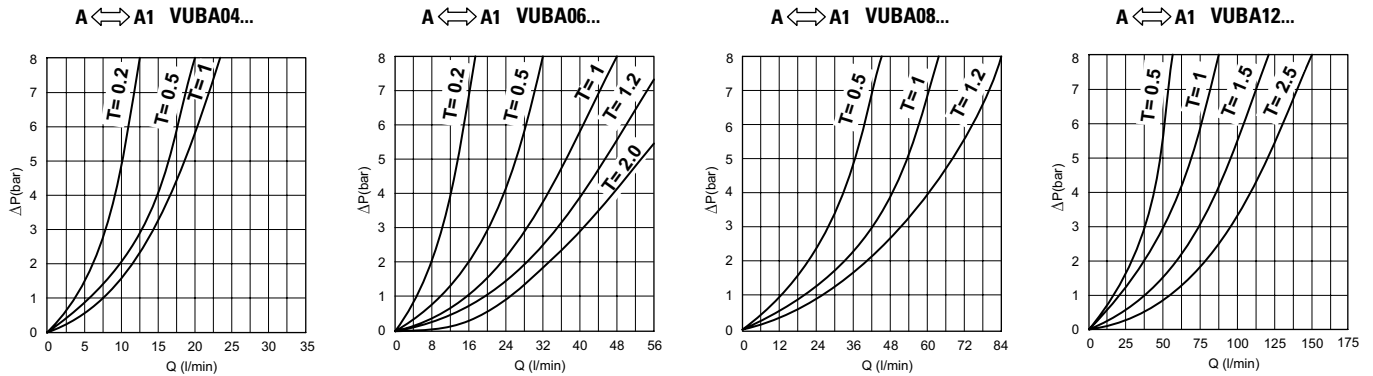


Diagrams flow pressure drop according adjustment length of "T"

KEY FOR TIGHTENING VALVE

Code key	For valve	D (mm)	L (mm)	L1 (mm)	L2 (mm)
AVA184	VUBA04..	11.3	120	110	60
AVA186	VUBA06..	15	120	110	80
AVA188	VUBA08..	18.8	120	108	80
AVA1812	VUBA12..	24	120	108	80

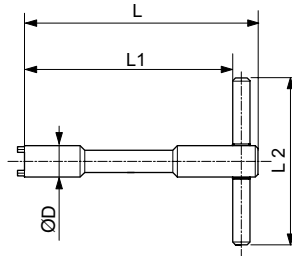


SERVICE EXAMPLE

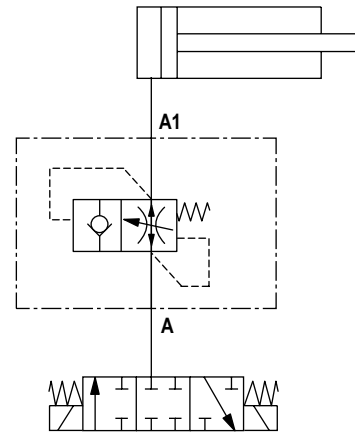

SEAL

C	H (mm)
1/4 BSP	11
3/8 BSP	11
1/2 BSP	15
3/4 BSP	16

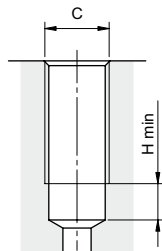

ORDERING CODE

VUBA	**	**	T***	F**
Series	Size	Versions	Setting T	Hole on the plate

VUBA = Check valve

04 = 1/4 BSP
06 = 3/8 BSP
08 = 1/2 BSP
12 = 3/4 BSP

00 = Cartridge only
11 = Complete valve M/F
12 = Complete valve F/F
01 = Only column M/F
02 = Only column F/F


NOTE:
(1-2) Special, minimum 100 pieces.
(2) Specify distance "T" with decimal progression (e.g. T020 = 0.20 mm).

Standard, without hole (omit code)	
Special holes (1)	
05 = 0.5 (mm)	13 = 1.3 (mm)
06 = 0.6 (mm)	15 = 1.5 (mm)
08 = 0.8 (mm)	19 = 1.9 (mm)
10 = 1.0 (mm)	20 = 2.0 (mm)
12 = 1.2 (mm)	

Standard settings (omit code)	
0.5 mm for dimensions 04-06	
0.7 mm for dimensions 08-12	

Special settings (2)	
020 ÷ 100 = 0.2 ÷ 1.0 mm for dimension 04	
020 ÷ 200 = 0.2 ÷ 2.0 mm for dimension 06	
040 ÷ 260 = 0.4 ÷ 2.6 mm for dimension 08	
030 ÷ 280 = 0.3 ÷ 2.8 mm for dimension 12	

SHUTTLE VALVES

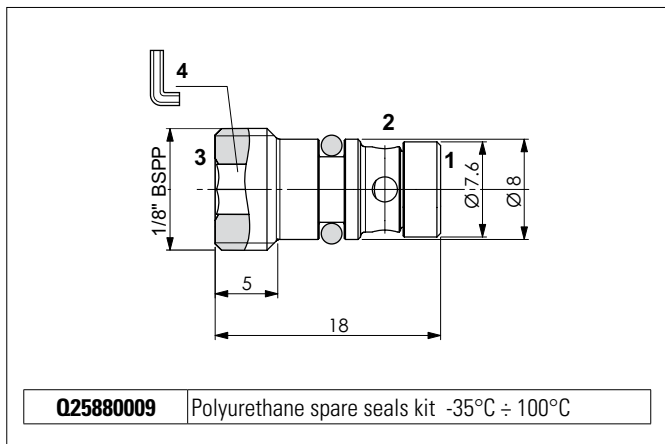


The shuttle type cartridge valves allow taking of the highest pressure signal to the external port via displacement of tempered and ground steel ball. There are usually employed to signal the actuator load to a load sensing pump pressure compensator. External steel body.


HYDRAULIC FEATURES

Max. working pressure	400 bar
Max. Flow	8 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.006 kg
Tightening torque	16 ÷ 18 Nm
Cavity (G 1/8)	CG001002 (See section 15)

HYDRAULIC SYMBOL




PRESSURE DROPS

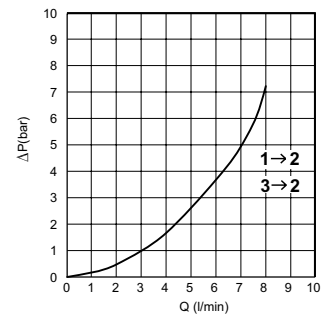


Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

ORDERING CODE

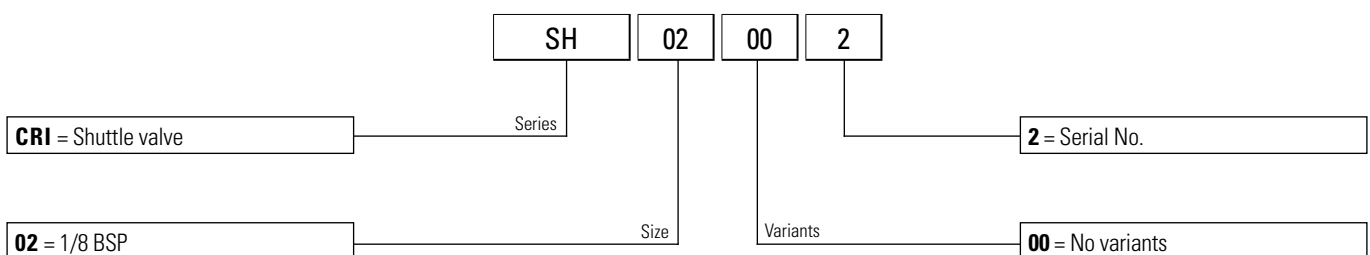

SHUTTLE VALVES

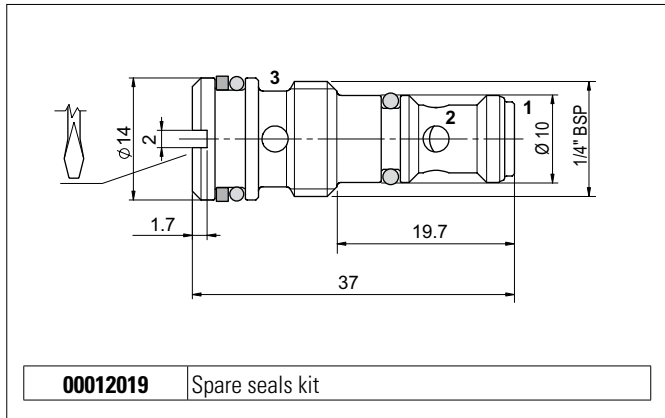


The shuttle type cartridge valves allow taking of the highest pressure signal to the external port via displacement of ball in tempered and ground steel. There are usually employed to signal the actuator load to a load sensing pump pressure compensator. External steel body protected on surface by zinc plating.


HYDRAULIC FEATURES

Max. working pressure	350 bar
Max. Flow	5 l/min
Max. Leakage (0 ÷ 5 drops/min)	0 ÷ 0.25 cm ³ /min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.023 kg
Tightening torque	18 ÷ 20 Nm
Cavity (1/4 BSP)	CA012001 (See section 15)

HYDRAULIC SYMBOL




PRESSURE DROPS

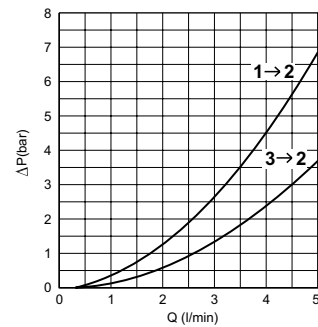


Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

ORDERING CODE

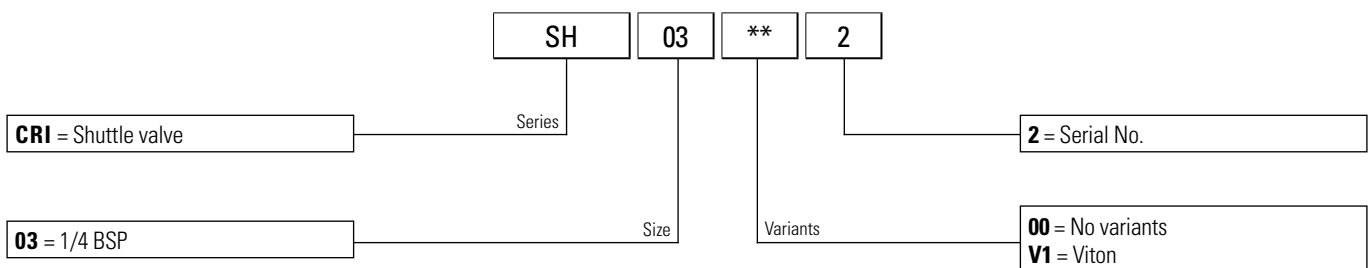


SHUTTLE VALVES

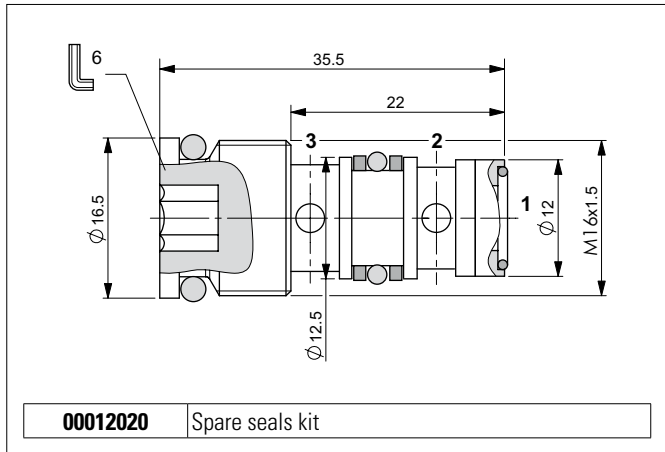

The shuttle type cartridge valves allow taking of the highest pressure signal to the external port via displacement of ball in tempered and ground steel. There are usually employed to signal the actuator load to a load sensing pump pressure compensator. External steel body protected on surface by zinc plating.

HYDRAULIC SYMBOL




HYDRAULIC FEATURES

Max. working pressure	380 bar
Max. Flow	10 l/min
Max. Leakage (0 ÷ 5 drops/min)	0 ÷ 0.25 cm ³ /min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.029 kg
Tightening torque	16 ÷ 18 Nm
Cavity (M16x1.5)	CN037003 (See section 15)

ORDERING CODE


Code	Type
RVLV0101160	Shuttle valve

PRESSURE DROPS

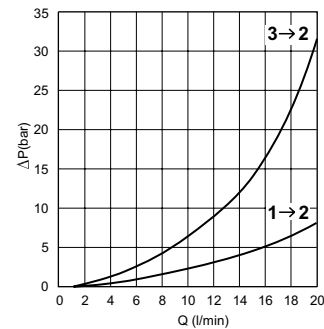

Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

PUMP UNLOADING VALVES

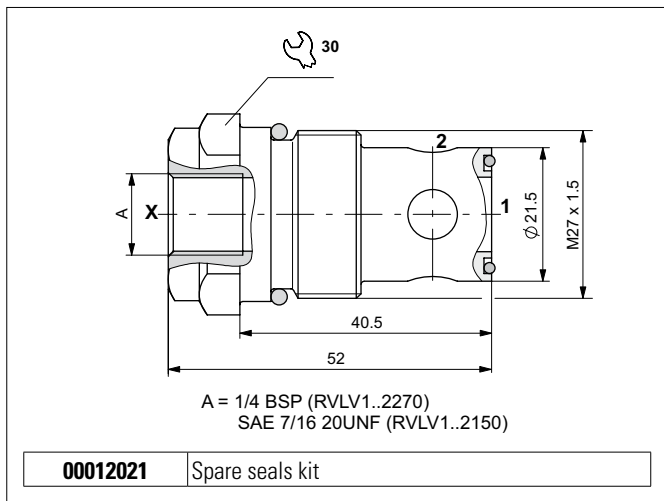

The normally-closed 2-way 2-position valve is used to connect a normally pressurised branch to the outlet in order to allow fluid to flow through the valve from 2 to 1.


Tapered poppet in tempered and ground steel, released when the pilot branch X is connected to the outlet.

It has a galvanised steel body.

HYDRAULIC FEATURES

Max. working pressure	380 bar
Max. Flow	140 l/min
Max. Leakage (0 ÷ 5 drops/min)	0 ÷ 0.25 cm ³ /min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.1422 kg
Tightening torque	22 ÷ 26 Nm
Cavity (M27x1.5)	CN059001 (See section 15)


HYDRAULIC SYMBOL



ORDERING CODE


Code	Type
RVLV1202270	Pump unloading valve (A = 1/4 BSP)
RVLV12021S0	Pump unloading valve (A = SAE 7/16 20UNF)

PRESSURE DROPS

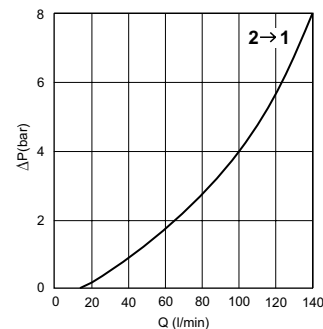


Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

PILOT CHECK VALVES

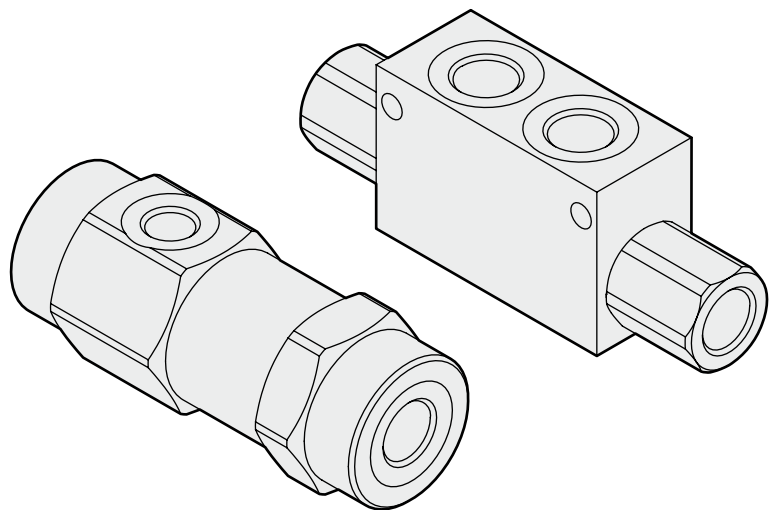

SINGLE ACTING PILOTED CHECK VALVES - IN-LINE MOUNTING

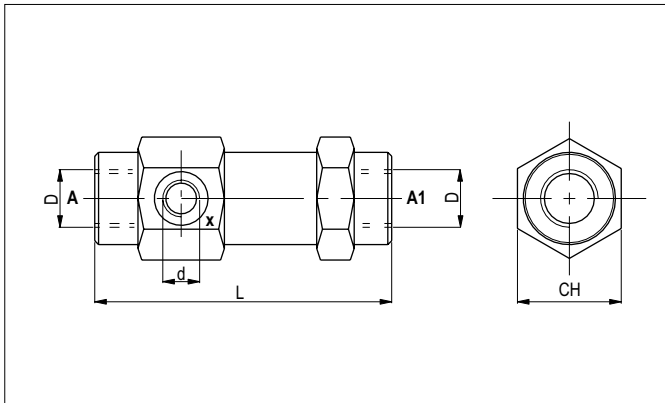


The pilot-operated check valve blocks a single-acting actuator in any position. Tapered poppet in tempered and ground steel, released by feeding the piloted opening X.
Can be mounted in any position; galvanised.

HYDRAULIC FEATURES


Max. working pressure	350 bar
Standard opening pressure	0.5 bar
Max. Leakage (0 ÷ 20 drops/min)	0 ÷ 1 cm ³ /min
Piloting ratio	See table
Max. Flow	85 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	2.8 ÷ 380 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	See table

Code	Flow max (l/min)	Pressure max (bar)	L (mm)	Ch (mm)	Piloting ratio	d	D	Weight (kg)
VRS07	12	350	103	36	1:9	1/4 BSP	1/4 BSP	0.65
VRS10	30	310	109	40	1:6	1/4 BSP	3/8 BSP	0.82
VRS13	45	310	120	42	1:4.5	1/4 BSP	1/2 BSP	0.96
VRS19	85	300	131	55	1:3.7	1/4 BSP	3/4 BSP	1.95

HYDRAULIC SYMBOL

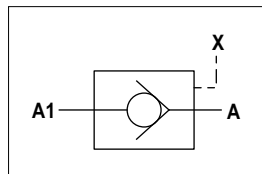


PRESSURE DROPS - FLOW

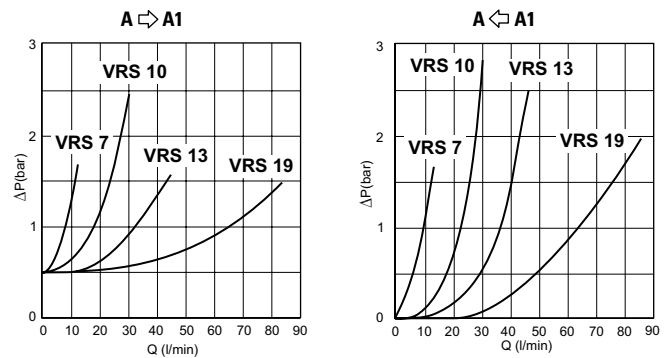


Fluid used: mineral based oil with viscosity 24 mm²/s at 50°C.

ORDERING CODE

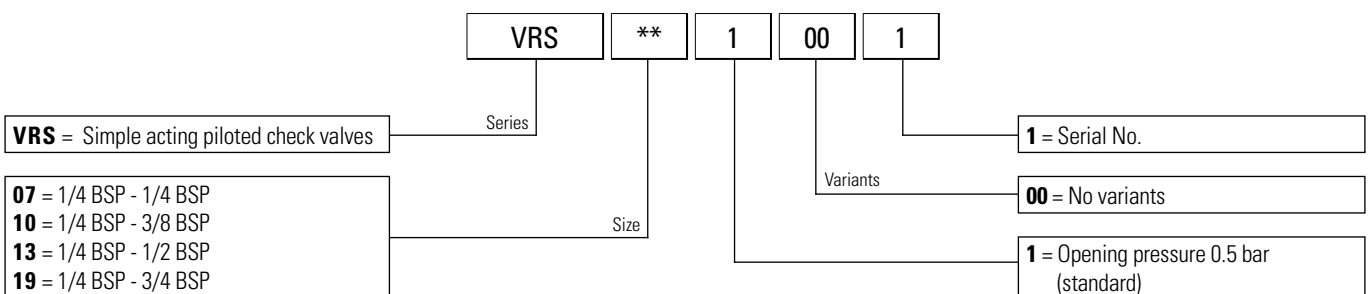

SINGLE AND DOUBLE ACTING PILOT CHECK VALVES - IN-LINE MOUNTING

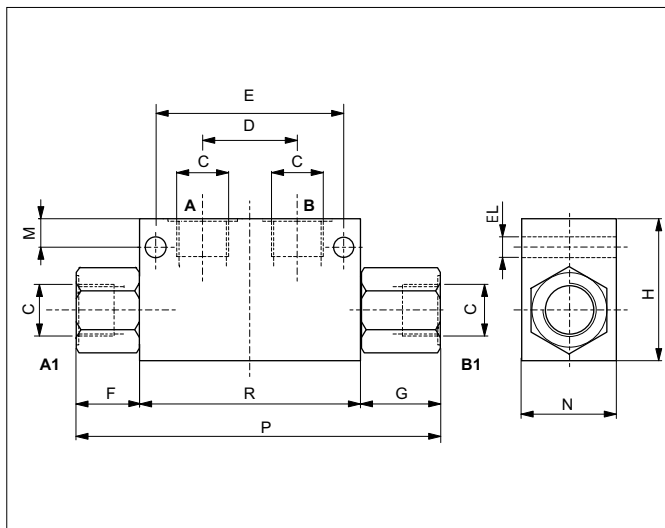

With the acting pilot check valves, a single or double acting actuator can be locked in any position.



Sealing is guaranteed by tempered, ground, tapered steel poppets, releasing is by venting the piloted openings "A" and "B" according to the valve pilot ratio. The valves can be mounted in any position and are protected externally by a zinc plating.

HYDRAULIC FEATURES


Max. Leakage (0 ÷ 5 drops/min)	0 ÷ 0.25 cm ³ /min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14

Code	C	Flow max (l/min)	Pressure max (bar)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	L (mm)	M (mm)	N (mm)	P (mm)	R (mm)	Weight (kg)	Pilot ratio
VBPSA0400	1/4 BSP	20	350	30	60	20	27	45	6.5	9	30	117	70	0.76	1:4
VBPSA0600	3/8 BSP	25	350	30	60	20	27	45	6.5	9	30	117	70	0.72	1:4
VBPSA0918	9/16-18 UNF	20	350	30	60	30.5	30.5	45	6.5	9	30	131	70	0.72	1:4
VBPSA0800	1/2 BSP	45	300	40	75	35	42	60	8	17	40	170	90	1.65	1:4
VBPSA1200	3/4 BSP	85	280	60	104	46	46	70	9	16	50	212	120	3.10	1:3.6
VBPDA0400	1/4 BSP	20	350	30	60	27	27	45	6.5	9	30	124	70	0.80	1:4
VBPDA0600	3/8 BSP	25	350	30	60	27	27	45	6.5	9	30	124	70	0.75	1:4
VBPDA0918	9/16-18 UNF	20	350	30	60	30.5	30.5	45	6.5	9	30	131	70	0.75	1:4
VBPDA0800	1/2 BSP	45	300	40	75	42	42	60	8	17	40	174	90	1.78	1:4
VBPDA1200	3/4 BSP	85	280	60	104	46	46	70	9	16	50	212	120	3.25	1:3.6









HYDRAULIC SYMBOLS



SERVICE EXAMPLE

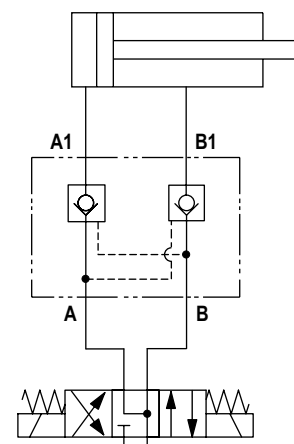


PRESSURE DROPS

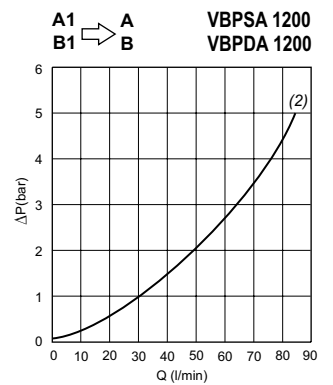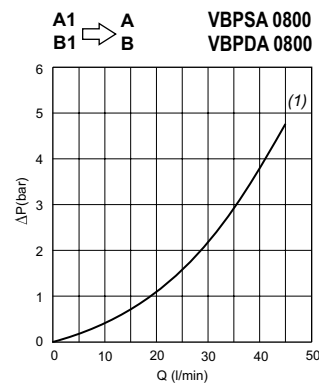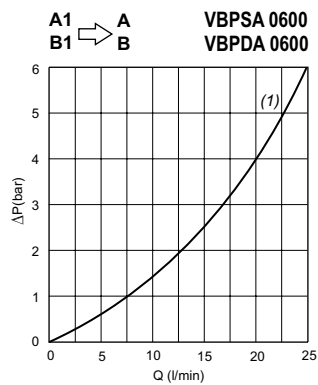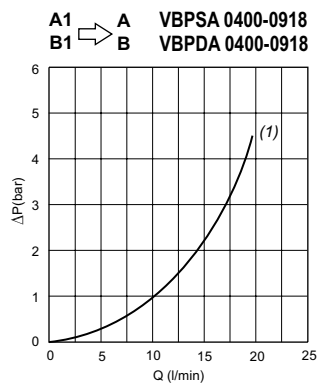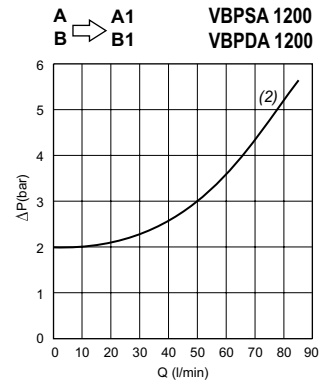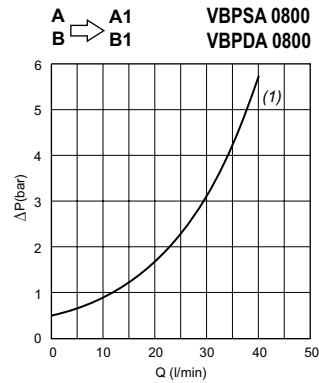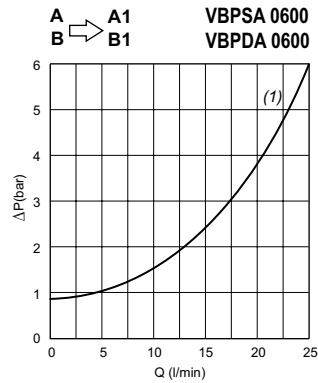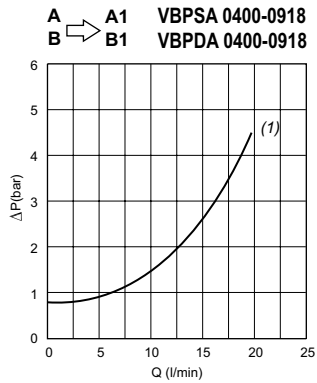


(1) Fluid used: mineral based oil with viscosity 15 mm²/s at 40°C.
 (2) Fluid used: mineral based oil with viscosity 24 mm²/s at 50°C.

ORDERING CODE

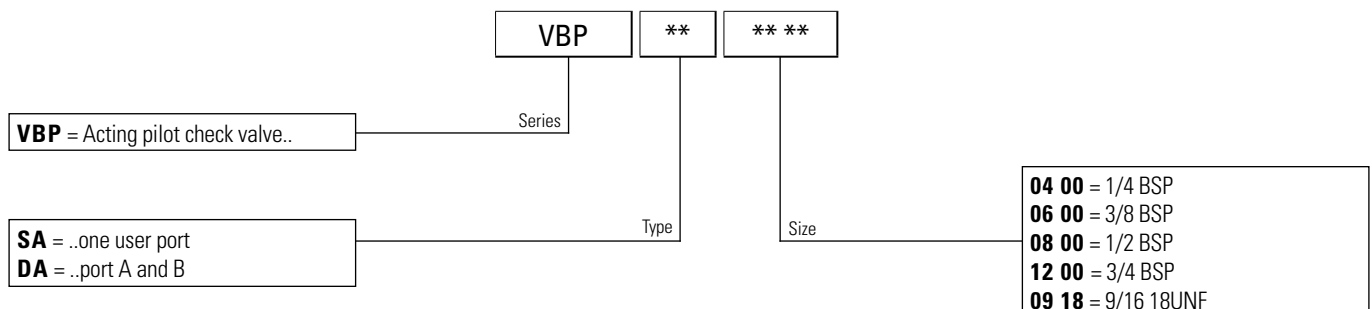

SINGLE AND DOUBLE ACTING PILOT CHECK VALVES-DIN 2353 PORTS - IN-LINE MOUNTING

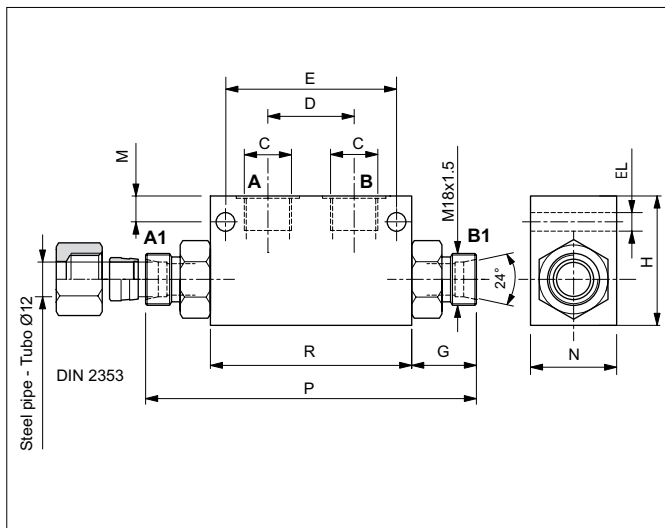

With the acting pilot check valves, a single or double acting actuator can be locked in any position.



Sealing is guaranteed by tempered, ground, tapered steel poppets, releasing is by venting the piloted openings "A" and "B" according to the valve pilot ratio. The valves can be mounted in any position and are protected externally by a zinc plating.

HYDRAULIC FEATURES


Max. Leakage (0 ÷ 5 drops/min)	0 ÷ 0.25 cm ³ /min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14

Code	C	Flow max (l/min)	Pressure max (bar)	D (mm)	E (mm)	G (mm)	H (mm)	L (mm)	M (mm)	N (mm)	P (mm)	R (mm)	Weight (kg)	Pilot ratio
VBPSA0412	1/4 BSP	20	350	30	60	22.5	45	6.5	9	30	115	70	0.83	1:4
VBPSA0612	3/8 BSP	25	350	30	60	22.5	45	6.5	9	30	115	70	0.75	1:4
VBPDA0412	1/4 BSP	20	350	30	60	22.5	45	6.5	9	30	115	70	0.83	1:4
VBPDA0612	3/8 BSP	25	350	30	60	22.5	45	6.5	9	30	115	70	0.75	1:4


HYDRAULIC SYMBOLS



SERVICE EXAMPLE

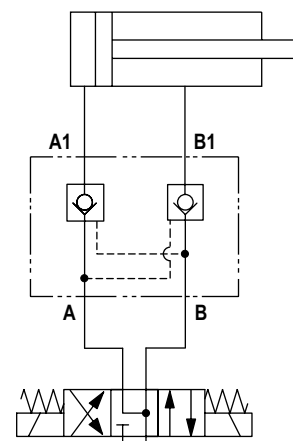

PRESSURE DROPS

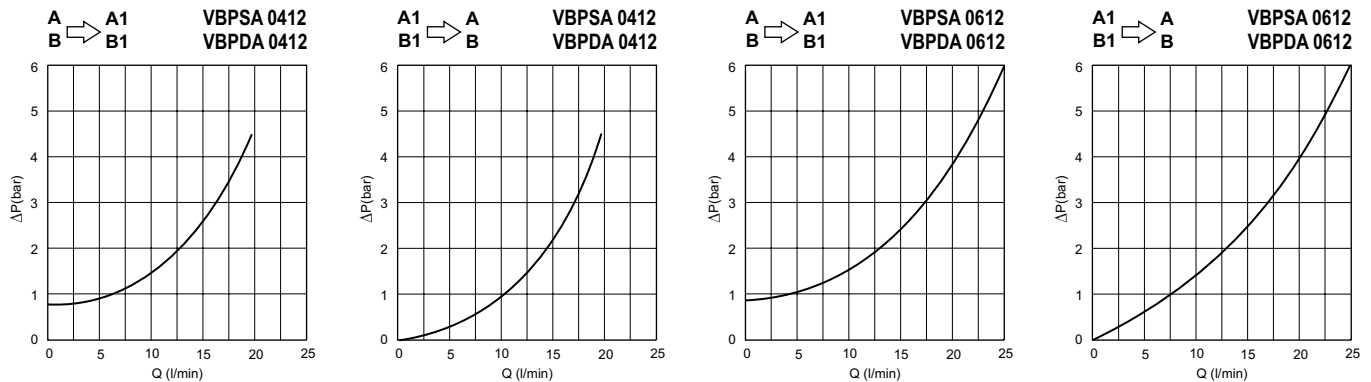


Fluid used: mineral based oil with viscosity 15 mm²/s at 40°C.


ACCESSORIES AND SPARE PARTS

	<p>Q51435044</p>	<p>Copper Washer</p>		<p>OD050612L</p>	<p>DIN Banjo</p>
	<p>RF05060000</p>	<p>Hollow screw</p>		<p>1: E341L12 2: E342L12</p>	<p>Nut (spare) Cutting ring (spare)</p>
	<p>OT0506T12</p>	<p>Banjo</p>		<p>Assembly example with steel pipe Ø 12 mm DIN 2353</p>	


ORDERING CODE

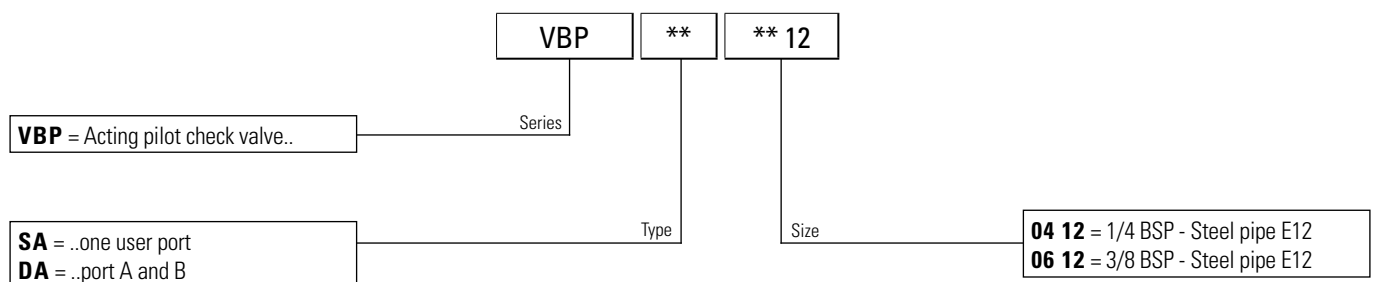

MANUAL AND PNEUMATIC OPERATED VALVES

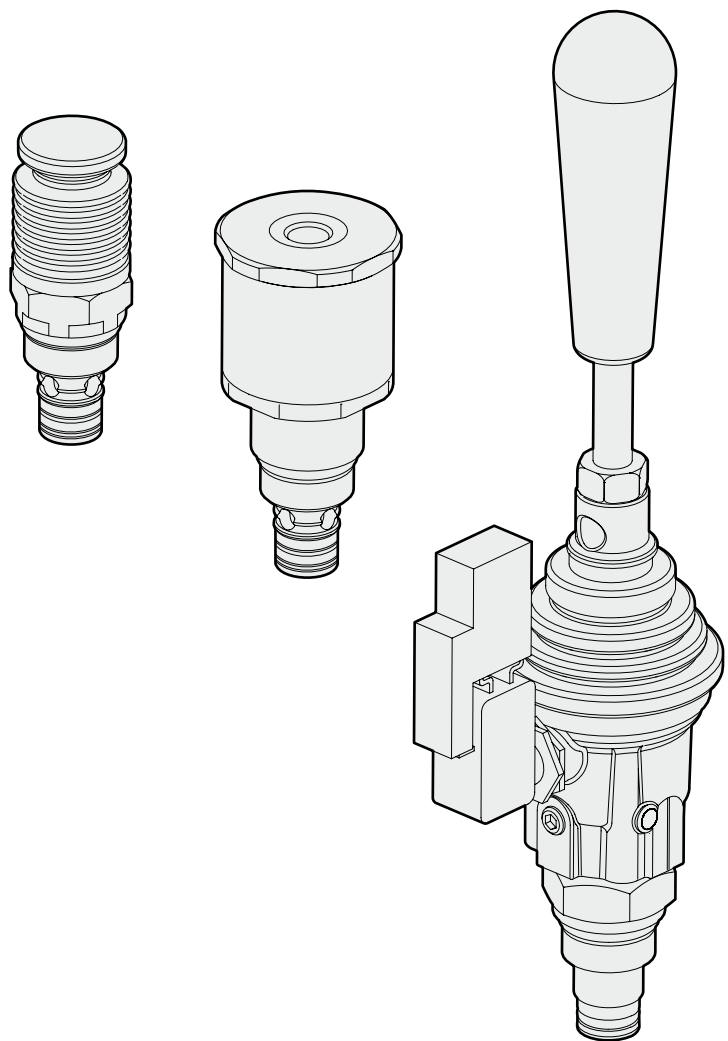

LEVER OPERATED VALVES

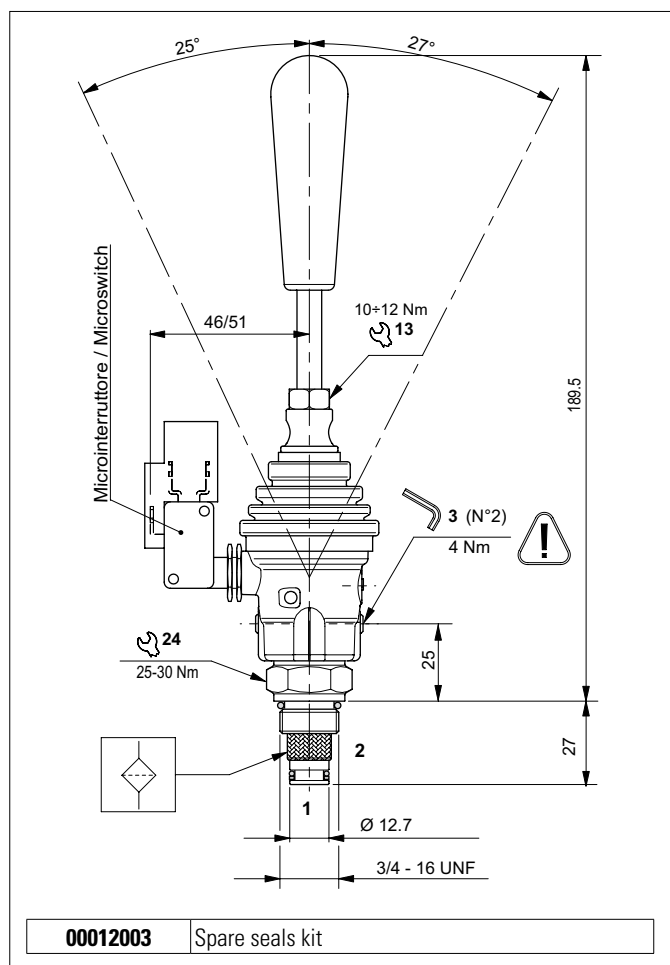

The direct acting, normally closed 2-way 2 position directional valve with manual control releases (load sensitive) pressure enabling fluid to flow through the valve from 2 to 1.
Tapered poppet is in tempered and ground steel.
Micro switch controlling a motor-driven pump relay supplied on request.
The lever body is in die-cast aluminium and the valve body in galvanised steel.


HYDRAULIC FEATURES

Max. working pressure	300 bar
Max. Flow	25 l/min
Max. Leakage (0 ÷ 5 drops/min)	0 ÷ 0.25 cm ³ /min
Working Temperature	-25°C ÷ 60°C
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Tightening torque	25 ÷ 30 Nm
Weight	0.25 kg
Cavity (3/4 - 16 UNF)	CD018014 (See section 15)

Microswitch version


Mechanical life endurance at 250 Vac	10A (1E4) - 5A (5E4)
Protection degree with connector	IP40

PRESSURE DROPS (With valve completely open)

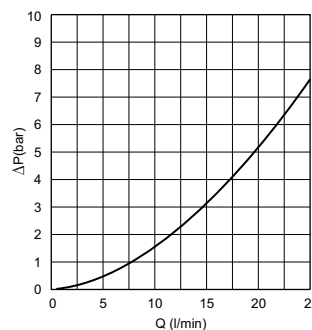


Fluid used: mineral based oil with viscosity 32 mm²/s at 40°C.

HYDRAULIC SYMBOLS




CMF04L
Without microswitch




CMF04M
With microswitch

ORDERING CODE

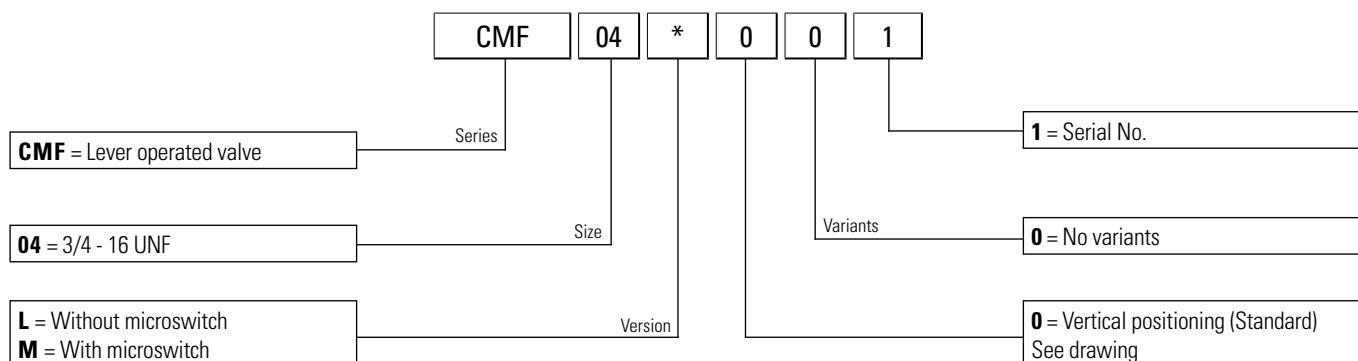

BUTTON OPERATED VALVES

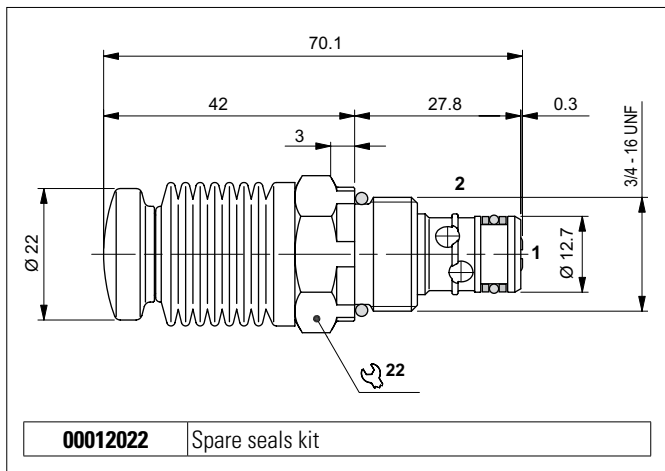


The direct acting, normally closed 2-way 2 position directional valve with manual control is used for emergencies. It is opened by pressing the button. The bi-directional tapered poppet is in tempered and ground steel. The valve body is in galvanised steel.


HYDRAULIC FEATURES

Max. working pressure	300 bar
Max. Flow	30 l/min
Max. Leakage (0 ÷ 20 drops/min)	0 ÷ 1 cm ³ /min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.107 kg
Tightening torque	25 ÷ 30 Nm
Cavity (3/4 - 16 UNF)	CD018006 (See section 15)

HYDRAULIC SYMBOL




PRESSURE DROPS

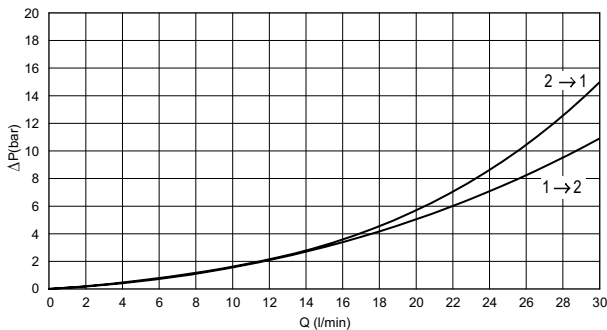


Fluid used: mineral based oil with viscosity 32 mm²/s at 40°C.

OPERAT. FORCE ON THE PUSH BUTTON

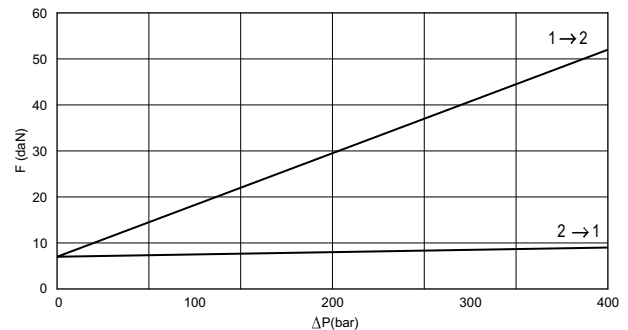


Fluid used: mineral based oil with viscosity 32 mm²/s at 40°C.

ORDERING CODE

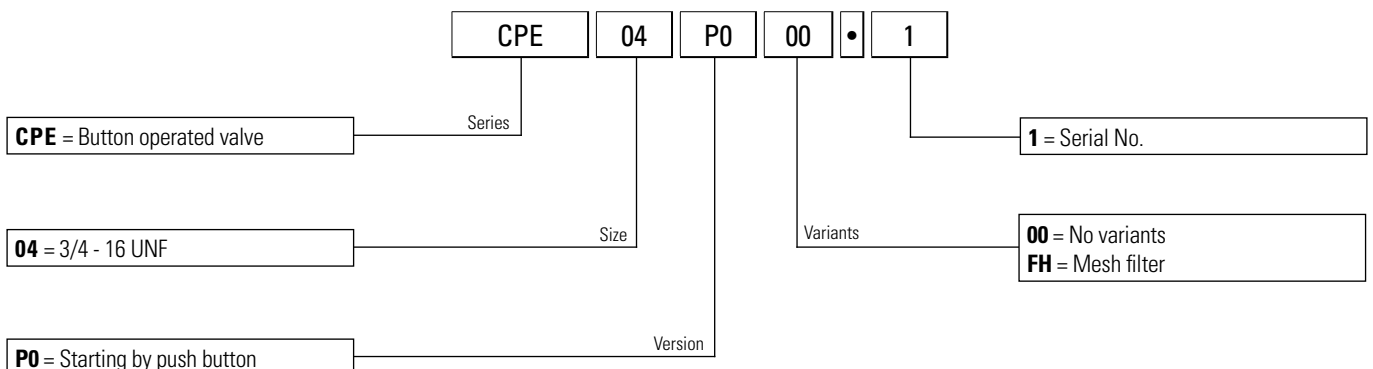

PNEUMATIC OPERATED VALVES

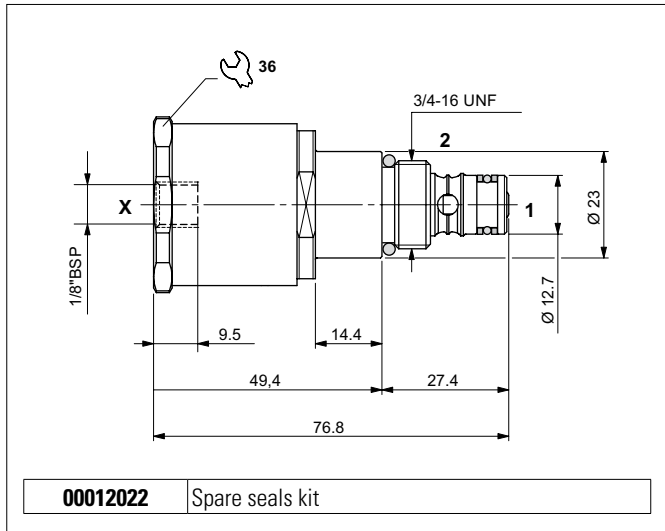


The direct acting, bi-directional way normally closed 2-way 2 position valve with pneumatic control releases the pressure enabling fluid to flow through the valve in both directions.

The bi-directional tapered poppet is in tempered and ground steel, released when the pilot branch X is connected to a pneumatic pressure signal. The valve body is in galvanised steel.


HYDRAULIC FEATURES

Max. working pressure	250 bar
Min. piloting pressure 1 → 2	5.5 bar
Min. piloting pressure 2 → 1	3.5 bar
Max. piloting pressure	20 bar
Max. Flow	30 l/min
Max. Leakage (0 ÷ 20 drops/min)	0 ÷ 1 cm ³ /min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.107 kg
Tightening torque	25 ÷ 30 Nm
Cavity (3/4 - 16 UNF)	CD018006 (See section 15)


HYDRAULIC SYMBOL



PRESSURE DROPS

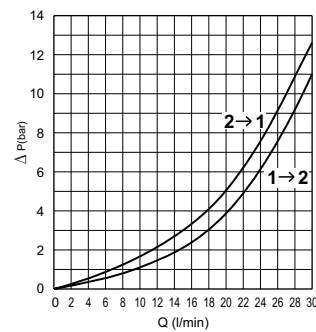


LIMITS OF USE

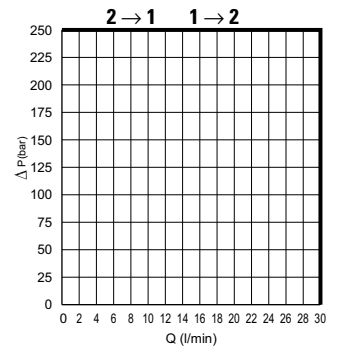


Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.


ORDERING CODE

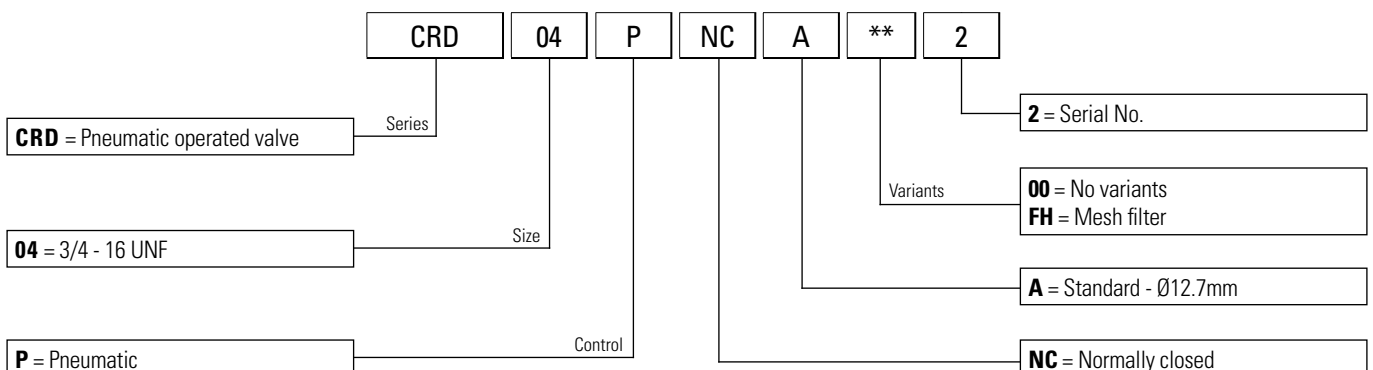

END-OFF STROKE VALVES

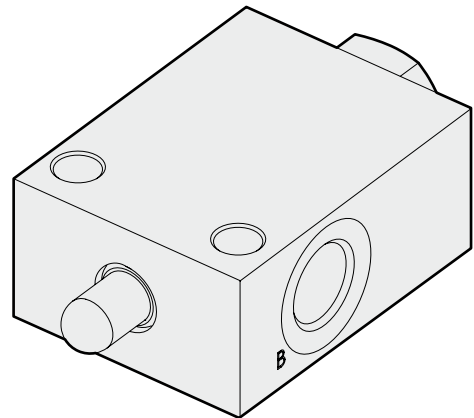

END-OFF STROKE VALVES - IN-LINE MOUNTING

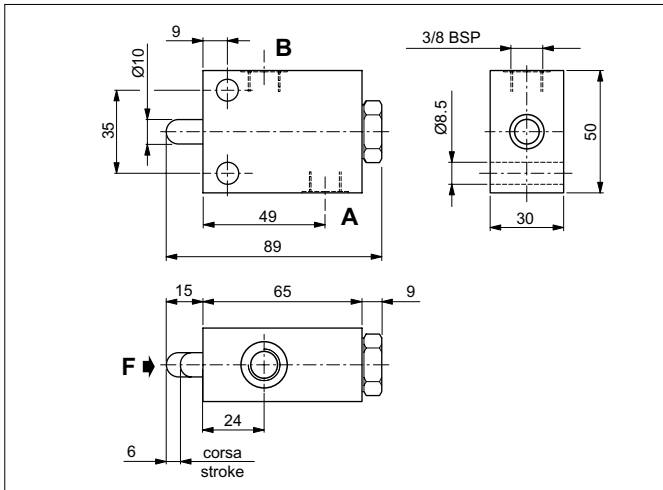


The direct acting normally closed 2-way 2-position directional valve with manual control is fitted on a branch to release the pressure; a pusher enables the fluid to pass through the valve from A to B. Tapered poppet is in tempered and ground steel. The valve body is in galvanised steel.


HYDRAULIC FEATURES

Max. working pressure	300 bar
Max. Flow	40 l/min
Max. Leakage (0 ÷ 5 drops/min)	0 ÷ 0.25 cm ³ /min
Max. mechanical push force (F) required at 300 bar	240 daN
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.68 kg

HYDRAULIC SYMBOL




PRESSURE DROPS

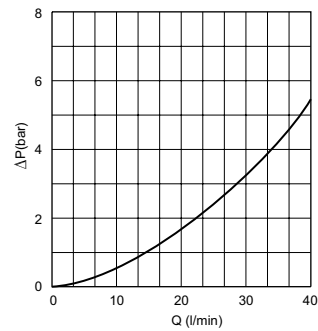


Fluid used: mineral based oil with viscosity 15 mm²/s at 40°C.

ORDERING CODE

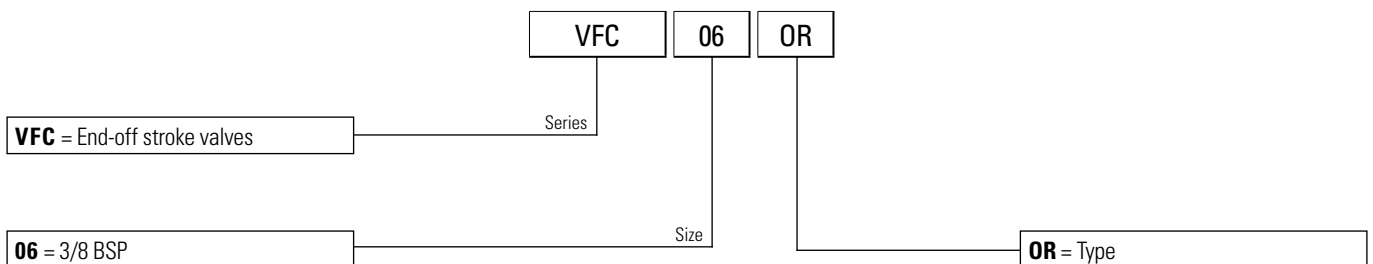

DECELERATION VALVES - IN-LINE MOUNTING

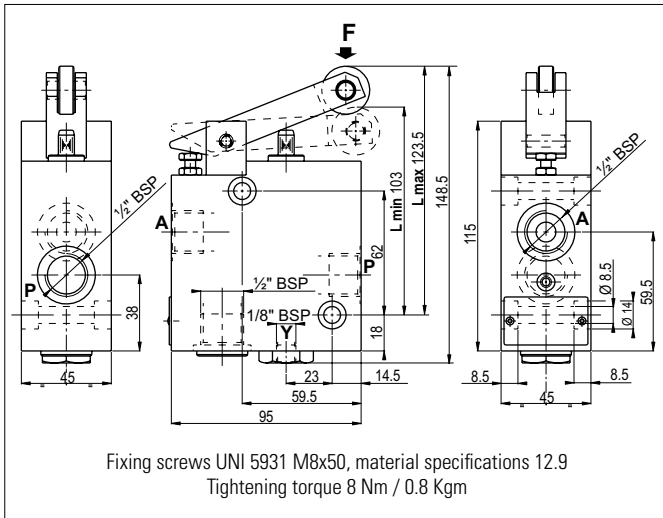


These valves are used as cam controlled unidirectional flow regulators. Normally mounted in line between actuator and directional valve for the displacement of carriages or slides, they enable cam controlled acceleration or deceleration of the moving mass.

A special internal check valve allows free flow the opposite direction. To ensure correct functioning, connect "Y" to draining line.


HYDRAULIC FEATURES

Max. working pressure	180 bar
Max. Flow	40 l/min
Max. Leakage	0.06 l/min
Cam travel	See diagram
Max. mechanical push force (F)	100 N
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	2.8 kg


HYDRAULIC SYMBOL

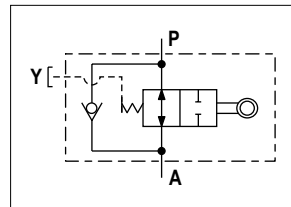


FLOW RATE / Lmin-Lmax

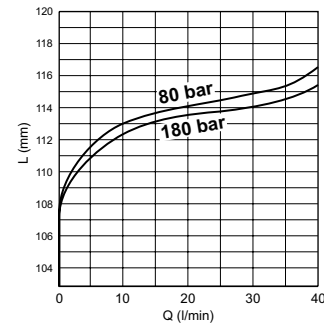


ORDERING CODE

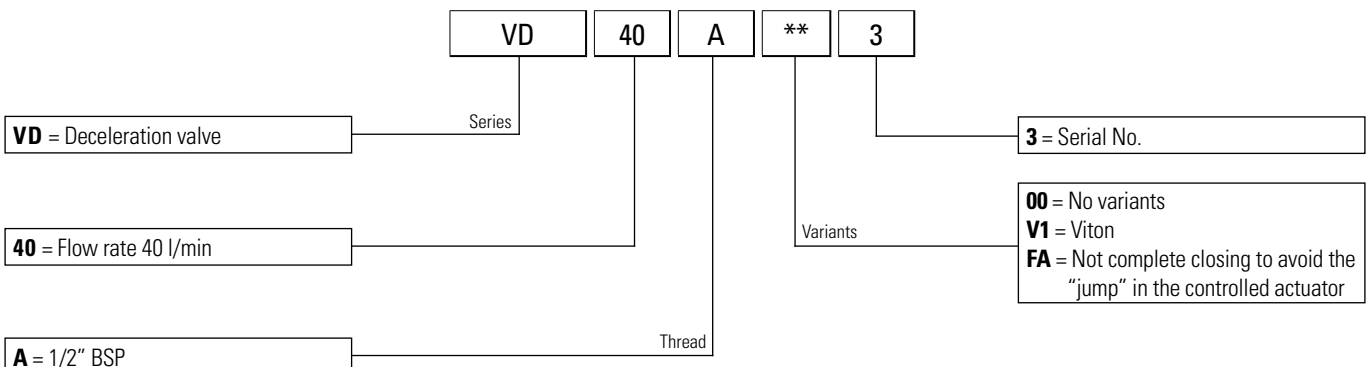

SOLENOID VALVES 2-WAY

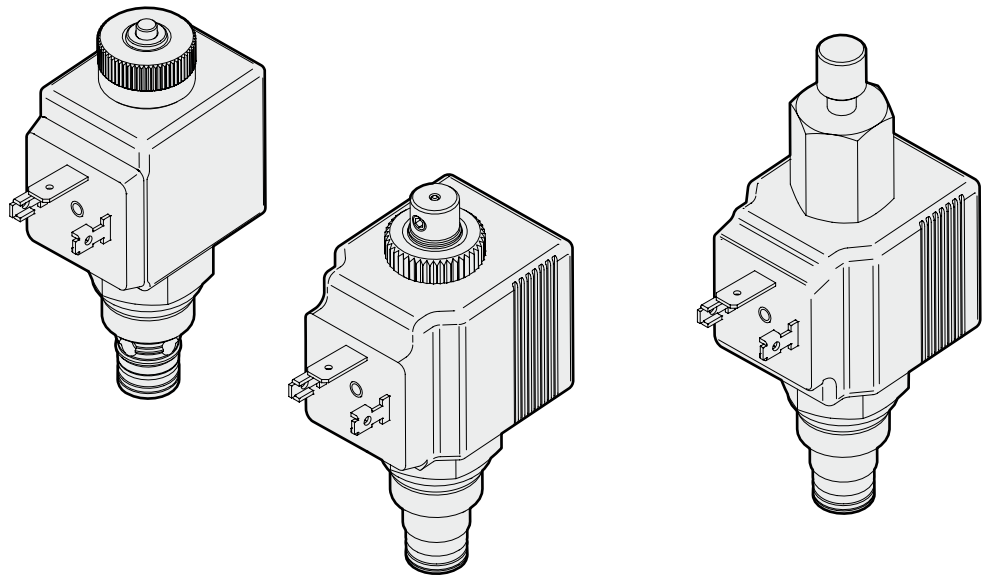


PILOTED OPERATED SOLENOID VALVE

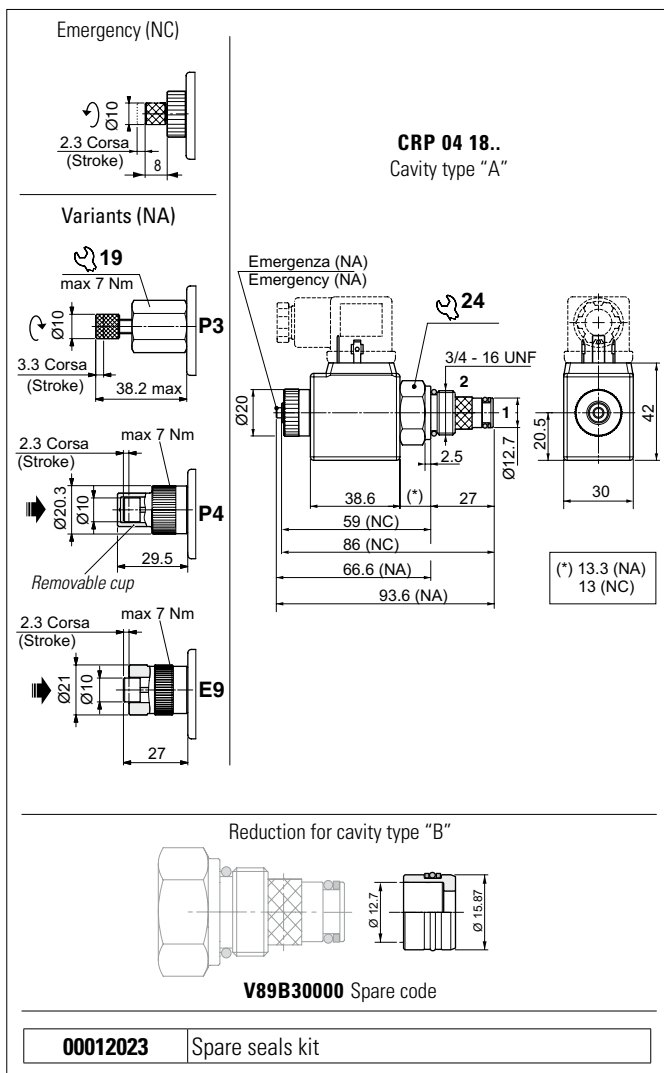


Connector to be ordered separately, see sect. 18


HYDRAULIC SYMBOLS




CRP - Normally open



CRP - Normally closed



CRB - Normally open



CRB - Normally closed

The pilot-operated electric 2-way 2-position directional valve is controlled electrically.

The tapered poppet is in tempered and ground steel.

Available in normally open (NA) or normally closed (NC) versions.

Valve	Free passage	Coil	Type
CRP..NA	2 → 1	DE-ENERGISED	Unidirectional
CRP..NC	2 → 1 1 → 2	ENERGISED DE-ENERGISED	
CRB..NA	1 → 2 2 → 1	DE-ENERGISED	Bidirectional
CRB..NC	1 → 2 2 → 1	ENERGISED / DE-ENERGISED ENERGISED	

Normally closed valves can work with DC or AC coils.

Normally open valves work with DC coils whereas RAC coils with a connector and incorporated rectifier must be used for AC applications.

The NC valve sleeve is in galvanised steel and the NA valve sleeve with nickel coated.


FEATURES

Max. pressure	300 bar
Max. Flow	40 l/min
Max. Leakage (0 ÷ 10 drops/min)	0 ÷ 0.5 cm ³ /min
Max. excitation frequency	2 Hz
Duty cycle	100% ED
Hydraulic fluids	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Cartridge filter	280µm
Type of protection (in relation to the connection used)	IP65
Weight (with coil)	0.27 kg
Cartridge tightening torque	25 ÷ 30 Nm
Coil ring nut tightening torque	7 Nm
Emergency tightening torque	
Cavity standard "A" (3/4 - 16 UNF)	CD018006 (See section 15)
Cavity standard "A" + seat VSCOA**01	CD018009 (See section 15)
Cavity with reduction "B" (3/4 - 16 UNF)	CD018012 (See section 15)


PRESSURE DROPS

LIMITS OF USE



CRB..NA (1 → 2 2 → 1)
CRP..NA (2 → 1)

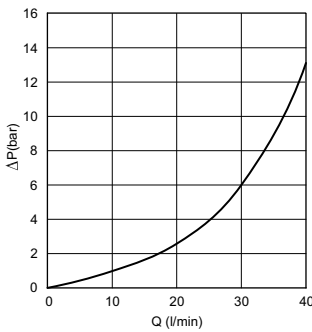

CRB..NC (2 → 1)
CRP..NC (2 → 1)

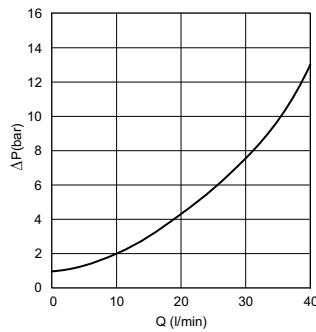

CRB..NC (1 → 2)
CRP..NC (1 → 2)

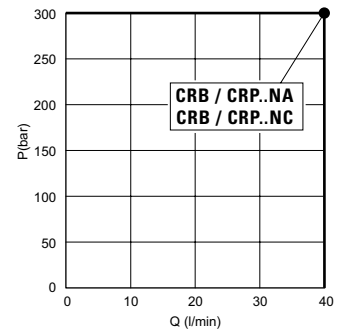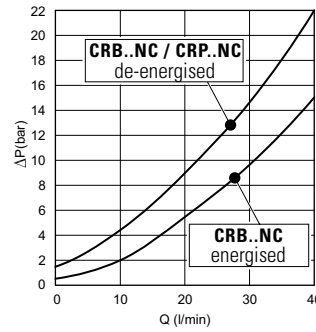


The tests were carried out with the solenoids at operating temperature, with a supply voltage 10% below nominal value and with a 40°C fluid temperature. The fluid used is a mineral oil with viscosity of 46 mm²/s at 40°C.

ORDERING CODE

	CR*	04	18	**	*	*	*	**	*															
	Series	Size	Coil	Version	Seat size	Version	Voltage	Variants																
<p>CRB = Piloted solenoid valve bidirectional</p> <p>CRP = Piloted solenoid valve unidirectional</p>		<p>04 = 3/4 - 16 UNF</p>	<p>18 = 18W dc (NA-NC) - C30</p>	<p>NA = Normally open (solo con bobine DC o RAC)</p> <p>NC = Normally closed</p>	<p>A = Standard - Ø 12.7 mm</p> <p>B = With reduction - Ø 15.9 mm</p>	<p>S = Without emergency (NC)</p> <p>E = With emergency (NA-NC)</p>		<p>00 = No variants</p> <p>P4 = Push button Emergency with removable protection (..NA)</p> <p>P3 = Rotary Emergency (..NA)</p> <p>E9 = Push button Emergency direct control (..NA)</p> <p>SF = Without cartridge filter</p> <p>FK = With flying leads 600 mm (1)</p> <p>CX = Deutsch connection with bidirectional diode (2)</p> <p><i>Connector to be ordered separately, see sect. 18</i></p>	<p>1 = CRB - Serial No.</p> <p>3 = CRP - Serial No.</p>															
							<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">DC 18W (C30)</th> <th style="text-align: left;">AC 18W (C30) (7)</th> </tr> </thead> <tbody> <tr> <td>L = 12 VDC</td> <td>A = 24 VAC 50 Hz</td> </tr> <tr> <td>M = 24 VDC</td> <td>J = 115 VAC 50 Hz</td> </tr> <tr> <td>N = 48 VDC</td> <td>I = 230 VAC 50 Hz</td> </tr> <tr> <td>2 = 21.6 VDC RAC (3)</td> <td>F = 24 VAC 60 Hz</td> </tr> <tr> <td>Z = 102 VDC RAC (4)</td> <td>C = 110 VAC 60 Hz</td> </tr> <tr> <td>X = 205 VDC RAC (5)</td> <td>D = 220 VAC 60 Hz</td> </tr> <tr> <td>W = Without coil (6)</td> <td></td> </tr> </tbody> </table>	DC 18W (C30)	AC 18W (C30) (7)	L = 12 VDC	A = 24 VAC 50 Hz	M = 24 VDC	J = 115 VAC 50 Hz	N = 48 VDC	I = 230 VAC 50 Hz	2 = 21.6 VDC RAC (3)	F = 24 VAC 60 Hz	Z = 102 VDC RAC (4)	C = 110 VAC 60 Hz	X = 205 VDC RAC (5)	D = 220 VAC 60 Hz	W = Without coil (6)		
DC 18W (C30)	AC 18W (C30) (7)																							
L = 12 VDC	A = 24 VAC 50 Hz																							
M = 24 VDC	J = 115 VAC 50 Hz																							
N = 48 VDC	I = 230 VAC 50 Hz																							
2 = 21.6 VDC RAC (3)	F = 24 VAC 60 Hz																							
Z = 102 VDC RAC (4)	C = 110 VAC 60 Hz																							
X = 205 VDC RAC (5)	D = 220 VAC 60 Hz																							
W = Without coil (6)																								
									<p><i>Coils technical data, see sect. 17</i></p>															

<p>(1) Only voltages 12 VDC - 24 VDC</p> <p>(2) Only voltages 12 VDC - 24 VDC</p> <p>(3) With rectifier: 24 VAC/50-60Hz</p> <p>(4) With rectifier: 115 VAC/50Hz - 120VAC/60Hz</p>	<p>(5) With rectifier: 230 VAC/50Hz - 240VAC/60Hz</p> <p>(6) Performance are guaranteed only using valves completed with BFP coil</p> <p>(7) Only for NC valves</p>
---	---

HIGH PRESSURE PILOTED OPERATED SOLENOID VALVE

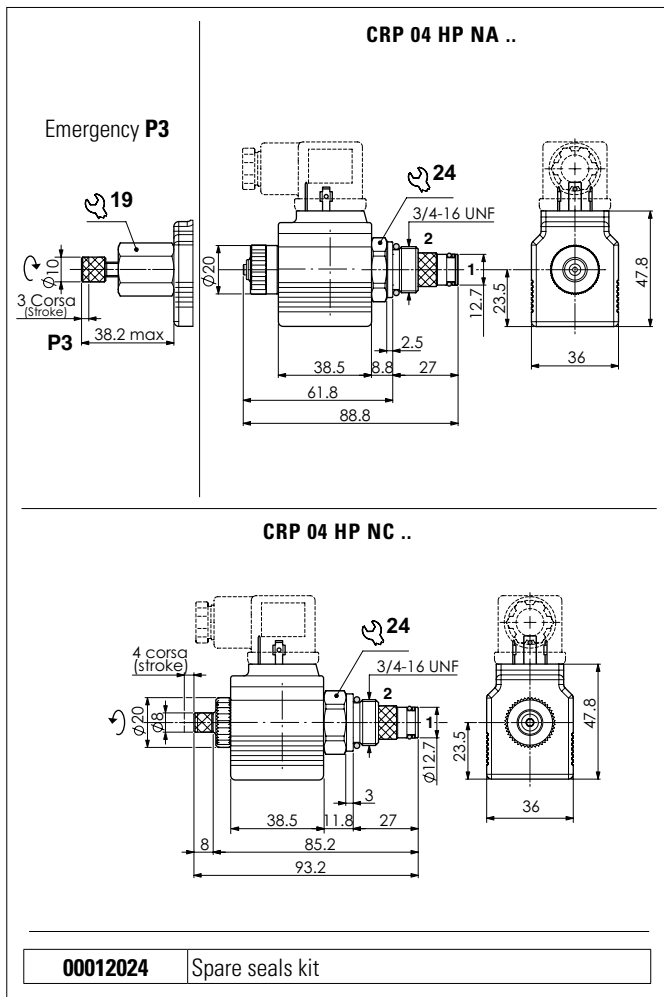

Connector to be ordered separately, see sect. 18

The pilot-operated electric 2-way 2-position directional valve is controlled electrically. For high pressures.

The tapered poppet is in tempered and ground steel.

Available in normally open (NA) or normally closed (NC) versions.

- NA, free passage from 2 to 1 with de-energised coil.
- NC, free passage from 2 to 1 with energised coil or from 1 to 2 with de-energised coil.


The valves work with DC coils whereas RAC coils with a connector with incorporated rectifier must be used for AC applications.

The sleeve is in galvanised steel.


FEATURES

Max. pressure	370 bar
Max. Flow	30 l/min
Max. Leakage (0 ÷ 10 drops/min)	0 ÷ 0.5 cm ³ /min
Max. excitation frequency	2 Hz
Duty cycle	100% ED
Hydraulic fluids	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Cartridge filter	280µm
Type of protection (in relation to the connection used)	IP65
Weight (with coil)	0.35 kg
Cartridge tightening torque	25 ÷ 30 Nm
Coil ring nut tightening torque	7 Nm
Cavity (3/4 - 16 UNF)	CD018006 (See section 15)

HYDRAULIC SYMBOLS




Normally open




Normally closed

PRESSURE DROPS

CRP 04 HP NC.

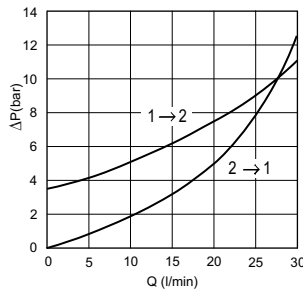


CRP 04 HP NA.

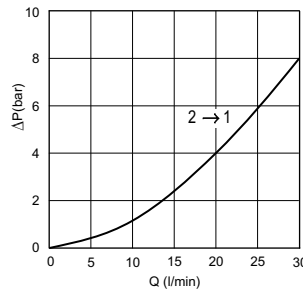

1 → 2 Only with coil not energised

LIMITS OF USE

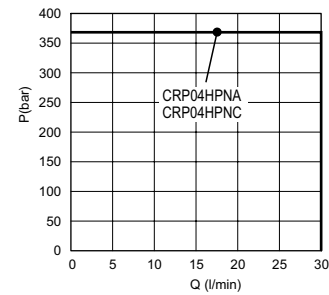

The tests were carried out with the solenoids at operating temperature, with a supply voltage 10% below nominal value and with a 40°C fluid temperature. The fluid used is a mineral oil with viscosity of 46 mm²/s at 40°C.

ORDERING CODE

CRP	04	HP	**	A	E	*	**	1
Series	Size	Version	Version	Seat size	Version	Voltage	Variants	Serial No.
CRP = High pressure piloted operated solenoid valve	04 = 3/4 - 16 UNF	HP = High pressure	NA = Normally open NC = Normally closed	A = Standard - Ø 12.7 mm	E = With emergency	L = 12 VDC M = 24 VDC N = 48 VDC V = 28 V DC 4 = 14 VDC	00 = No variants P3 = Rotary emerg. (...NA) SF = Without cartridge filter	1 = Serial No.
							FK = With flying leads 600 mm (1) AJ = AMP Junior connection (1)	
							<i>Connector to be ordered separately, see sect. 18</i>	
							DC 22W (C36)	
							2 = 21.6 VDC RAC (2) Z = 102 VDC RAC (3) X = 205 VDC RAC (4) W = Without coil (5)	
							<i>Coils technical data, see sect. 17</i>	

(1) Only voltages 12 VDC - 24 VDC


(2) With rectifier: 24 VAC/50-60Hz

(3) With rectifier: 115 VAC/50Hz - 120 VAC/60Hz

(4) With rectifier: 230 VAC/50Hz - 240 VAC/60Hz

(5) Performance are guaranteed only using valves completed with BFP coil

VALVES IN ACCORDANCE WITH ATEX 94/9/CE DIRECTIVE

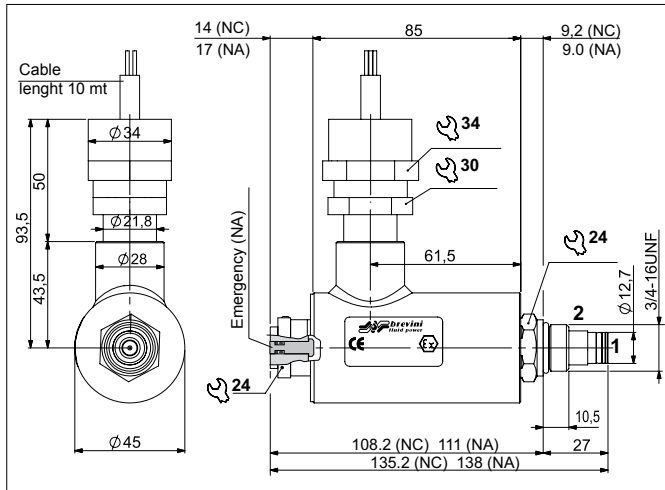

The CRP04X series of valves are electrically-controlled, 2-way / 2-position directional valves, available in 12V and 24V versions. The "2" to "1" seal is guaranteed by a tapered shutter.

Available in normally open (NA) or normally closed (NC) versions.

- NA, free passage (from "2" to "1") with de-energised coil
- NC, free passage (from "2" to "1") with energised coil or "1" to "2" with de-energised coil


The valves work with the coils in DC.

These coils have separate certification marking II 2 GD Ex d IIC T6/T85°C. The coils are supplied with a three-pole lead whose wires have a section of at least 1.5 mm², length 10 mt.


Operating intermittence: ED100% if the room temperature does not exceed 40 °C. Degree of protection: IP67 according to EN 60529.

Supply voltage: must not exceed +5% / -10% of the nominal value. The sleeves are made of steel with galvanised surface protection (NC) or burnishing and nichel-plating (NA).

HYDRAULIC SYMBOLS



Normally open




Normally closed

The CRP04X series of valves are Group II equipment, for use in areas classed for the presence of gas (category 2 G) and combustible dust (category 2 D). They are designed and manufactured according to the ATEX 94/9/EC directive, according to European standards: EN 1127-1, EN 13463-1, EN 13463-5.

The fluids used are hydraulic fluids for oil-pressure applications, such as: mineral oils, water-glycol solutions, biocompatible oils, etc.. whose viscosity ranges between 10 and 500 mm² / s.


The coil used for the CRP04X series is certified for a room temperature range of -20 °C / + 40 °C; it is used with fluid temperatures up to +40 °C.

PRESSURE DROPS

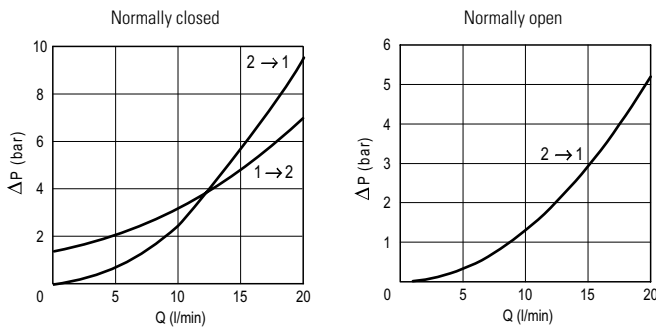

1 → 2 Only with coil not energised

LIMITS OF USE

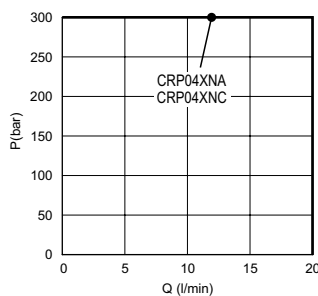

FEATURES


Max. pressure	300 bar
Max. Flow	20 l/min
Max. Leakage (0 ÷ 10 drops/min)	0 ÷ 0.5 cm ³ /min
Max. excitation frequency	2 Hz
Duty cycle	100% ED
Hydraulic fluids	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-20 ÷ +40 °C
Ambient temperature	-20 ÷ +40 °C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Cartridge filter	280µm
Coil power	7 W
Supply tolerance	-5 ÷ +10 %
Type of protection (in relation to the connection used)	IP67
Weight (with coil)	1.29 kg
Cartridge tightening torque	25 ÷ 30 Nm (2.5 ÷ 3 kgm)
Coil ring nut tightening torque	6 Nm (0.6 kgm)
Cavity (3/4 - 16 UNF)	CD018006

The tests were carried out with the solenoids at operating temperature, with a supply voltage 10% below nominal value and with a 40°C fluid temperature. The fluid used is a mineral oil with viscosity of 46 mm²/s at 40°C.

REGISTERED MARK AND IDENTIFICATION PLATE


Every moduls are supply with its "Identification Plate" and with the "Declaration of Conformity" in accordance with the 94/4/CE Atex Directive.

The identification plate shows the most important technical performance and constructive specifications so it has to be always integral and visible.

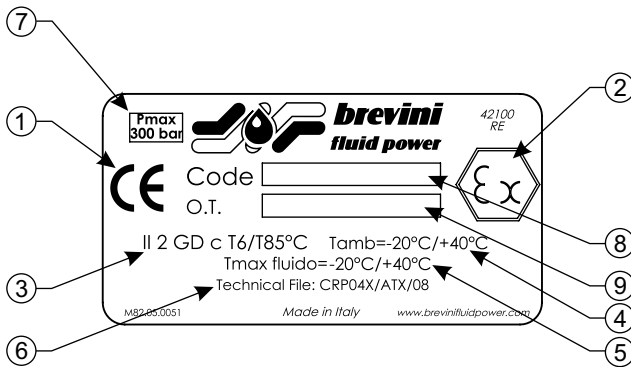

1	CE	In accordance with Europe Directive
2	Ex	In accordance with Atex 94/9/CE Directive
3	II 2 GD c T6/T85°C	Explosive atmosphere which is comprised of gas, vapours or mist
4	Tamb = -20°C ÷ +40°C	Operating ambient temperature
5	Tmax fluid = -20°C ÷ +40°C	Operating fluid temperature
6	CRP04X/ATX/08	Reference of the Technical issue put down at the Notifying Body
7	P max = 300 bar	Max. operating pressure
8	Code	Orediering code (10 characters printed)
9	O.T.	Technical ordering code (printed)

ORDERING CODE

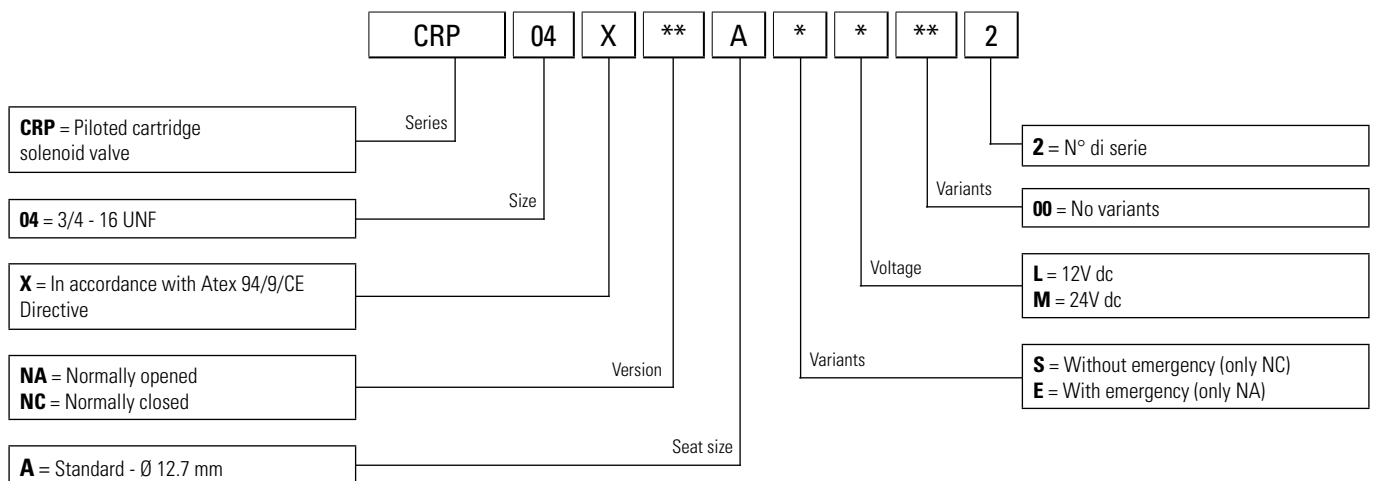

SAFETY INSTRUCTIONS

Carefully read everything reported in the instruction sheet attached to the valves, before installation. All maintenance operations must be performed according to the manual.

The CRP04X series valves must be installed and maintained in compliance with plant and maintenance regulations for environments classified against the risk of explosion because of presence of gas (for example: EN 60079-14, EN 60079-17 or other national regulations/standards).

The valves must be connected to earth using the special anti-loosening and anti-rotation connection element.

For all safety aspects tied to the use of the coil see the relative use and maintenance instructions. The electrical appliances/components must not be opened when live.

The user must periodically control, depending on the conditions of use and the substances used, the presence of deposits, cleaning, wear and correct functioning of the valves.

All installation and maintenance interventions must be performed by qualified staff.

INSTRUCTIONS FOR A CORRECT INSTALLATION

Carry out wiring of the solenoids according to the user instructions of the relative coils (a copy is always supplied with each solenoid).

- The valves must be connected to earth using the special anti-loosening and anti-

rotation connection element.

- When mounting the valve onto the base (manifold) ensure not to damage the OR sealing rings on the surface.
- For the aspects tied to the installation of the solenoids, see the relative safety instructions. The electrical components must not be opened when live.
- If it is necessary to loosen the ring nuts on the external ends of the coil to opportunely position the cable-holders, they must be tightened again to the respective tightening torques.

INSTRUCTIONS FOR A CORRECT USE AND MAINTENANCE

USE

- Respect functional limits indicated in the technical features section and those, where restrictive, indicated in the solenoid safety instructions.
- The oil used must be within the types envisioned by the manufacturer and its contamination level must be maintained within the indicated limits.

MAINTENANCE

- The user must periodically control, depending on the conditions of use and the substances used, the presence of deposits, cleaning, wear and correct functioning of the valves.
- If the OR sealing rings are damaged, only replace them with those specifically supplied by the manufacturer.

DIRECT OPERATED SOLENOID VALVE

Variants

CRD 04 18 NC ...
18W coil version

Variants

CRD 04 22 NC ...
22W coil version

Variants

CRD 04 NC ...
30W coil version

Flux	Emergency Force (F)
2 → 1	10N
1 → 2	10 + (2,5 x p) N

p = used pressure (bar)

00012025 Spare seals kit

The direct acting, normally closed 2-way 2 position bi-directional electric control valve releases pressure and enables fluid to flow through the valve in both directions.

The bi-directional tapered poppet is in tempered and ground steel.

The valves work with DC coils whereas RAC coils with a connector with incorporated rectifier must be used for AC applications.

CRD0418NC - CRD0422NC: nickel-plated steel sleeve.

CRD04NC: phosphate-coating steel sleeve.

FEATURES

Max. pressure - see note (*)	CRD 04 22 NC = 300 bar CRD 04 18 NC = 210 bar CRD 04 NC = 250 bar
Max. Flow	CRD 04 22 NC /18 NC = 15 l/min CRD 04 NC = 30 l/min
Max. excitation frequency	2 Hz
Duty cycle	100% ED
Max. Leakage (0 ÷ 20 drops/min)	0 ÷ 1 cm ³ /min
Hydraulic fluids	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Cartridge filter	280µm
Type of protection (in relation to the connection used)	IP65
Weight (with coil)	CRD 04 18 NC = 0.27 kg CRD 04 22 NC = 0.35 kg CRD 04 NC = 0.63 kg
Cartridge tightening torque	25 ÷ 30 Nm
Coil ring nut tightening torque Emergency tightening torque	7 Nm
Cavity standard "A" (3/4 - 16 UNF)	CD018006 (See section 15)
Cavity with reduction "B" (3/4 - 16 UNF)	CD018012 (See section 15)

HYDRAULIC SYMBOLS

Reduction for cavity type "B"

V89B30000 Spare code

*** Max. pressure with reduction:**
Unidirectional 2 → 1 = 300 bar
Bidirectional 2 → 1 and 1 → 2 = 210 bar

Connector to be ordered separately, see sect. 18

IE/CRD04/003/2014

CAT: BFP/VCAR Page: 76

SHEET: 1/2

SOLENOID VALVES - 2-WAY

8

HOME


INFO

VALVES INDEX

PRESSURE DROPS


18W / 22W

A = 2 → 1
B = 1 → 2

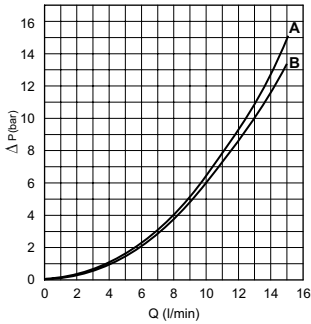

30W


G = 2 → 1
H = 1 → 2

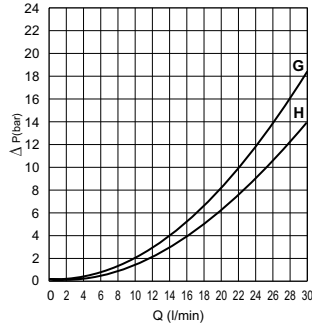

LIMITS OF USE


22W

C = 2 → 1
D = 1 → 2

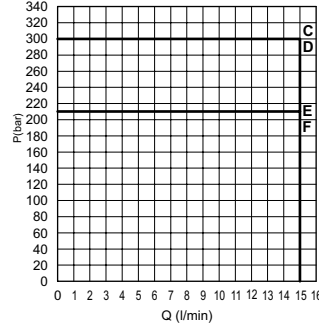

18W

E = 2 → 1
F = 1 → 2

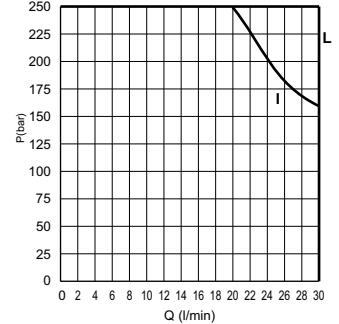

30W


I = 2 → 1
L = 1 → 2

The tests were carried out with the solenoids at operating temperature, with a supply voltage 10% below nominal value and with a 40°C fluid temperature. The fluid used is a mineral oil with viscosity of 46 mm²/s at 40°C.

ORDERING CODE

	CRD	04	**	NC	*	*	*	**	*															
	Series	Size	Coil	Version	Seat size	Version	Voltage	Variants																
CRD = Direct operated solenoid valve		04 = 3/4 - 16 UNF	18 = 18W (C30) 22 = 22W (C36) 00 = Without coil (7)	NC = Normally closed	A = Standard - Ø 12.7 mm B = With reduction - Ø 15.9 mm	E = With emergency		00 = No variants E1 = Manual emergency (30W) P1 = Rotary emergency (30W) P3 = Rotary emergency (18W/22W) P4 = Push button Emergency with removable protection E9 = Push button Emergency direct control FY = Emergency P3 + FH (18W/22W) FH = Cartridge filter PJ = FH + P4 emergency FK = With flying leads 600 mm (1) AJ = AMP Junior connection (2) CX = Deutsch connection with bidirectional diode (3)	2 = Serial No. CRD 04 18 NC.. CRD 04 22 NC.. CRD 04 00 NC.. 1 = Serial No. CRD 04 NC..															
Omit for 30W version (D12)								Connector to be ordered separately, see sect. 18																
							<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 50%;">DC 18W/22W (C30-C36)</th> <th style="width: 50%;">DC 30W (D12)</th> </tr> <tr> <td>L = 12 VDC</td> <td>L = 12 VDC</td> </tr> <tr> <td>M = 24 VDC</td> <td>M = 24 VDC</td> </tr> <tr> <td>N = 48 VDC</td> <td>W = Without coil (7)</td> </tr> <tr> <td>2 = 21.6 VDC RAC (4)</td> <td></td> </tr> <tr> <td>Z = 102 VDC RAC (5)</td> <td></td> </tr> <tr> <td>X = 205 VDC RAC (6)</td> <td></td> </tr> <tr> <td>W = Without coil (7)</td> <td></td> </tr> </table>	DC 18W/22W (C30-C36)	DC 30W (D12)	L = 12 VDC	L = 12 VDC	M = 24 VDC	M = 24 VDC	N = 48 VDC	W = Without coil (7)	2 = 21.6 VDC RAC (4)		Z = 102 VDC RAC (5)		X = 205 VDC RAC (6)		W = Without coil (7)		
DC 18W/22W (C30-C36)	DC 30W (D12)																							
L = 12 VDC	L = 12 VDC																							
M = 24 VDC	M = 24 VDC																							
N = 48 VDC	W = Without coil (7)																							
2 = 21.6 VDC RAC (4)																								
Z = 102 VDC RAC (5)																								
X = 205 VDC RAC (6)																								
W = Without coil (7)																								
								Coils technical data, see sect. 17																
(1) Only voltages 12 VDC - 24 VDC and coils 18W/22W (2) Only voltages 12 VDC - 24 VDC and coil 22W (3) Only voltages 12 VDC - 24 VDC and coil 18W (4) With rectifier: 24 VAC/50-60Hz					(5) With rectifier: 115 VAC/50Hz - 120 VAC/60Hz (6) With rectifier: 230 VAC/50Hz - 240 VAC/60Hz (7) Performance are guaranteed only using valves completed with BFP coil																			

SOLENOID VALVES 2 WAY 2 POSITIONS

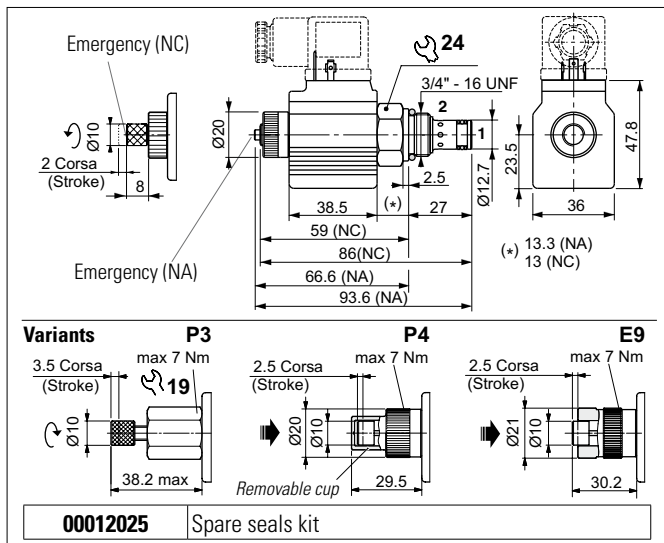



The electric valve is a 2-way 2-position bidirectional electrically controlled valve. Slight leakage is tolerated for this type of valve. Available in normally open (NA) or normally closed (NC) versions. The valves work with DC coils whereas RAC coils with a connector with incorporated rectifier must be used for AC applications. The sleeve is in galvanised steel (C2V0422NC..) or nickel-plated (C2V0422NA..). The plunger is in tempered and ground steel.

FEATURES


Max. pressure	250 bar
Max. Flow	12 l/min
Max. excitation frequency	2 Hz
Duty cycle	100% ED
Hydraulic fluids	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Type of protection (in relation to the connection used)	IP65
Weight (with coil)	0.30 kg
Cartridge tightening torque	25 ÷ 30 Nm
Coil ring nut tightening torque	7 Nm
Cavity (3/4 - 16 UNF)	CD018006 (See section 15)

Connector to be ordered separately, see sect. 18


HYDRAULIC SYMBOLS



PRESSURE DROPS

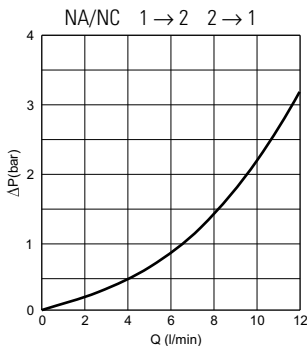

LIMIT OF USE

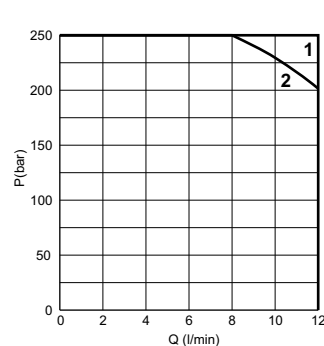

Limits of use

Flow	C2V04 NA	C2V04 NC
1 → 2	Curve 2	Curve 1
2 → 1	Curve 1	Curve 1

The tests were carried out with the 22W solenoids at operating temperature, with a supply voltage 10% below nominal valve and with a 40°C fluid temperature. The fluid used is a mineral oil with viscosity of 46 mm²/s at 40°C.

ORDERING CODE


C2V = Solenoid valve 3 way / 2 positions	Series	04 = 3/4 - 16 UNF	Size	22 = 22W (C36)	Coil	**	Version	A = Ø 12.7 mm (standard)	Seat	*	Emergency	*	00 = No variants	E9 = Push butt. emerg.(..NA)
NC = Normally closed NA = Normally open													P3 = Rotary emerg.(..NA)	FK = With flying leads 600 mm (1)
S = Without emergency (NC) E = With emergency (NA - NC)													P4 = Push butt. emerg.(..NA)	AJ = AMP Junior connection (1)
													Connector to be ordered separately, see sect. 18	
													DC 22W (C36)	
													L = 12 VDC	Z = 102 VDC RAC (3)
													M = 24 VDC	X = 205 VDC RAC (4)
													N = 48 VDC	W = Without coil (5)

Coils technical data, see sect. 17


(1) Only voltages 12 VDC - 24 VDC
(2) With rectifier: 24 VAC/50-60Hz
(3) With rectifier: 115 VAC/50Hz - 120 VAC/60Hz

(4) With rectifier: 230 VAC/50Hz - 240 VAC/60Hz
(5) Performance are guaranteed only using valves completed with BFP coil

SOLENOID VALVES 3-4 WAY

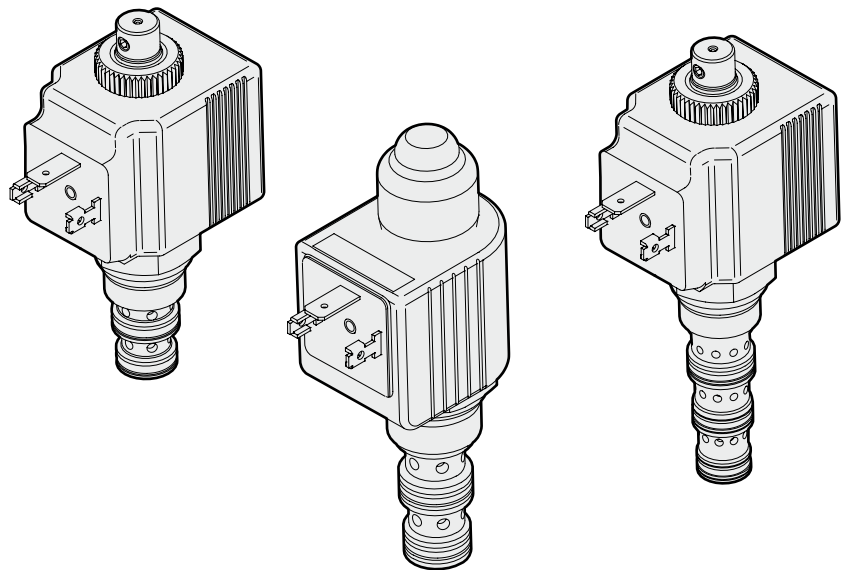


SOLENOID VALVES 3-WAY/2-POSITION

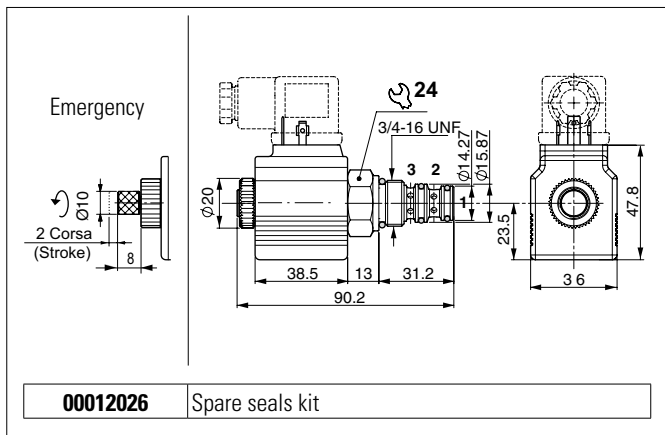


Connector to be ordered separately, see sect. 18


HYDRAULIC SYMBOL



PRESSURE DROPS

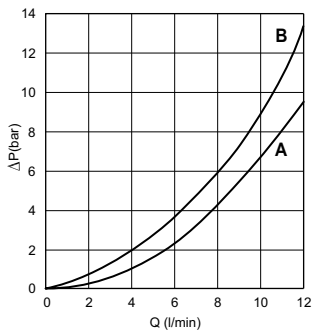

LIMIT OF USE

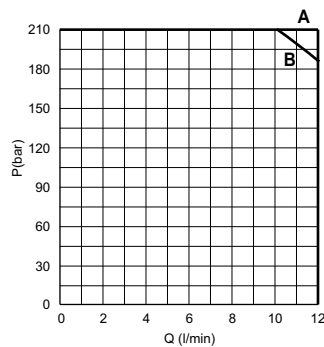

The electric valve is a 3-way 2-position directional electrically controlled valve.

Slight leakage is tolerated for this type of valve.

The valves work with DC coils whereas RAC coils with a connector with incorporated rectifier must be used for AC applications.

The sleeve is in galvanised steel. The plunger is in tempered and ground steel.

HYDRAULIC FEATURES

Max. working pressure	210 bar
Max. Flow	12 l/min
Max. excitation frequency	2 Hz
Duty cycle	100% ED
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Type of protection (in relation to the connector used)	IP 65
Weight	0.30 kg
Cartridge tightening torque	25 ÷ 30 Nm
Coil ring nut tightening torque	7 Nm
Cavity (3/4 - 16 UNF)	CD018005 (See section 15)

Flow	Pressure drops	Limit of use
1 → 2	A	A
2 → 1	A	A
2 → 3	B	B
3 → 2	B	B

Curve

The tests were carried out with the 22W solenoids at operating temperature, with a supply voltage 10% below nominal value and with a 40°C fluid temperature.

The fluid used is a mineral oil with viscosity of 46 mm²/s at 40°C.

ORDERING CODE

C3V = Solenoid valve 3 way / 2 positions	Series	04 = 3/4 - 16 UNF	Size	22 = 22W (C36)	Coil	1C = Hydraulic schema	Schema	C = Seat	Seat type	*	Version	*	Voltage	**	Variants	2 = Serial No.
S = Without emergency		E = With emergency											DC 22W (C36)			
													L = 12 VDC	Z = 21.6 VDC RAC (2)		
													M = 24 VDC	X = 102 VDC RAC (3)		
													N = 48 VDC	W = Without coil (5)		

Connector to be ordered separately, see sect. 18

Coils technical data, see sect. 17

(1) Only voltages 12 VDC - 24 VDC


(2) With rectifier: 24 VAC/50-60Hz

(3) With rectifier: 115 VAC/50Hz - 120 VAC/60Hz

(4) With rectifier: 230 VAC/50Hz - 240 VAC/60Hz


(5) Performance are guaranteed only using valves completed with BFP coil

SOLENOID VALVES 3-WAY/2-POSITION

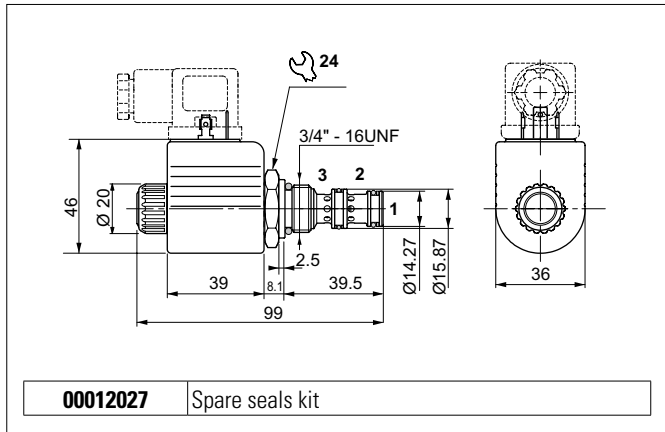


Connector to be ordered separately, see sect. 18


HYDRAULIC SYMBOL



PRESSURE DROPS

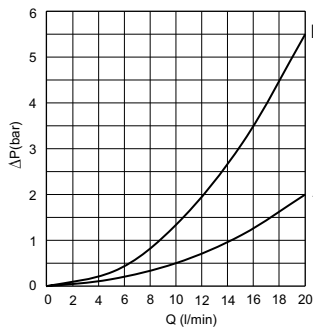

LIMIT OF USE

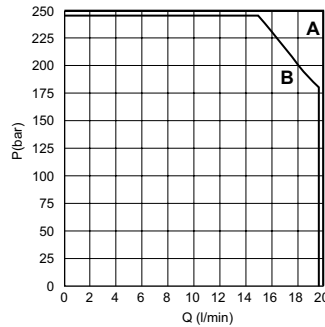

The electric valve is a 3-way 2-position directional electrically controlled valve.

Slight leakage is tolerated for this type of valve.

The valves work with DC coils whereas RAC coils with a connector with incorporated rectifier must be used for AC applications.

The sleeve is in phosphate steel. The plunger is in tempered and ground steel.

HYDRAULIC FEATURES

Max. working pressure	250 bar
Max. Flow	20 l/min
Max. excitation frequency	2 Hz
Duty cycle	100% ED
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Type of protection (in relation to the connector used)	IP 65
Weight	0.30 kg
Cartridge tightening torque	25 ÷ 30 Nm
Coil ring nut tightening torque	4.5 Nm
Cavity (3/4 - 16 UNF)	CD018003 (See section 15)

Flow	Pressure drops	Limit of use
2 → 1	A	A
2 → 3	B	A
3 → 2	B	B

Curve

The tests were carried out with the 27W solenoids at operating temperature, with a supply voltage 10% below nominal value and with a 40°C fluid temperature.

The fluid used is a mineral oil with viscosity of 46 mm²/s at 40°C.

ORDERING CODE

C3V 04 27 1D D S * ** 2

- C3V** = Solenoid valve 3 way / 2 positions (Series)
- 04** = 3/4 - 16 UNF (Size)
- 27** = 27W (A09) (Coil)
- 1D** = Hydraulic schema (Schema)
- D** = Seat (Seat type)
- S** = Without emergency (Version)
- *** = Variants
- **** = Variants
- 2** = Serial No.

Variants:

- 00** = No variants
- FL** = Coil with flying leads (250 mm) (1)
- LD** = Coil with flying leads (130 mm) and integrated diode (1)
- AJ** = AMP Junior coil (1)
- CX** = Deutsch coil and integrated diode (1)

Connector to be ordered separately, see sect. 18

DC 27W (A09)

L = 12 VDC	Z = 102 VDC RAC (2)
M = 24 VDC	X = 205 VDC RAC (3)
N = 48 VDC	W = Without coil (4)
P = 110 VDC	

Coils technical data, see sect. 17


(1) Only voltages 12 VDC - 24 VDC

(2) With rectifier: 115 VAC/50Hz - 120 VAC/60Hz

(3) With rectifier: 230 VAC/50Hz - 240 VAC/60Hz

(4) Performance are guaranteed only using valves completed with BFP coil

SOLENOID VALVES 3 WAY 2 POSITIONS

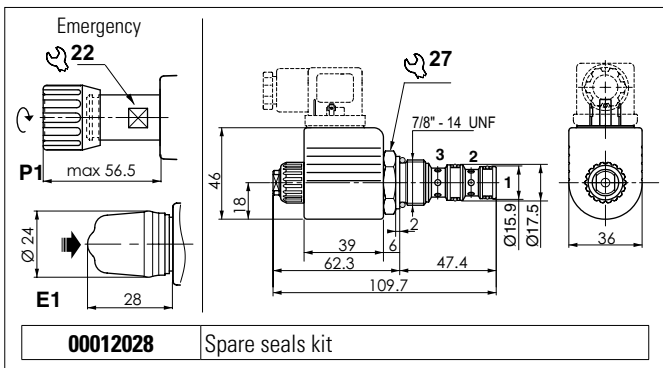


Connector to be ordered separately, see sect. 18

The electric valve is a 3-way 2-position directional electrically controlled valve.
Slight leakage is tolerated for this type of valve.
Available in 2 layouts.
The valves work with DC coils whereas RAC coils with a connector with incorporated rectifier must be used for AC applications.
The sleeve is in galvanised steel. The plunger is in tempered and ground steel.


HYDRAULIC FEATURES

Max. working pressure	250 bar
Max. Flow	20 l/min
Max. excitation frequency	2 Hz
Duty cycle	100% ED
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Type of protection (in relation to the connector used)	IP 65
Weight	0.37 kg
Cartridge tightening torque	45 ÷ 50 Nm
Emergency P1 tightening torque	6 ÷ 9 Nm
Coil ring nut tightening torque	4.5 Nm
Cavity (7/8 - 14 UNF)	CD019006 (See section 15)

SPOOL HYDRAULIC SCHEME




1D



1E


PRESSURE DROPS

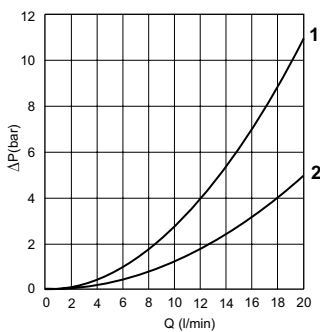

Spool type	Connections (pressure drops)					
	2→1	2→3	1→2	1→3	3→1	3→2
1D	2	1	—	—	—	1
1E	2	—	2	1	1	—

Curve No.

LIMIT OF USE

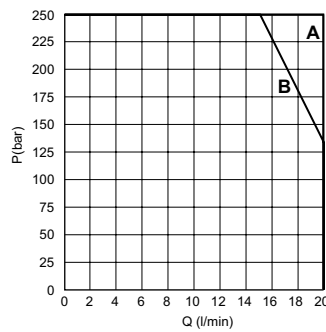

Spool type	Connections (limits of use)					
	2→1	2→3	1→2	1→3	3→1	3→2
1D	A	A	—	—	—	B
1E	A	—	B	B	A	—

Curve No.

The tests were carried out with the solenoids at operating temperature, with a supply voltage 10% below nominal value and with a 40°C fluid temperature.
The fluid used is a mineral oil with viscosity of 46 mm²/s at 40°C.

ORDERING CODE

C3V 03 ** E * * ** 1

- C3V** = Solenoid valve 3 way / 2 positions (Series)
- 03** = 27W Coil (A09) (Coil)
- **** = See "Spool scheme" (Spool)
- E** = Seat (Seat type)
- *** = Connection type
- *** = Voltage
- **** = Variants
- 1** = Serial No.

00 = No variants
E1 = Emergency button
P1 = Rotary emergency button

Connector to be ordered separately, see sect. 18

DC 27W (A09)

- L** = 12 VDC
- M** = 24 VDC
- N** = 48 VDC
- P** = 110 VDC
- Z** = 102 VDC RAC (2)
- X** = 205 VDC RAC (3)
- W** = Without coil (4)

Coils technical data, see sect. 17


(1) Only voltages 12 VDC - 24 VDC

(2) With rectifier: 115 VAC/50Hz - 120 VAC/60Hz

(3) With rectifier: 230 VAC/50Hz - 240 VAC/60Hz

(4) Performance are guaranteed only using valves completed with BFP coil

SOLENOID VALVES 4 WAY 2 POSITIONS

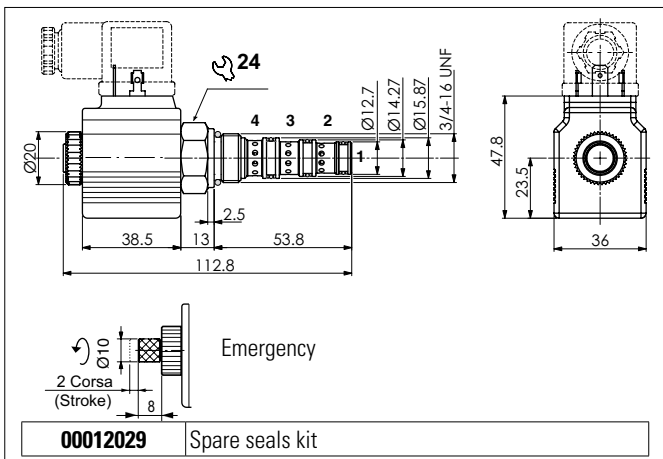


Connector to be ordered separately, see sect. 18

The electric valve is a 4-way 2-position directional electrically controlled valve.
Slight leakage is tolerated for this type of valve.
Available in 5 layouts.
The valves work with DC coils whereas RAC coils with a connector with incorporated rectifier must be used for AC applications.
The sleeve is in galvanised steel. The plunger is in tempered and ground steel.


HYDRAULIC FEATURES

Max. working pressure	250 bar
Max. Flow	18 l/min
Max. excitation frequency	2 Hz
Duty cycle	100% ED
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Type of protection (in relation to the connector used)	IP 65
Weight	0.34 kg
Cartridge tightening torque	25 ÷ 30 Nm
Emergency P1 tightening torque	7 Nm
Cavity (3/4 - 16 UNF)	CD018001 (See section 15)

PRESSURE DROPS

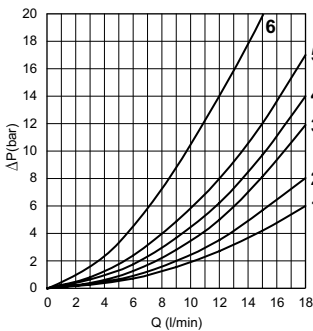

LIMIT OF USE

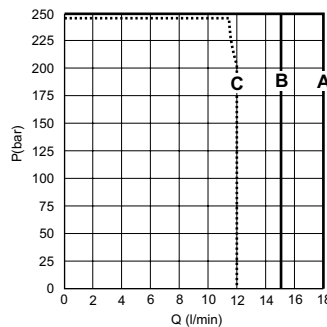


Spool type	Connections (pressure drops)			
	3→1	3→2	3→4	2→1
D	—	5	5	3
C	—	—	4	3
A	2	6	—	—
H	2	—	4	1
Y	—	—	5	3

Curve No.

Spool type	Limits of use - inlet flow port 3	
	Pressure in 2	Pressure in 4
D	A	A
C	A	A
A	B	C
H	—	A
Y	—	A


Curve No.

SPOOL SCHEME

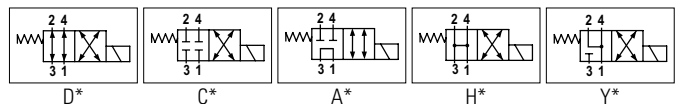

The tests were carried out with the solenoids 22W at operating temperature, with a supply voltage 10% below nominal value and with a 40°C fluid temperature.
The fluid used is a mineral oil with viscosity of 46 mm²/s at 40°C.

ORDERING CODE

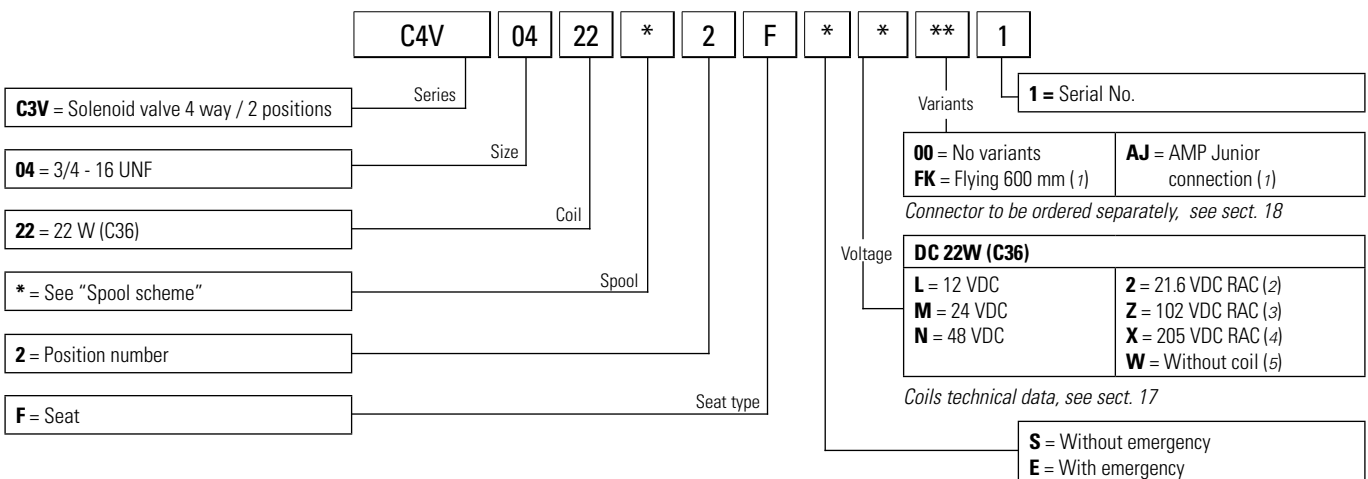

(1) Only voltages 12 VDC - 24 VDC


(2) With rectifier: 24Vac/50-60Hz

(3) With rectifier: 115Vac/50Hz - 120Vac/60Hz

(4) With rectifier: 230Vac/50Hz - 240Vac/60Hz

(5) Performance are guaranteed only using valves completed with BFP coil

SOLENOID VALVES 4 WAY 3 POSITIONS

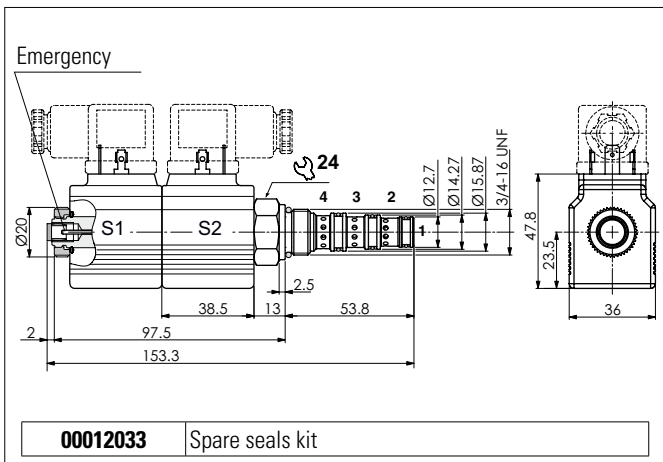


Connector to be ordered separately, see sect. 18

The electric valve is a 4-way 3-position directional electrically controlled valve.
Slight leakage is tolerated for this type of valve.
Available in 4 layouts.
The valves work with DC coils whereas RAC coils with a connector with incorporated rectifier must be used for AC applications.
The sleeve is in galvanised steel. The plunger is in tempered and ground steel.


HYDRAULIC FEATURES

Max. working pressure	250 bar
Max. Flow	18 l/min
Max. excitation frequency	2 Hz
Duty cycle	100% ED
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Type of protection (in relation to the connector used)	IP 65
Weight	0.34 kg
Cartridge tightening torque	25 ÷ 30 Nm
Emergency P1 tightening torque	7 Nm
Cavity (3/4 - 16 UNF)	CD018001 (See section 15)

PRESSURE DROPS

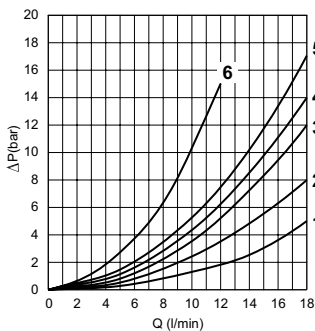

LIMIT OF USE

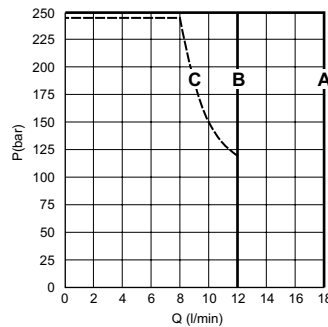


Spool type	Connections (pressure drops)				
	3→1	3→2	3→4	2→1	4→1
C	—	4	4	3	4
A	2	6	6	4	4
H	2	2	2	1	1
Y	—	5	5	3	4

Curve

Spool type	Connections (limits of use)				
	3→1	3→2	3→4	2→1	4→1
C	—	A	A	A	B
A	B	B	B	B	C
H	A	A	A	A	A
Y	—	A	A	A	A


Curve

SPOOL SCHEME

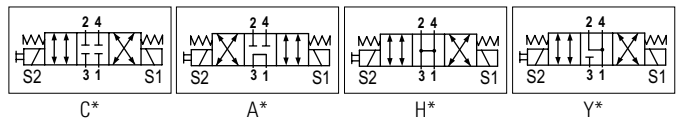

The tests were carried out with the solenoids 22W at operating temperature, with a supply voltage 10% below nominal value and with a 40°C fluid temperature.
The fluid used is a mineral oil with viscosity of 46 mm²/s at 40°C.

ORDERING CODE

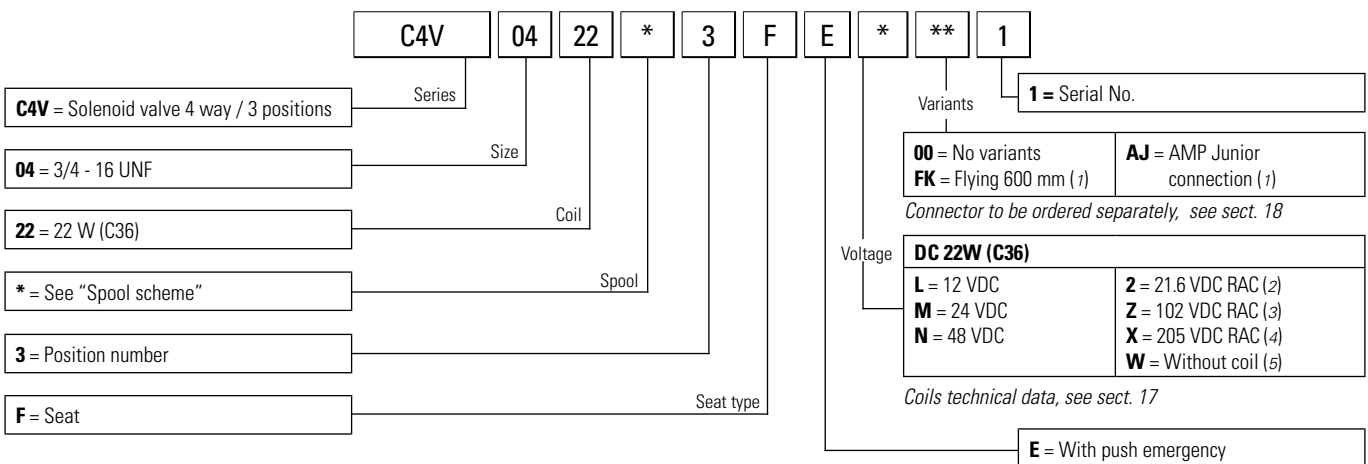

(1) Only voltages 12 VDC - 24 VDC


(2) With rectifier: 24VAC/50-60Hz

(3) With rectifier: 115VAC/50Hz - 120VAC/60Hz


(4) With rectifier: 230VAC/50Hz - 240VAC/60Hz

(5) Performance are guaranteed only using valves completed with BFP coil

DIVERTER VALVES

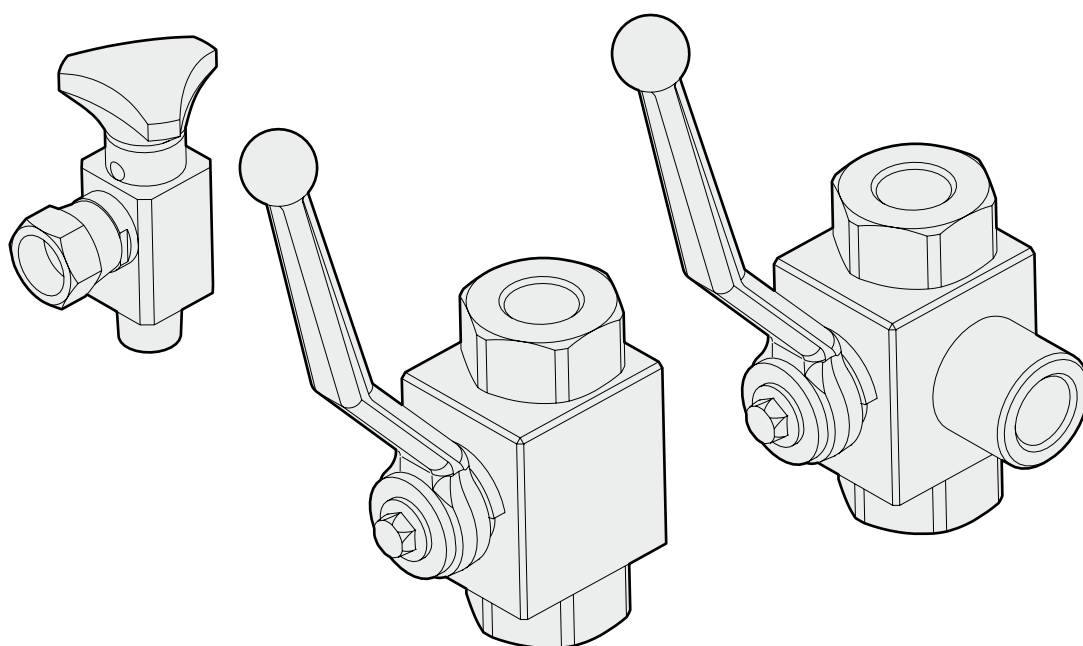

PRESSURE GAUGE SHUT-OFF - IN-LINE MOUNTING

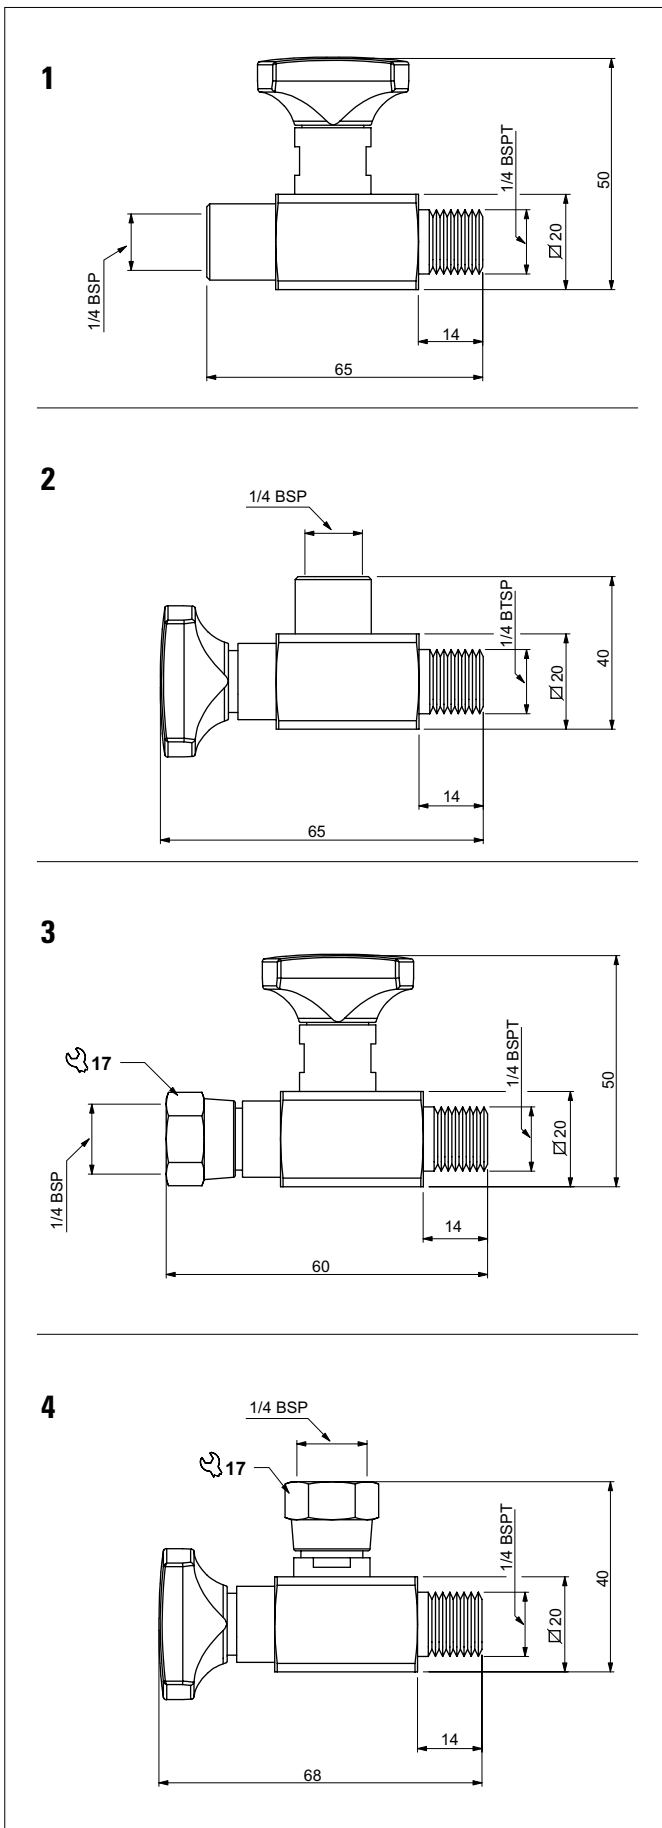


MR.7... in line - MRA.7... at 90°

This in-line mounting shut-off is completely steel made and allows for operating pressure of up to 400 bar. Its uses is essential to protect measuring gauge in the eventuality of fluid hammer.

MRG.7... in line with revolving nut MRAG.7... at 90° with revolving nut

This in-line mounting shut-off is completely steel made and allows for operating pressure of up to 400 bar. It has been designed to allow for independent mounting of the measuring gauge over a 360° angle, obviating in this way any problem relative to the gauge dimensions and mounting position. Its uses is essential to protect measuring gauge in the eventuality of fluid hammer.


HYDRAULIC SYMBOL



ORDERING CODE


Ref	Code	Description	Pressure max (bar)	Weight (kg)
1	MR7002	In line	400	0.115
2	MRA7002	At 90°	400	0.130
3	MRG7002	In line with revolving nut	400	0.120
4	MRAG7002	At 90° with revolving nut	400	0.135

HIGH PRESSURE - 2 WAY BALL VALVES - IN-LINE MOUNTING

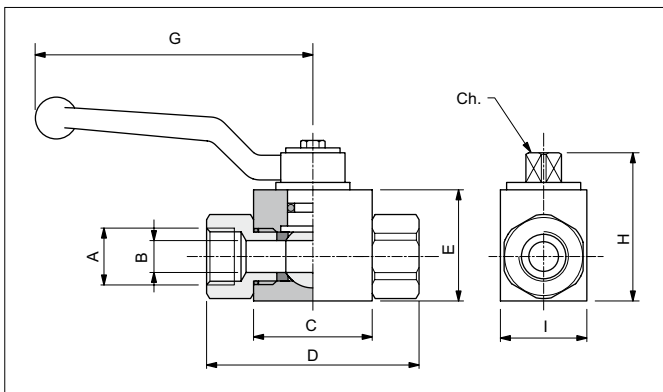

High pressure 2 way ball valves for in line mounting.
Steel body with external zinc plating. Cromed steel ball, aluminium lever.

HYDRAULIC SYMBOL




HYDRAULIC FEATURES


Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14

Code	Thread A	Flow max (l/min)	Pressure max (bar)	B (mm)	C (mm)	D (mm)	E (mm)	G (mm)	H (mm)	I (mm)	Ch (mm)	Weight (kg)
RBS502	1/8 BSP	5	500	4	42	71	35	110	49	30	9	0.50
RBS504	1/4 BSP	10	500	6	42	71	35	110	49	30	9	0.50
RBS506	3/8 BSP	25	500	10	44	73	40	110	54	35	9	0.65
RBS508	1/2 BSP	40	500	13	48	83	43	110	57	37	9	0.75
RBS512	3/4 BSP	100	400	20	62	95	55	180	73	45	14	1.40
RBS516	1 BSP	150	350	25	66	113	65	180	83	55	14	2.15
RBS520	1-1/4 BSP	150	350	25	66	121	65	180	83	55	14	2.25
RBS524	1-1/2 BSP	150	350	25	66	124	65	180	83	55	14	2.35

ORDERING CODE

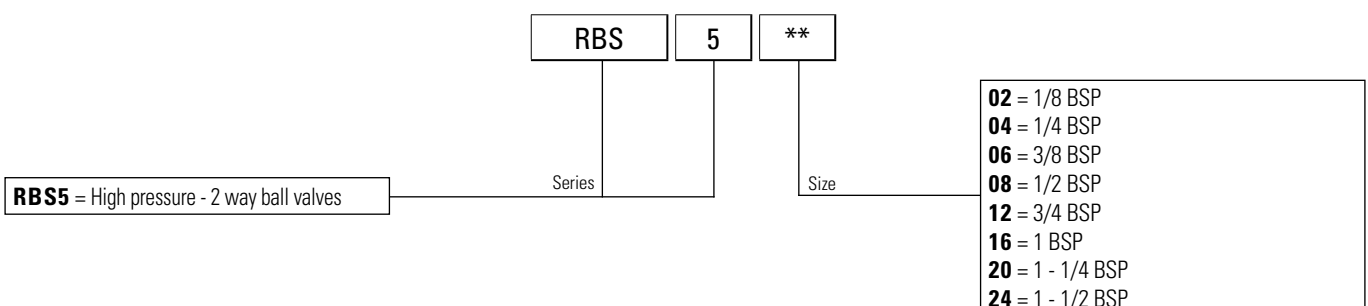

HIGH PRESSURE - 3 WAY BALL VALVES - IN-LINE MOUNTING

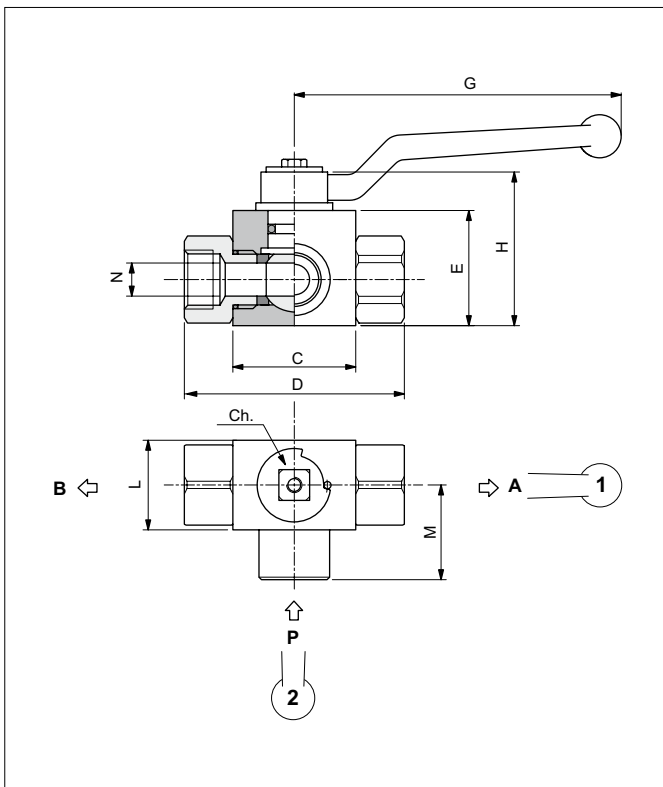


High pressure 3 way ball valves for in line mounting.
Steel body with external zinc plating. Cromed steel ball, aluminium lever.


HYDRAULIC FEATURES

Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14

HYDRAULIC SYMBOLS

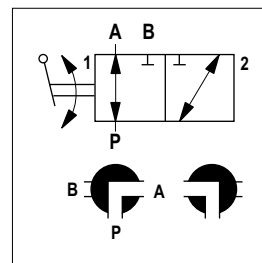


SCHEME "A"

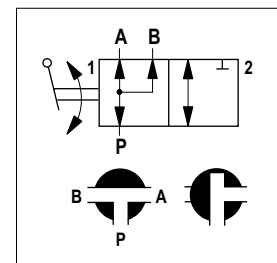


SCHEME "B"

Code	Thread A-B-P	Flow max (l/min)	Pressure max (bar)	C (mm)	D (mm)	E (mm)	G (mm)	H (mm)	L (mm)	M (mm)	N (mm)	Ch (mm)	Weight (kg)
BK3 A/B 02	1/8 BSP	5	400	42	71	35	110	49	30	33.5	4	9	0.50
BK3 A/B 04	1/4 BSP	10	400	42	71	35	110	49	30	33.5	6	9	0.50
BK3 A/B 06	3/8 BSP	25	400	44	73	40	110	54	35	37.0	10	9	0.70
BK3 A/B 08	1/2 BSP	70	350	48	83	43	110	57	37	40.0	13	9	0.80
BK3 A/B 12	3/4 BSP	100	350	62	95	55	180	73	45	52.0	20	14	1.50
BK3 A/B 16	1 BSP	150	350	66	113	65	180	83	55	60.0	25	14	2.35
BK3 A/B 20	1-1/4 BSP	150	350	66	121	65	180	83	55	61.5	25	14	2.50
BK3 A/B 24	1-1/2 BSP	150	350	66	124	65	180	83	55	61.5	25	14	2.70


ORDERING CODE

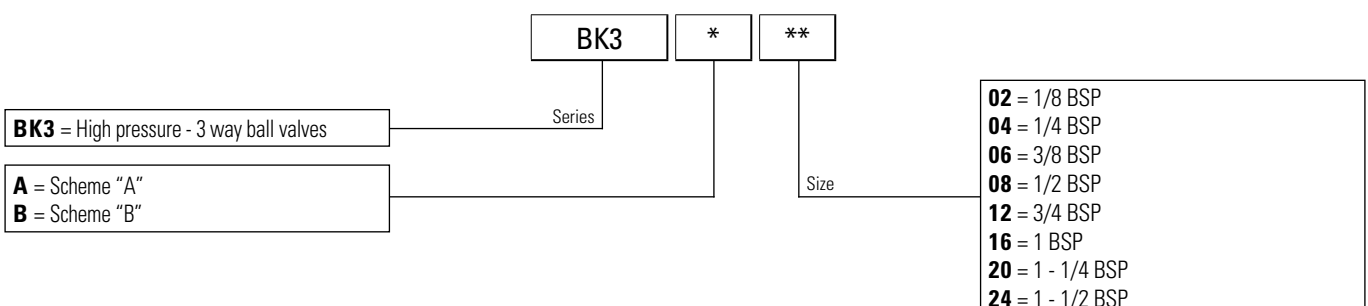

SOFT START VALVES

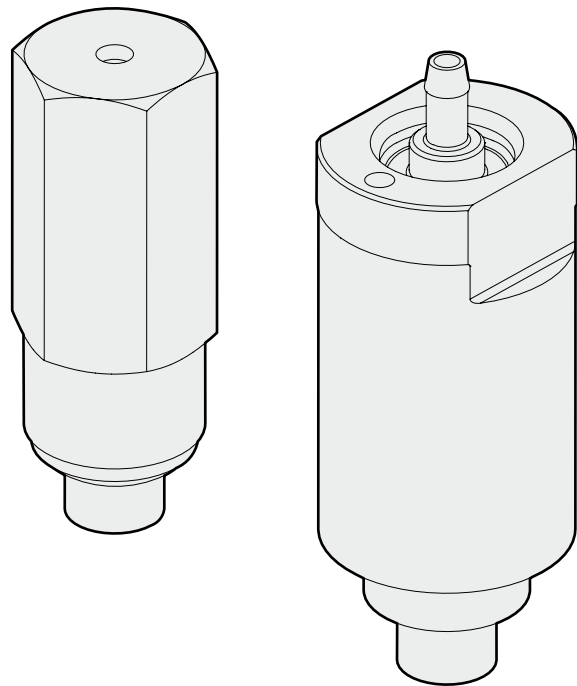


SINGLE-PHASE MOTOR START VALVE - IN-LINE MOUNTING

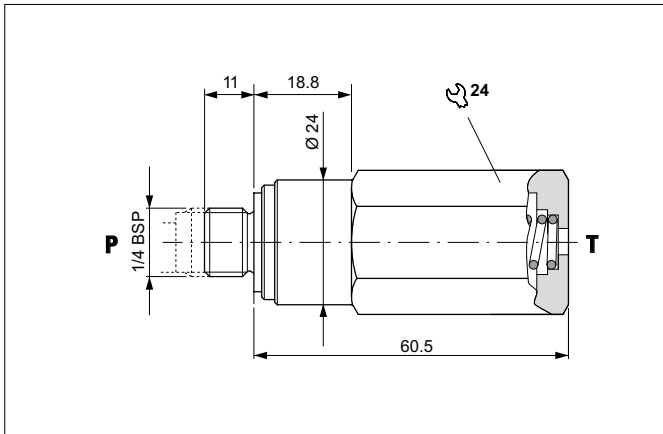

Valve used on power units to delay system pressurisation to allow a single-phase motor to reach the required speed.
 Fitted directly on the auxiliary pressure delivery line of unit 1 pumps or on the delivery branch between pump and unidirectional valve.
 The body is in steel and the tapered poppet in tempered and ground steel.


HYDRAULIC SYMBOL




HYDRAULIC FEATURES

Max. working pressure	300 bar
Max. Flow	20 l/min
Min. working pressure	15 bar
Max operating frequency (with manual operated)	1 Hz
Working Temperature	-25°C ÷ 60°C
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.14 kg
Tightening torque	25 ÷ 30 Nm

ORDERING CODE

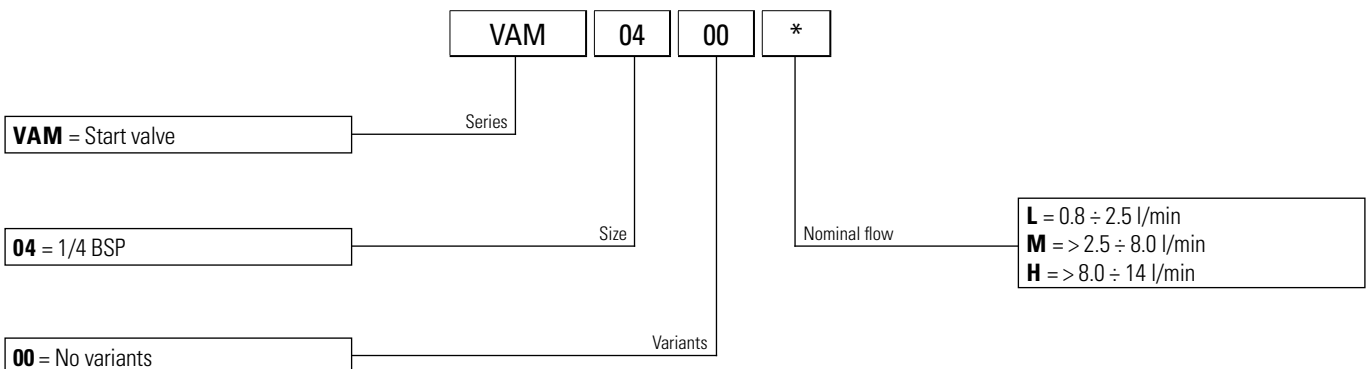

SOFT START VALVE - IN-LINE MOUNTING

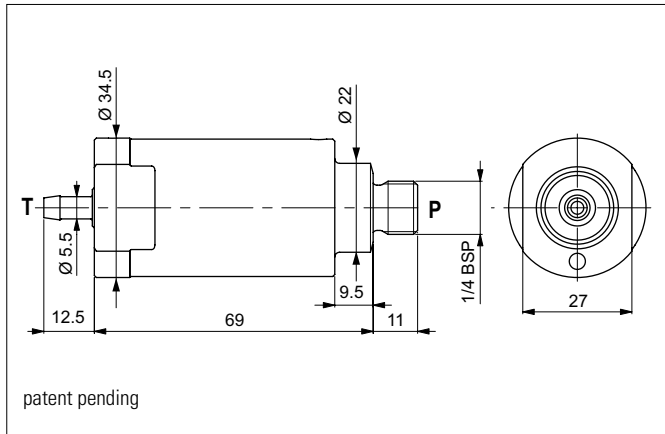


Valve used on power units to generate a flow rate ramp on the actuator to delay system pressurisation and allow the single phase motor to reach the required speed.

Fitted directly on the auxiliary pressure delivery line of unit 1 pumps or on the delivery branch between pump and unidirectional valve.

The body is in steel and the tapered poppet in tempered and ground steel.


HYDRAULIC SYMBOL

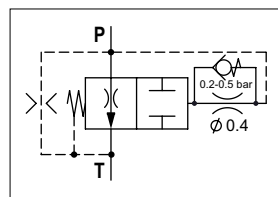

HYDRAULIC FEATURES


Max. working pressure	210 bar
Max. Flow	8 l/min
Ramp up time (at 100 bar of working pressure)	600 ms
Max. Leakage at 100 bar	0.8 l/min
Operating frequency	0.7 Hz
Working Temperature	-25°C ÷ 60°C
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.4 kg
Tightening torque	25 ÷ 30 Nm

PRESSURE DROPS

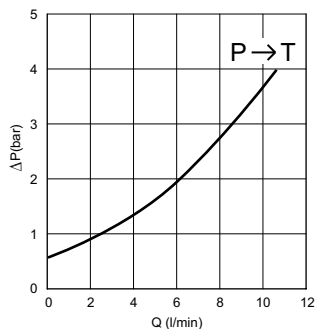


Fluid used: mineral based oil with viscosity 32 mm²/s at 40°C.


ORDERING CODE

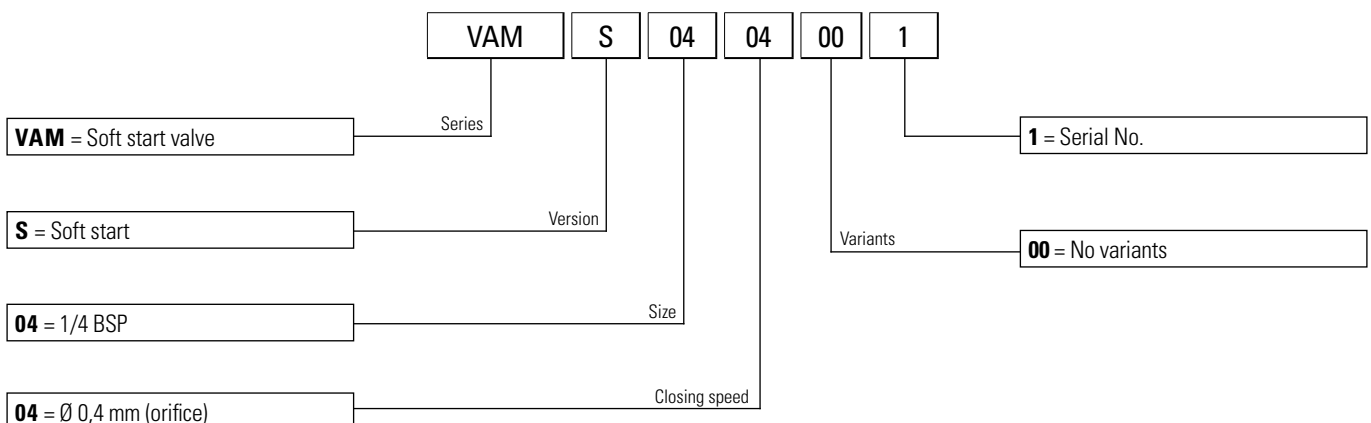

FLOW CONTROL VALVES

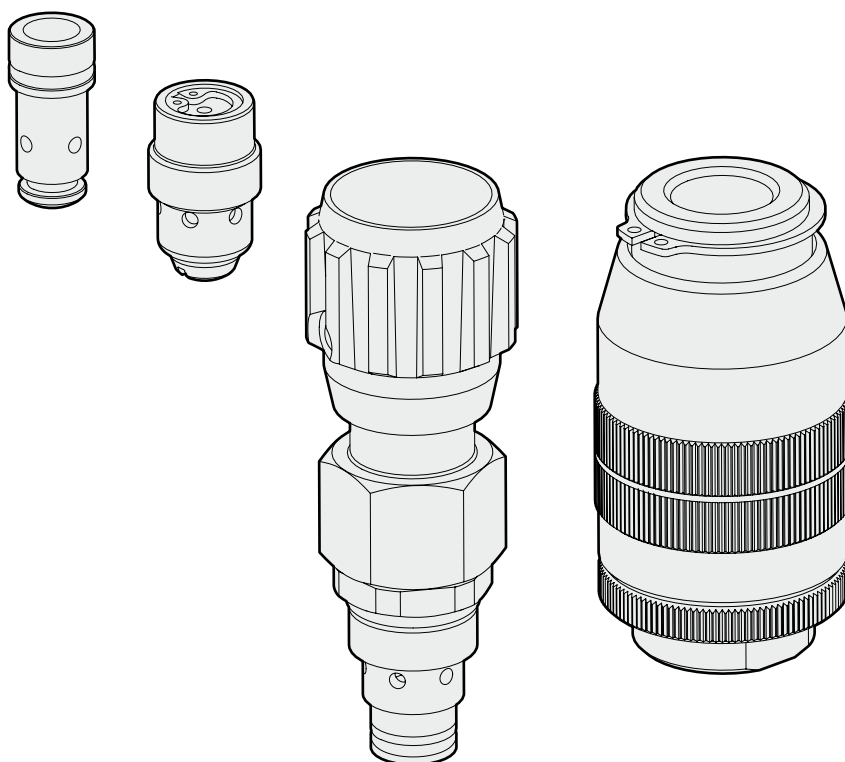

UNIDIRECTIONAL AND BIDIRECTIONAL FLOW CONTROL VALVES



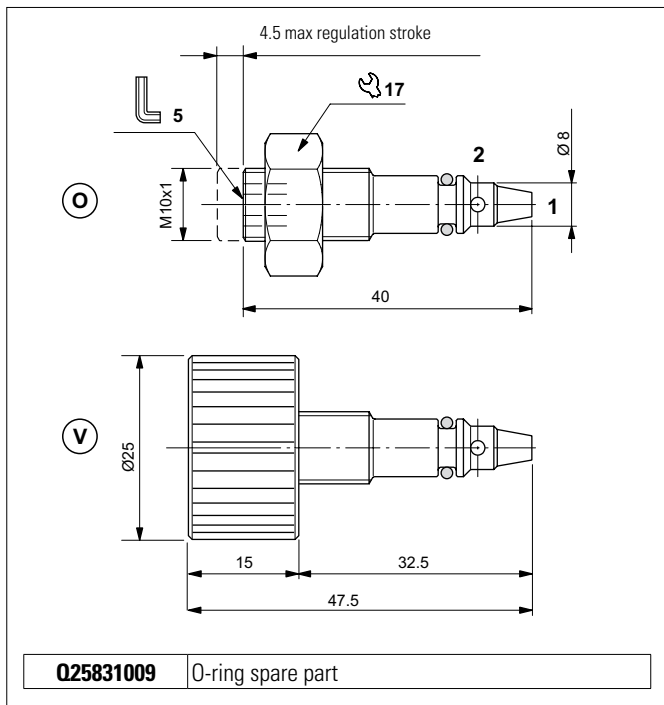


Flow control valve using non compensated throttling.
 The flow is reduced in one direction only, from 2 to 1, for SU valves and in both directions for SB valves.
 Guarantees excellent mechanical seal with negligible leakage.
 It has a galvanised steel body. The check valve guided ball poppet is in tempered and ground steel.



HYDRAULIC FEATURES

Max. working pressure	210 bar
Max. Flow	15 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.022 kg
Nut tightening torque	15 Nm
Cavity (M10x1)	CN019002 (See section 15)

HYDRAULIC SYMBOLS



PRESSURE DROPS

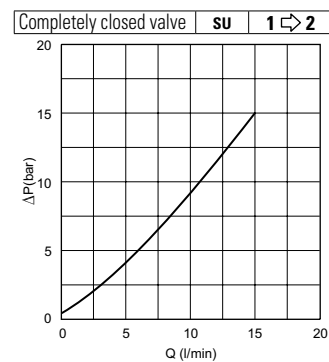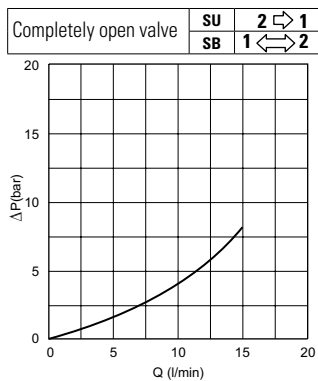

Fluid used: mineral based oil with viscosity 32 mm²/s at 40°C.

ORDERING CODE

S*	1010	0	*	1
Series	Size	Pressure	Variants	

SU = Unidirectional flow control valve
SB = Bidirectional flow control valve


1010 = M10x1

0 = Standard opening pressure 0.4 bar

1 = Serial No.

0 = Screw
V = Handwheel

FIXED UNIDIRECTIONAL FLOW CONTROL VALVE

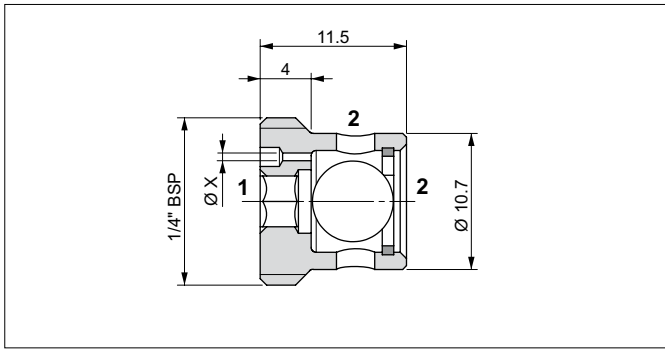


The valves control the flow in a single direction (2 to 1, the flow in opposite direction in free).
The flow is reduced by the control hole X which determines the flow rate (not compensated). Valves made steel.




HYDRAULIC FEATURES

Max. working pressure	210 bar
Max. Flow	20 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.022 kg
Tightening torque	16 ÷ 18 Nm

HYDRAULIC SYMBOL




PRESSURE DROPS

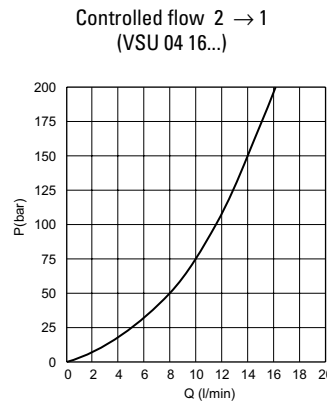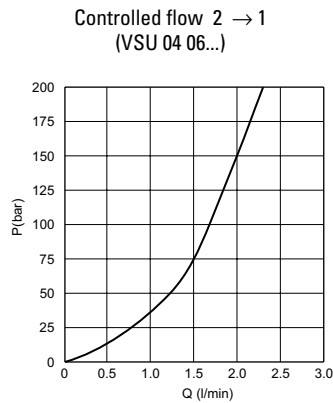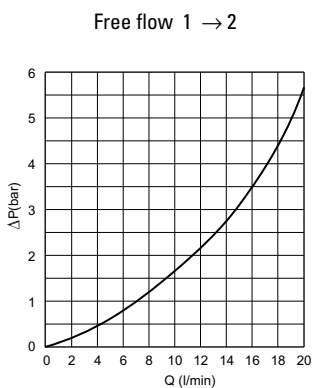


Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.


SEAL

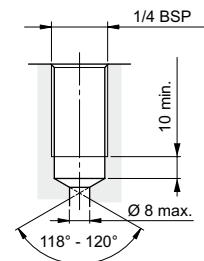


SERVICE EXAMPLE



ORDERING CODE

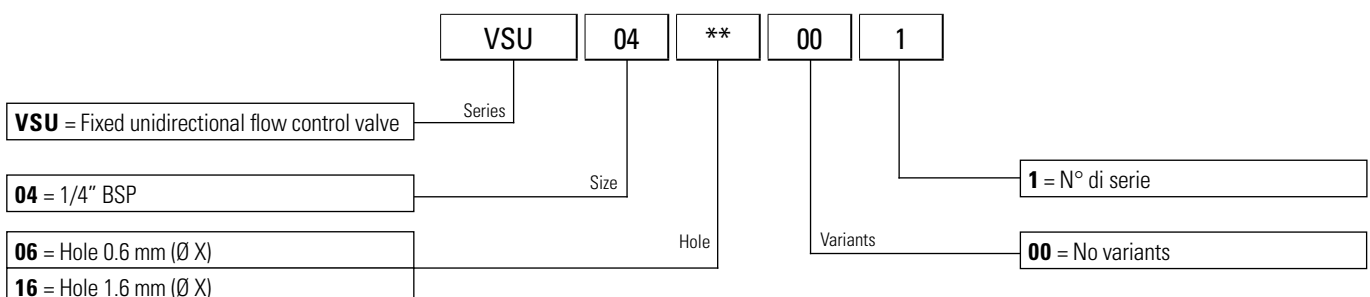

BIDIRECTIONAL FLOW CONTROL VALVE

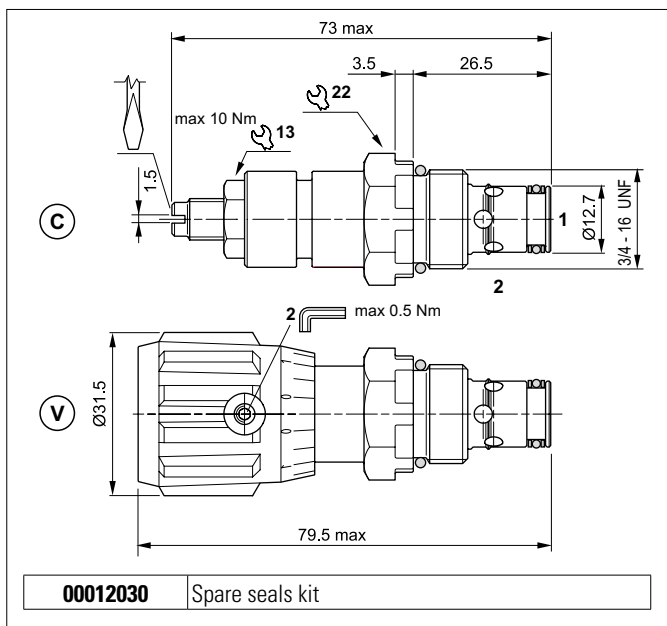


Flow control valve using non compensated throttling.
The flow is reduced in both directions, turning the screw or wheel right or left.
Guarantees excellent mechanical seal with negligible leakage.
It has a galvanised steel body.


HYDRAULIC FEATURES

Max. working pressure	315 bar
Max. Flow	40 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.11 kg
Tightening torque	25 ÷ 30 Nm
Cavity (3/4 - 16 UNF)	CD018006 (See section 15)

HYDRAULIC SYMBOL




PRESSURE DROPS

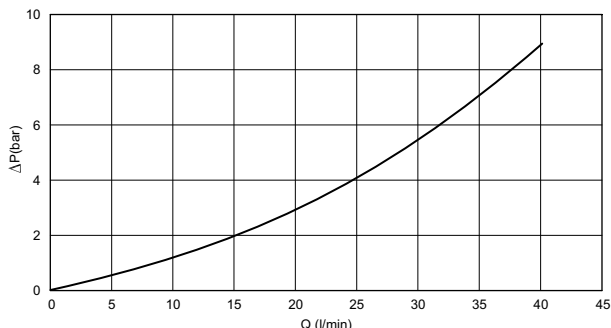


Fluid used: mineral based oil with viscosity 15 mm²/s at 40°C.

ORDERING CODE

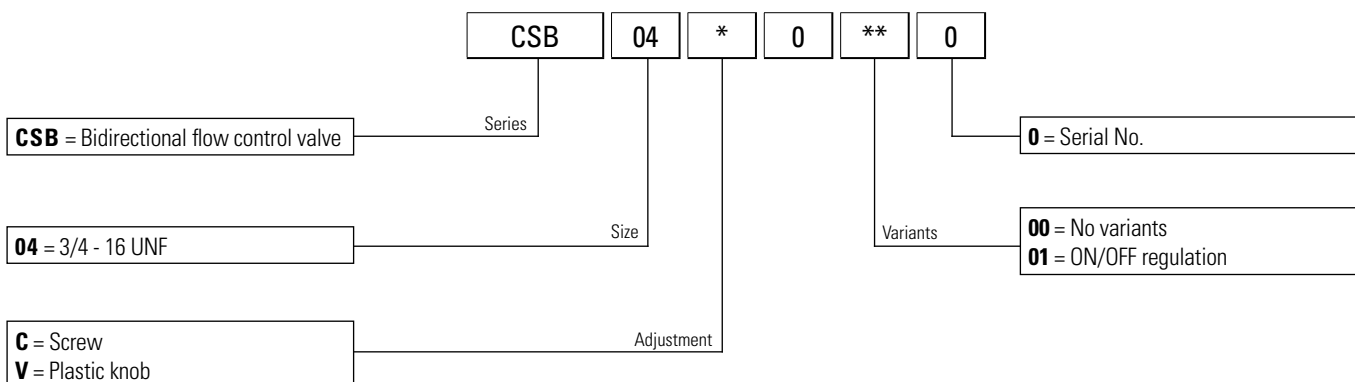

UNIDIRECTIONAL COMPENSATED FLOW CONTROL VALVES

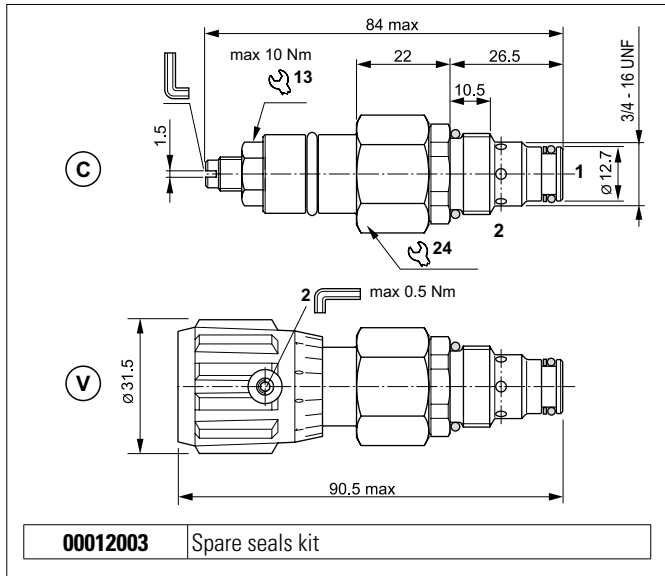

The flow control valve maintains a steady flow in a single direction (1 to 2) regardless of oil pressure.

The flow is reduced by turning the screw or wheel right or left.


Slight leakage is tolerated when the control screw or wheel is screwed down completely.

It has a galvanised steel body. The compensator plunger is in tempered and ground steel.

HYDRAULIC FEATURES


Max. working pressure	250 bar
ΔP of regulation	12.6 bar
Max. Flow	29 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.2 kg
Tightening torque	25 ÷ 30 Nm
Cavity (3/4 - 16 UNF)	CD018006 (See section 15)

HYDRAULIC SYMBOL




PRESSURE DROPS

Controlled flow 1 → 2

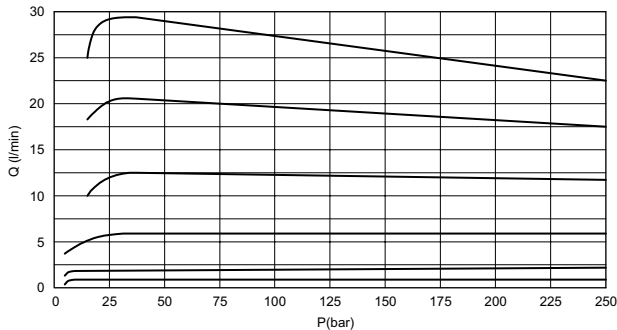


Fluid used: mineral based oil with viscosity 32 mm²/s at 40°C.

ORDERING CODE

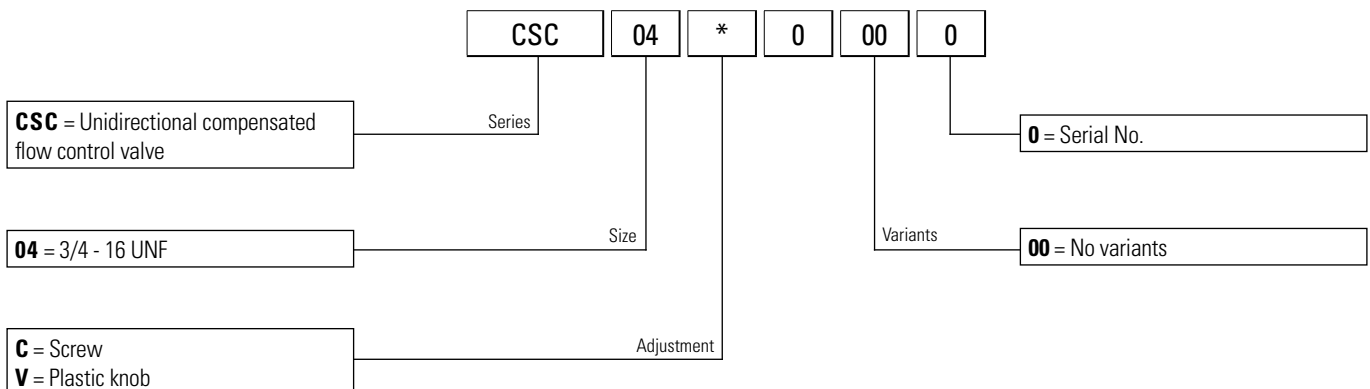

FIXED COMPENSATED FLOW CONTROL VALVE

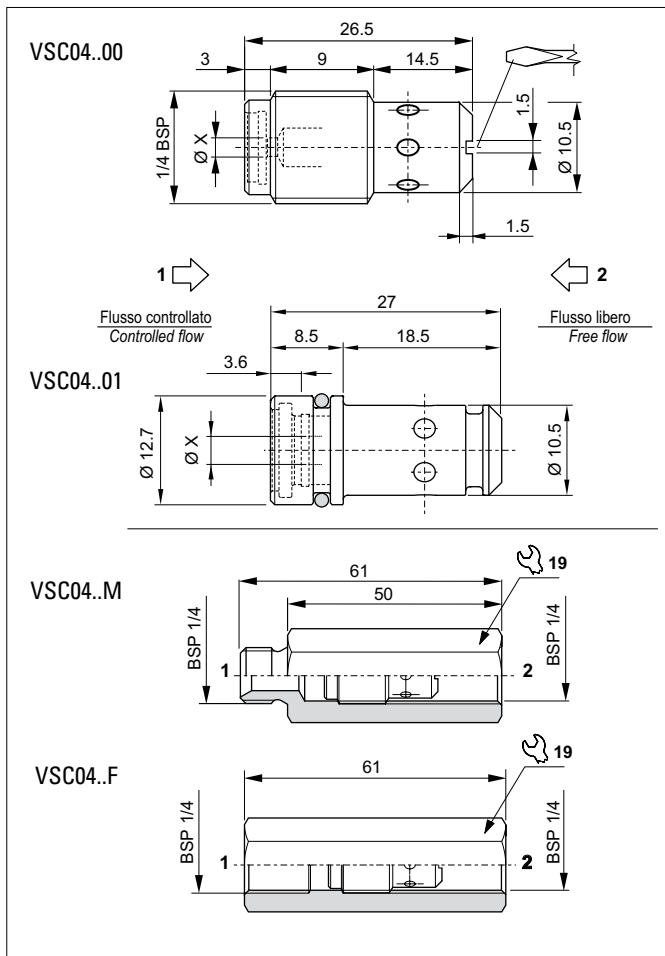


The flow control valve maintains a steady flow in a single direction (1 to 2) regardless of oil pressure.
The flow is reduced by the control hole X which determines the flow rate.
Steel body. Compensator plunger in ground steel.


HYDRAULIC FEATURES

Max. working pressure	250 bar
ΔP of regulation	5.4 ÷ 6.3 bar
Max. Flow	11.7 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.014 kg
Tightening torque	6 ÷ 8 Nm
Cavity (for VSC04..01)	CD018009 (See section 15)

HYDRAULIC SYMBOL




SEAL (FOR VSC04..00)

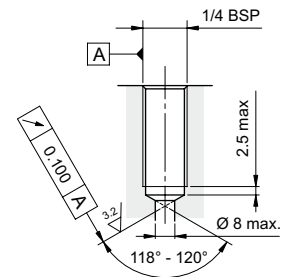

PRESSURE DROPS

Free flow 2 → 1

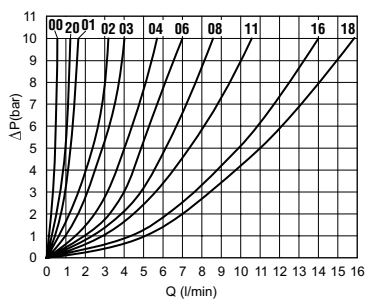

Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

FLOW CONTROLLED BY "X" PORT

Controlled flow 1 → 2

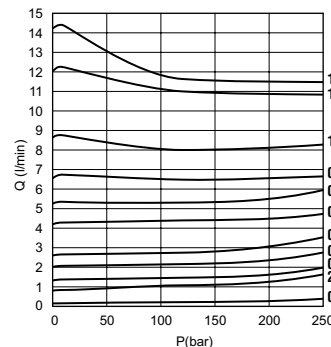



Table 1

Code	Ø X (mm)	Nominal flow at 120 bar (l/min)
00	0.50	0.3
01	1.00	1.4
02	1.25	2.3
03	1.50	2.8
04	1.75	4.3
06	2.00	5.2
08	2.25	6.5
11	2.50	8.0
16	3.00	11.1
18	3.20	11.7
20	0.80	1.1

ORDERING CODE

VSC	04	**	**	**
Series	Size	Controlled flow 1 → 2		
VSC = Fixed flow control valve	04 = 1/4 BSP	Variants		
** = Code (see table 1)		Versions		
		Omit if not required 04 = ΔP of regulation 2.9 bar (only for controlled flow code 00, see table 1)		
		00 = Thread body 1/4 BSP 01 = Body with O-ring (9.25x1.78) M = With column M/F F = With column F/F		

FIXED COMPENSATED FLOW CONTROL VALVE

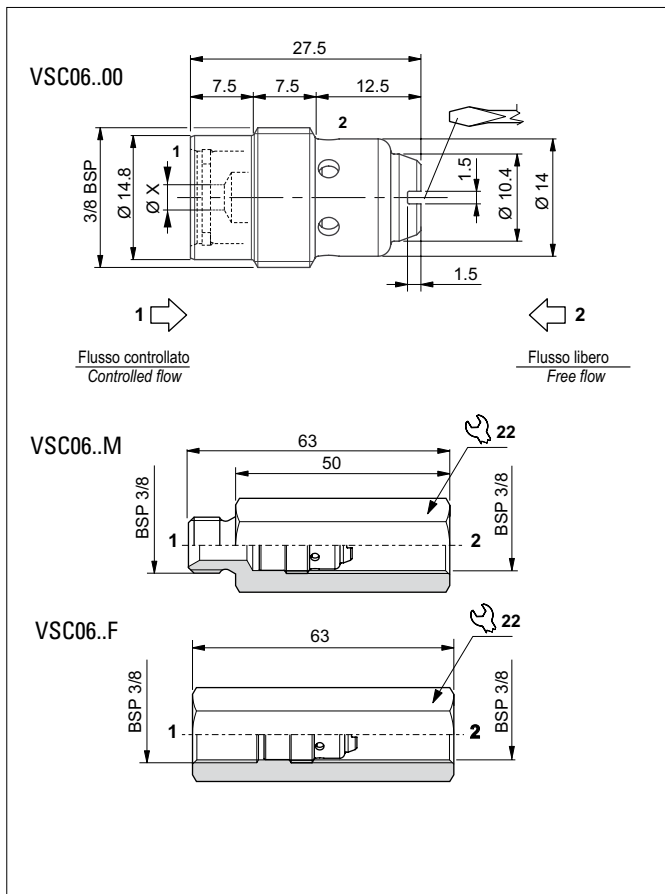


The flow control valve maintains a steady flow in a single direction (1 to 2) regardless of oil pressure.
The flow is reduced by the control hole X which determines the flow rate.
Steel body. Compensator plunger in ground steel.


HYDRAULIC FEATURES

Max. working pressure	250 bar
ΔP of regulation	6.0 ÷ 6.8 bar 2,2 bar (code 10-12 tab. 1)
Max. Flow	18.5 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.026 kg
Tightening torque	6 ÷ 8 Nm


HYDRAULIC SYMBOL



SEAL (FOR VSC06..00)

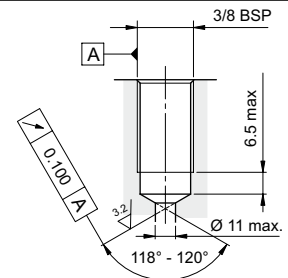

PRESSURE DROPS

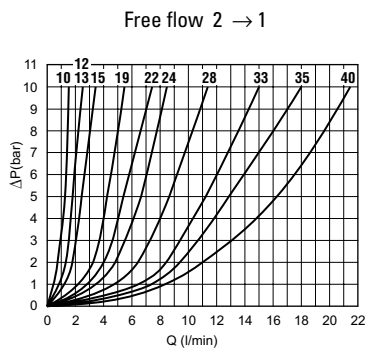

Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.

FLOW CONTROLLED BY "X" PORT


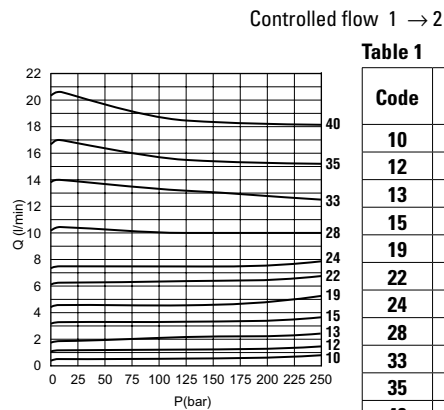



Table 1

Code	Ø X (mm)	Nominal flow at 120 bar (l/min)
10	1.00	0.7
12	1.25	1.1
13	1.25	2.1
15	1.50	3.2
19	1.90	4.7
22	2.20	6.3
24	2.40	7.5
15	1.50	3.2
13	1.25	2.1
12	1.25	1.1
28	2.75	10.0
33	3.25	13.2
35	3.50	15.7
40	4.00	18.5

ORDERING CODE

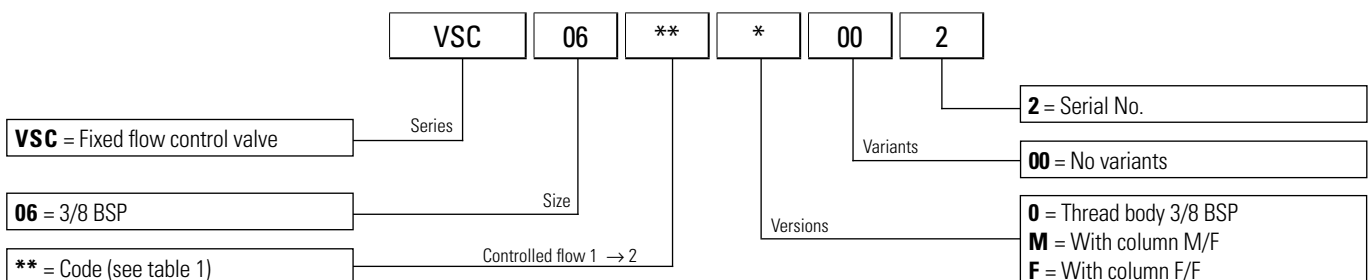

PRIORITY FLOW CONTROL VALVE

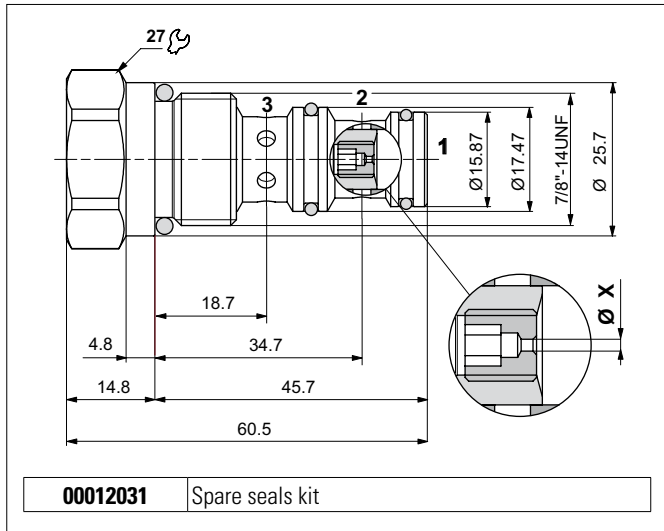

The priority flow control valve sends a constant flow from branch 1, first to priority branch 3 and then the remaining flow to overflow branch 2, regardless of the downstream oil pressure.

Both branches 2 and 3 can be pressurised.


The flow is reduced by the control hole X which determines the flow rate.

It has a galvanised steel body. The compensator plunger is in tempered and ground steel.



HYDRAULIC FEATURES

Max. working pressure	210 bar
ΔP of regulation	6.1 ÷ 6.7 bar
Input max. Flow	50 l/min
Control max. Flow	17 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.2 kg
Tightening torque	30 ÷ 40 Nm
Cavity (7/8 - 14 UNF)	CD019006 (See section 15)

HYDRAULIC SYMBOL

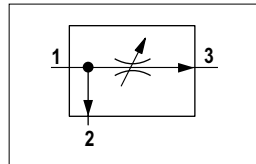

FLOW CONTROLLED

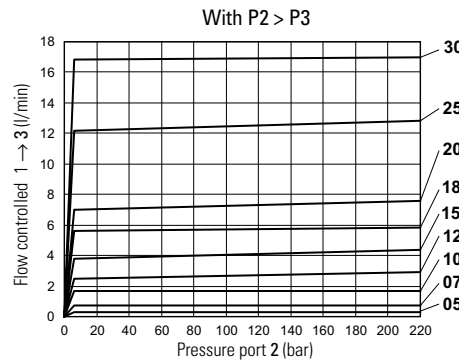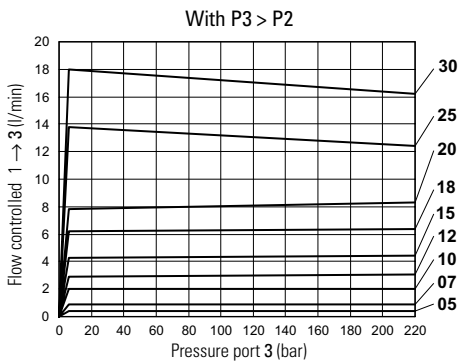

Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.
The regulated flow rate depends on the inlet flow rate and the oil viscosity.


Table 1

Code	$\varnothing X$ (mm) **	Nominal flow (l/min) *
05	0.5	0.3
07	0.7	0.7
10	1.0	1.7
12	1.2	2.5
15	1.5	4.0
18	1.8	5.6
20	2.0	7.0
25	2.5	12.2
30	3.0	17.0


* Flow rate tolerance: $\pm 15\%$ up to 5 l/min, $\pm 10\%$ over 5 l/min

** Tolerance on hole ± 0.02 mm

ORDERING CODE

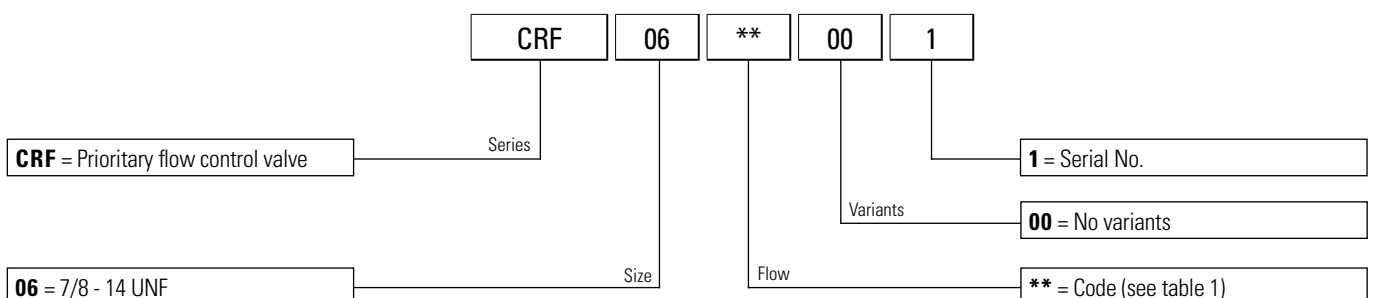


TWO-WAY PRESSURE COMPENSATOR VALVE

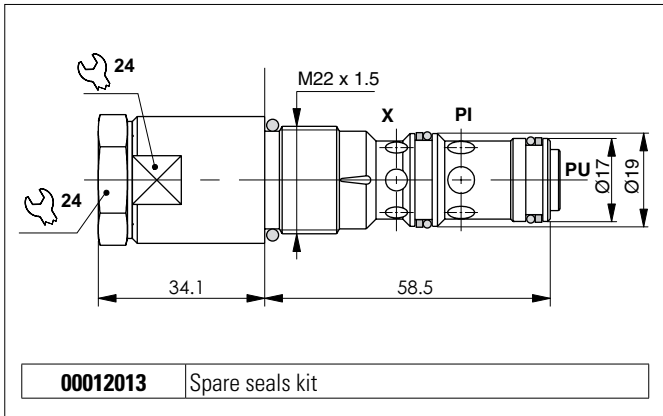


Pressure compensator type CCP maintains a constant pressure drop (Δp) regardless of downstream and up stream set pressure variation.

- Connecting a choke regulator between Pu port and Pil - piloting port - (see hydraulic scheme) it is possible to get a load independent flow regulation.
- This kind of compensator, named "meter in" (check in entrance), is suitable for application on special manifold or in line mounting bodies.

HYDRAULIC SYMBOLS

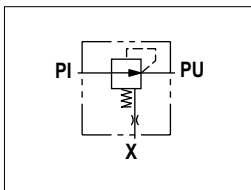

SIMPLIFIED SCHEME

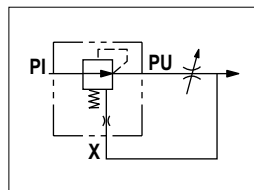


APPLICATION SCHEME

HYDRAULIC FEATURES


Max. working pressure	250 bar
ΔP of regulation (standard)	8 bar
Max. Flow	50 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.2 kg
Tightening torque	30 ÷ 40 Nm
Cavity (M22x1.5)	CN047002 (See section 15)

ΔP BETWEEN PU AND X - FLOW

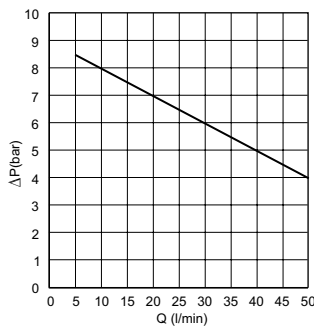


Fluid used: mineral based oil with viscosity 46 mm²/s at 40°C.


PRESSURE - FLOW RATE

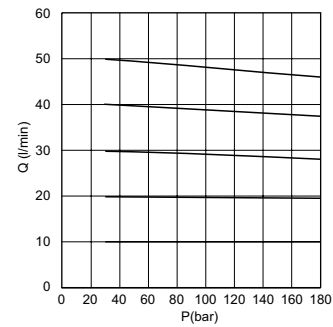

ORDERING CODE

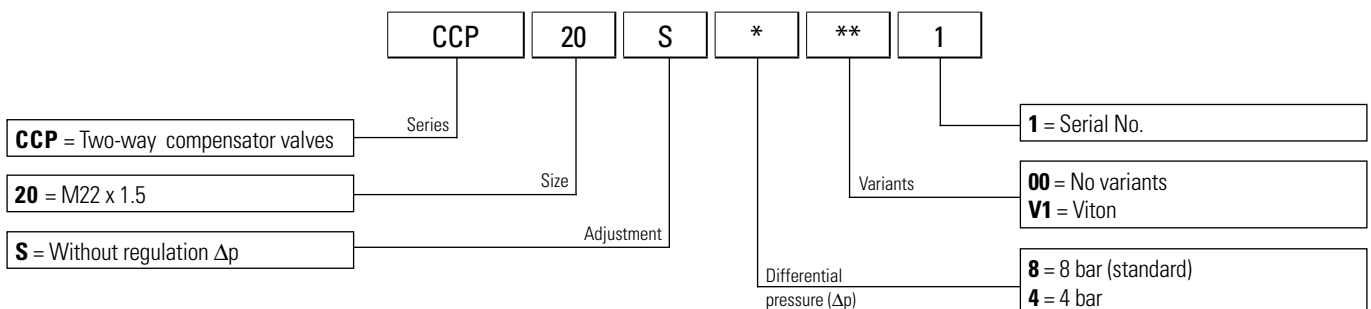

UNIDIRECTIONAL AND BIDIRECTIONAL FLOW CONTROL VALVES - IN-LINE MOUNTING

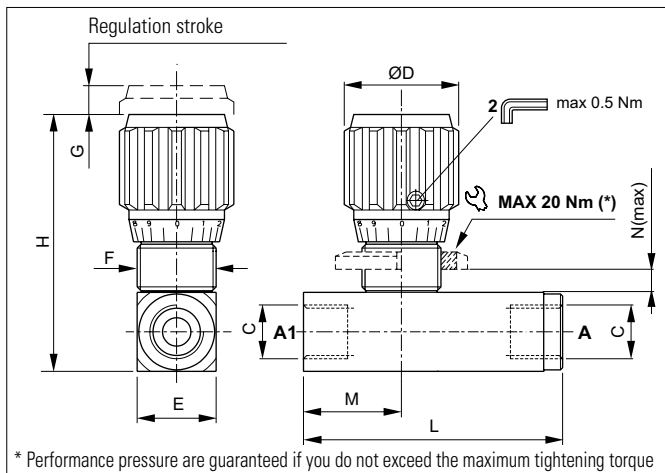




Flow control valve using non compensated throttling. The flow is reduced in only one direction (A to A1) for STU valves and in both directions for STB valves, turning the wheel with locking screw right or left. Guarantees excellent mechanical seal with negligible leakage. It has a galvanised steel body. The check valve tapered poppet is in tempered and ground steel.

HYDRAULIC FEATURES


Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14

Code	C	Flow max (l/min)	Pressure max (bar)	L - STU (mm)	L - STB (mm)	H (mm)	D (mm)	E (mm)	F (mm)	G (mm)	M (mm)	N max (mm)	Weight - STU (kg)	Weight - STB (kg)	Weight screw (kg)
STU-STB 0400	1/4 BSP	20	400	73	54	68.5	31.5	20	M20x1	6	27	7	0.26	0.21	0.020
STU-STB 0600	3/8 BSP	30	400	82	62	80.5	35.5	25	M25x1.5	9.5	31	7	0.44	0.37	0.031
STU-STB 0800	1/2 BSP	50	350	98	73	93	41	30	M30x1.5	8	36.5	9	0.73	0.59	0.043
STU-STB 1200	3/4 BSP	85	320	112	84	110	47	40	M35x1.5	13	42	11	1.36	1.10	0.067
STU-STB 1600	1 BSP	150	300	142	100	121.5	47	45	M40x1.5	11.5	50	15	2	1.52	0.090


HYDRAULIC SYMBOLS




PRESSURE DROPS

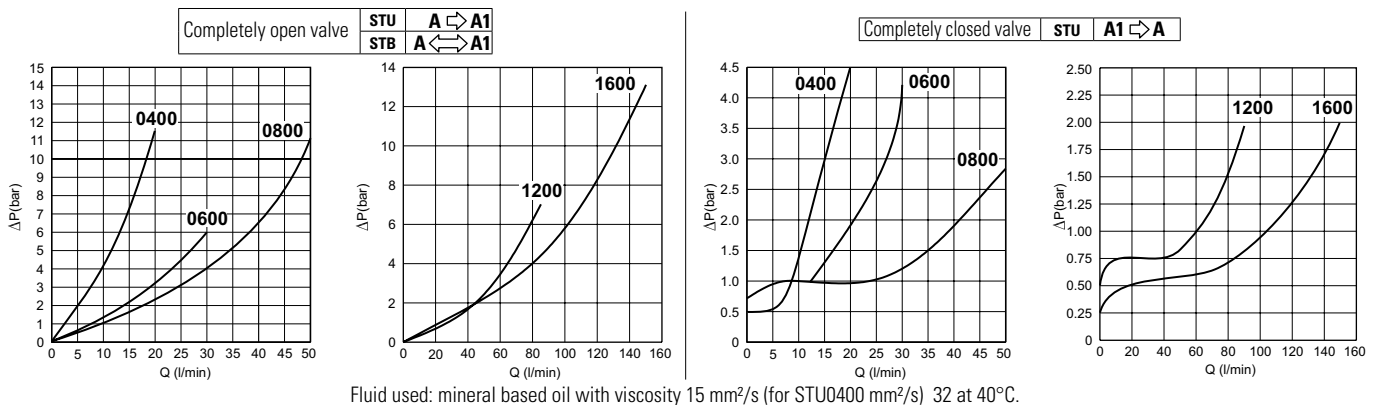

ORDERING CODE

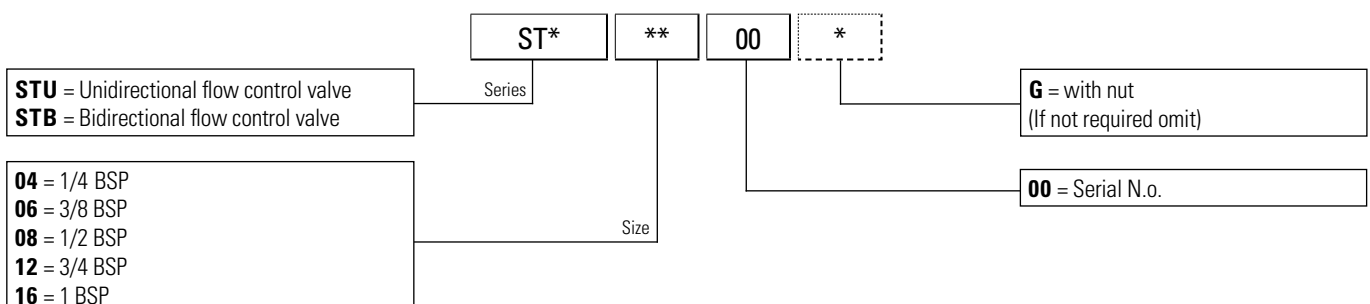

PRESSURE COMPENSATED FLOW UNIDIRECTIONAL FLOW CONTROL VALVES - IN-LINE MOUNTING


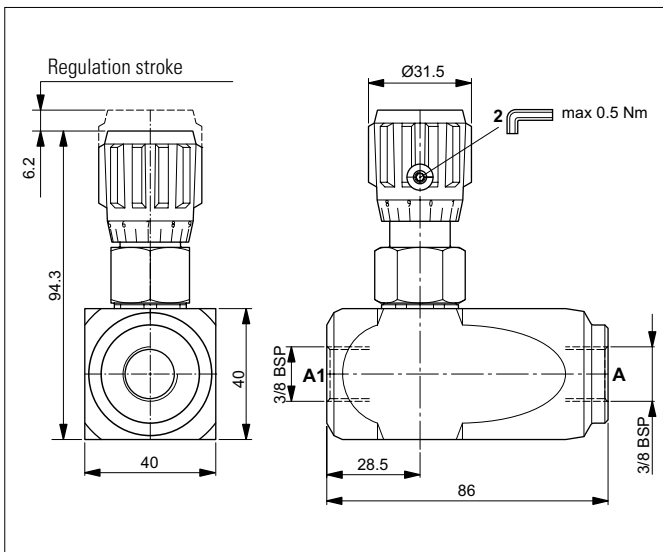


The valve maintains the flow rate in one direction (A to A1) regardless of oil pressure; the oil flows freely in the opposite direction. The flow is reduced by turning the wheel right or left. Slight leakage is tolerated when the control screw or wheel is screwed down completely. It has a galvanised steel body. The compensator plunger and check valve ball poppet are in tempered and ground steel.


HYDRAULIC FEATURES

Max. working pressure	250 bar
ΔP of regulation	12.6 bar
Max. Flow	29 l/min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.95 kg

HYDRAULIC SYMBOL




PRESSURE DROPS

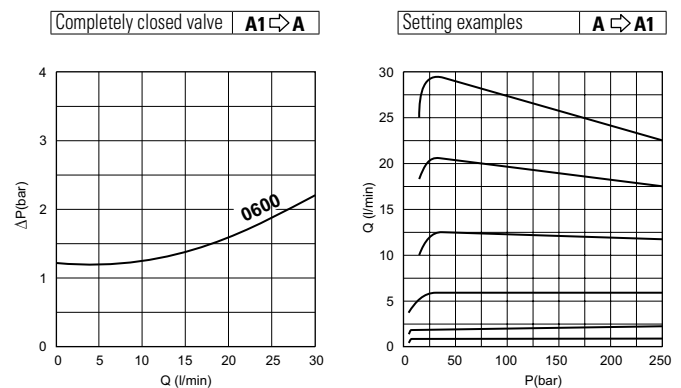


Fluid used: mineral based oil with viscosity 32 mm²/s at 40°C.


ORDERING CODE

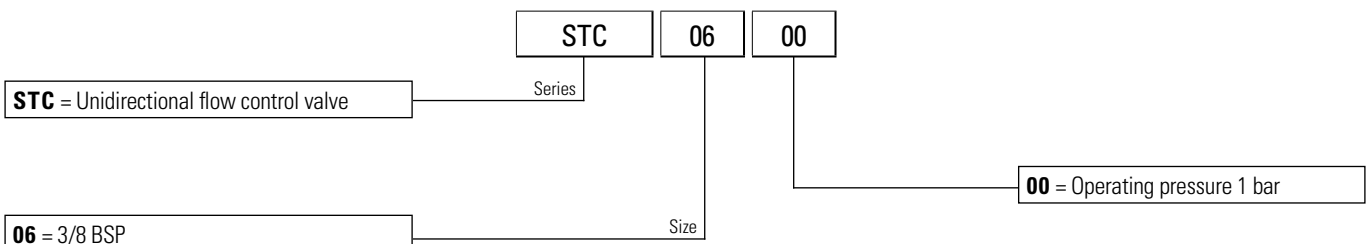

HAND PUMPS

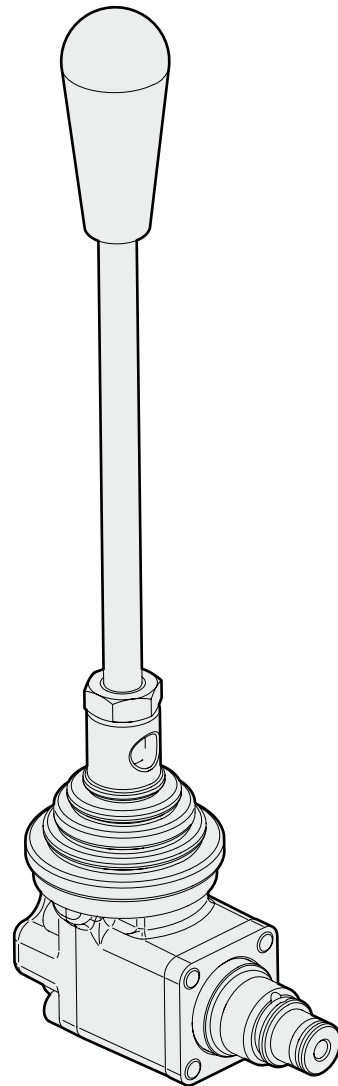

HAND PUMPS

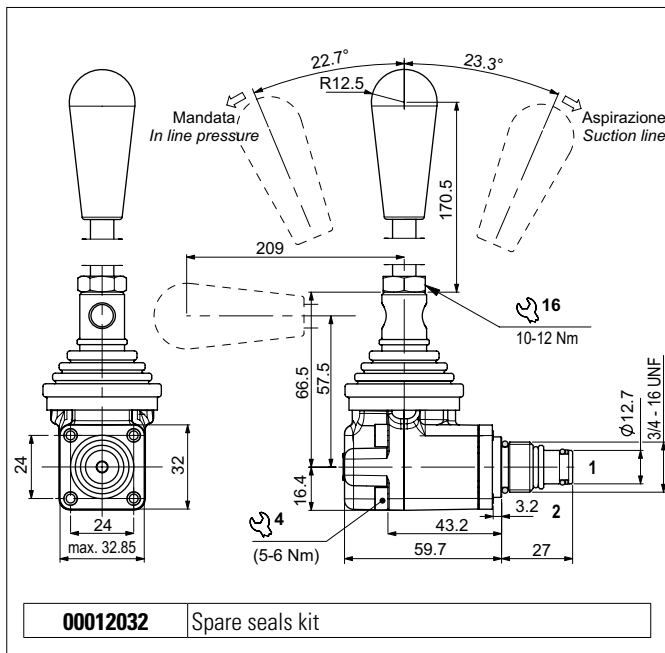


This hand pump handles emergencies manually in small systems. Available in 1cc/pump stroke and 2cc/pump stroke displacement versions. The lever body is in diecast aluminium. The cartridge is steel with tempered and ground steel ball check valves.


HYDRAULIC FEATURES

Max. working pressure	CPM041 = 300 bar CPM042 = 160 bar
Displacement	CPM041 = 1 cc stroke CPM042 = 2 cc stroke
Working Temperature	-25°C ÷ 60°C
Max. Leakage (0 ÷ 5 drops/min)	0 ÷ 0.25 cm ³ /min
Hydraulic fluid	DIN 51524 Mineral oils
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Max. contamin. level class with filter	ISO 4406:1999 - class 19/17/14
Weight	0.41 kg
Tightening torque	25 ÷ 30 Nm
Cavity (3/4 - 16 UNF)	CD018006 (See section 15)

HYDRAULIC SYMBOL

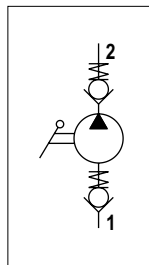


OPERATION FORCE ON THE LEVER

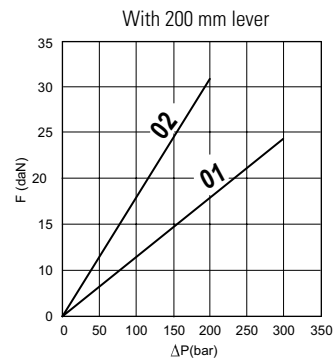



Fluid used: mineral based oil with viscosity 32 mm²/s at 40°C.

ORDERING CODE

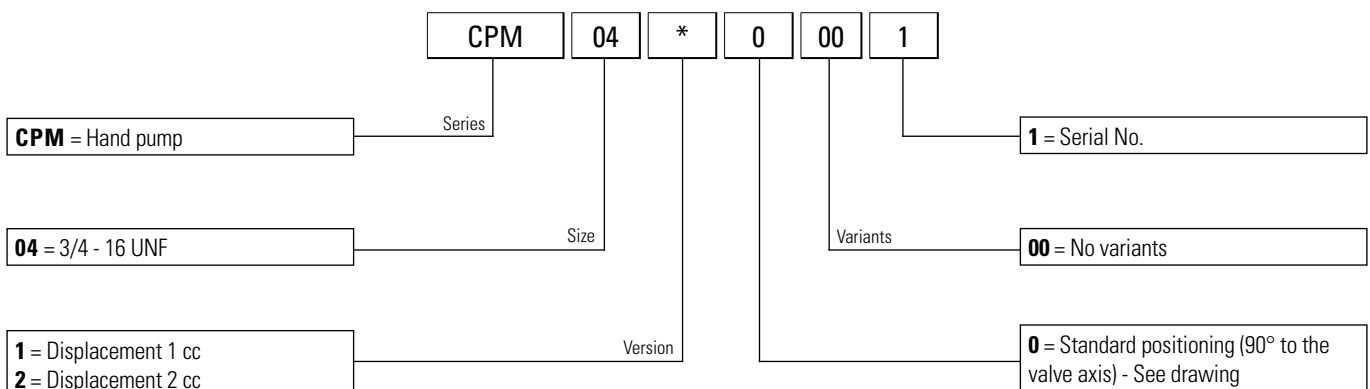


VALVE HOUSINGS

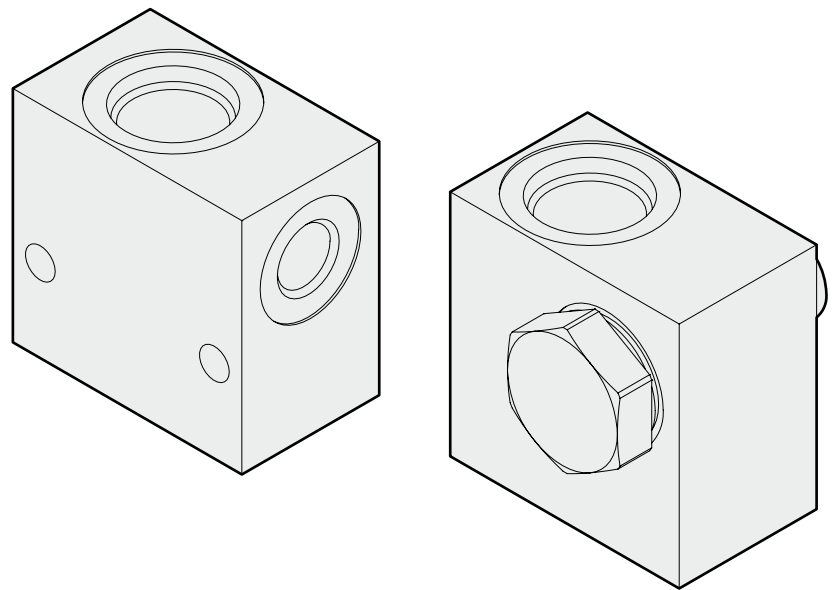


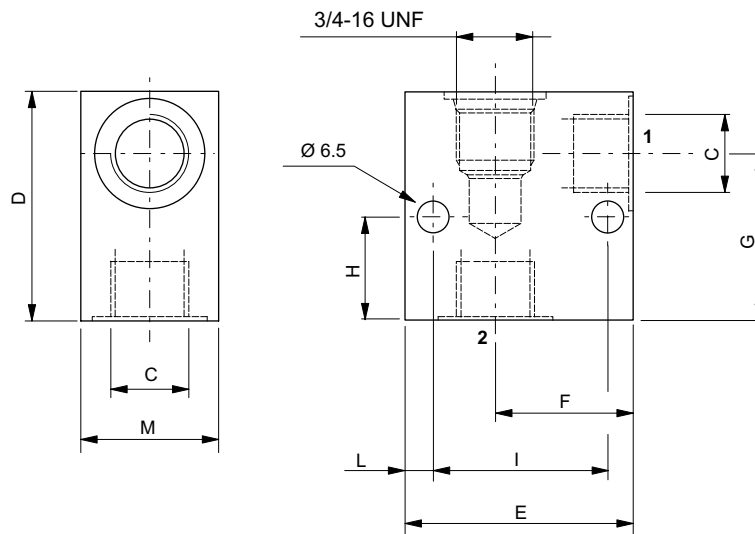


Code	C	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	L (mm)	M (mm)	Material	Cavity
F07100013	1/4 BSP	46	50	30,5	33	18	38	6	30	Alluminio EN AW 2011	CD018006
M18400061	3/8 BSP	55	60	38	41,25	25	45	7,5	30		
M18400071	1/2 BSP	60	60	35	41	6	48	6	40		

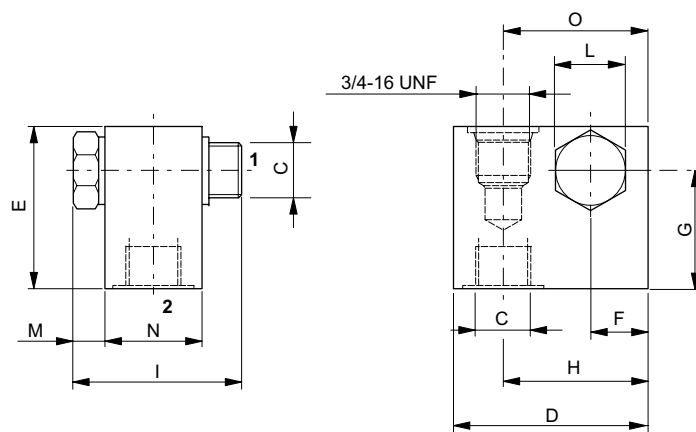

Code	C	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	L (mm)	M (mm)	N (mm)	O (mm)	Material	Cavity
17030532	3/8 BSP	50	50	16	32	35	51	22	9	30	34,5	Alluminium EN AW 2011	CD018006
V10500034	1/4 BSP	40	46	11	31	26	49	19	8	30	26		

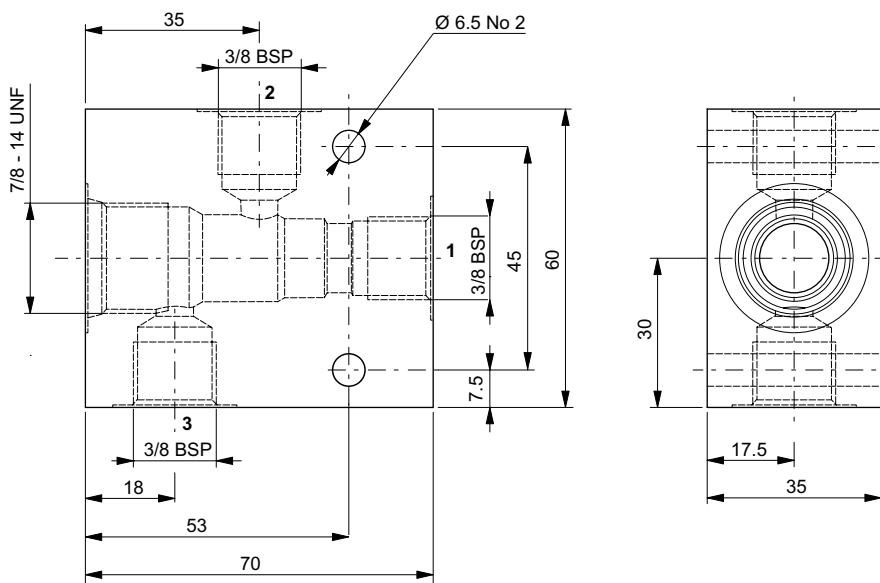


Code	Material	Cavity
M10850319	Alluminium - EN AW 2011	CD019006

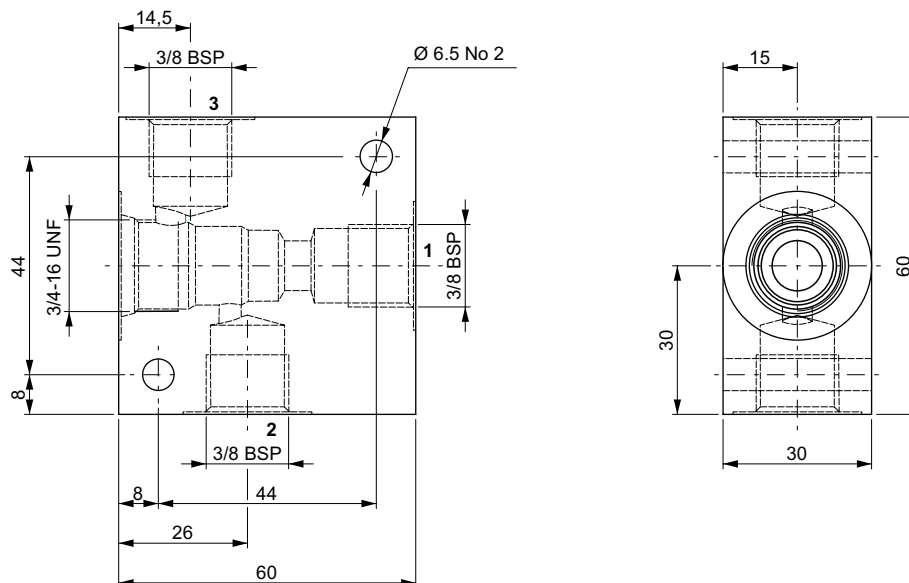

Code	Material	Cavity
M10850206	Alluminium - EN AW 2011	CD018005

CAVITIES

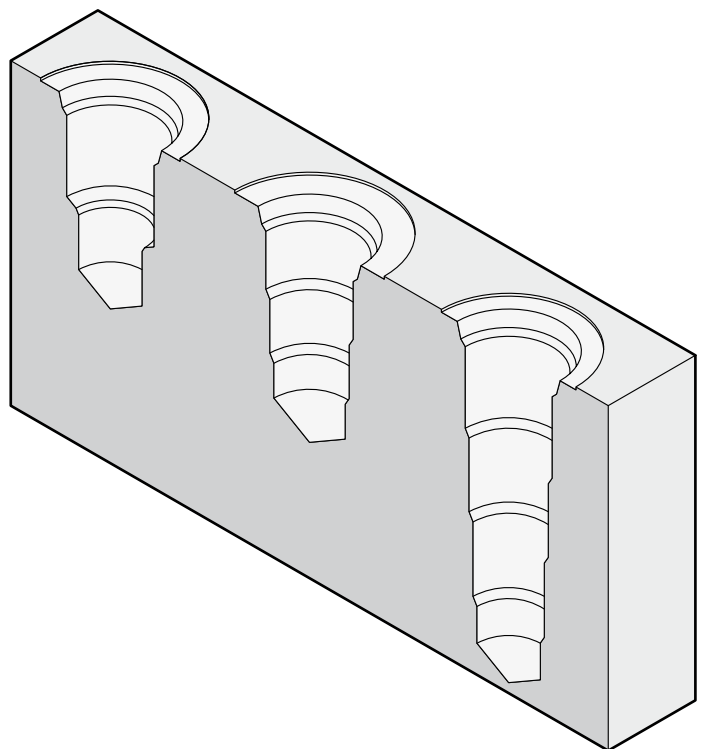

CA012001 **1/4 BSP**

Plugs compatibility:

--	--	--	--	--

CD018001 **3/4 16UNF**

Plugs compatibility:

R78150114	R78150109	R78150111		
-----------	-----------	-----------	--	--

CD018003 **3/4 16UNF**

Plugs compatibility:

20001700	20001900			
----------	----------	--	--	--

CD018005 **3/4 16UNF**

Plugs compatibility:

--	--	--	--	--

CD018006 **3/4 16UNF**

Plugs compatibility:

20001900	20001700	20003800	20009400	20018000
----------	----------	----------	----------	----------


CD018009 **3/4 16UNF**

Plugs compatibility:

20001900	20001700	20003800	20009400	20018000
----------	----------	----------	----------	----------

CD018012

3/4 16UNF

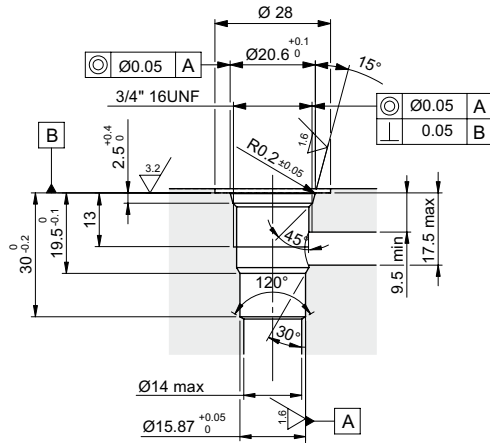


Plugs compatibility:

R78200A19	20001700	20001900		
-----------	----------	----------	--	--

CD018013

3/4 16UNF

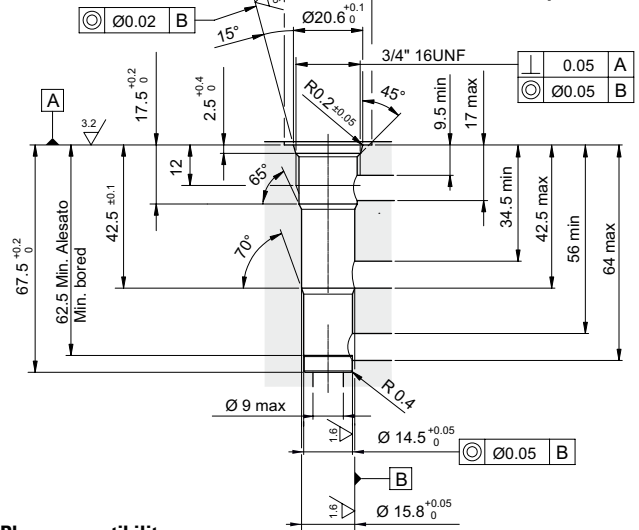


Plugs compatibility:

R78150100				
-----------	--	--	--	--

CD018014

3/4 16UNF

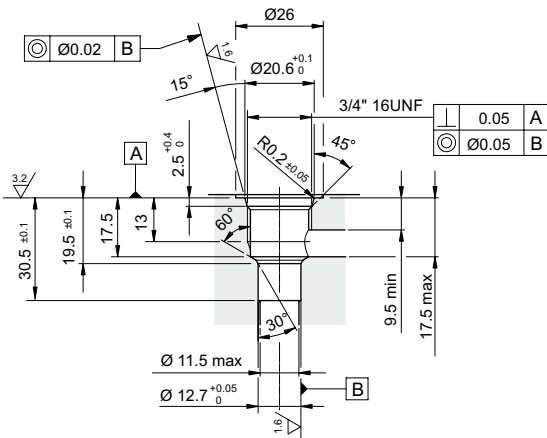


Plugs compatibility:

20001900	20001700	20003800	20009400	20018000
----------	----------	----------	----------	----------

CD018015

3/4 16UNF

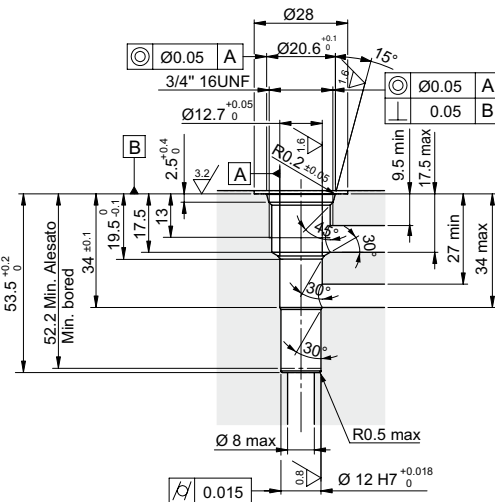


Plugs compatibility:

20018000	20001700	20001900	20003800	20009400
----------	----------	----------	----------	----------

CD018016

3/4 16UNF

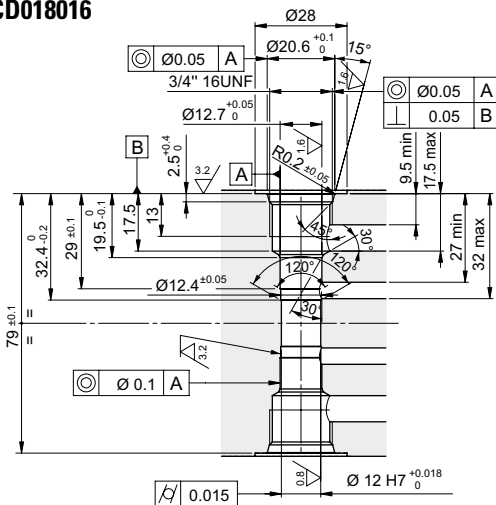


Plugs compatibility:

20018000	20001700	20001900	20003800	20009400
----------	----------	----------	----------	----------

CD019006

7/8 14UNF

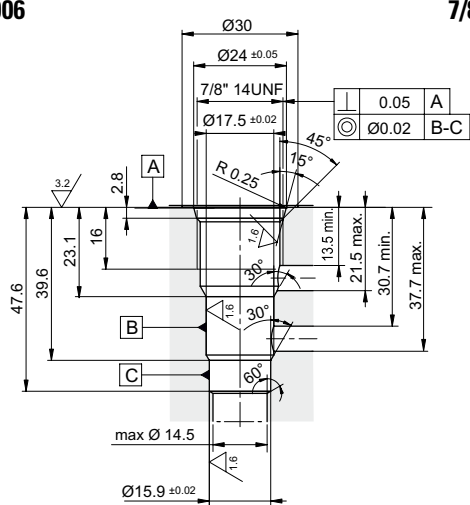


Plugs compatibility:

--	--	--	--	--

CD019007

7/8 14UNF

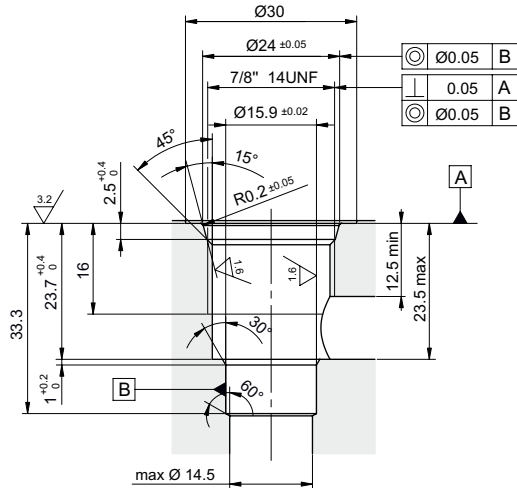


Plugs compatibility:

--	--	--	--	--

CD019011

7/8 14UNF

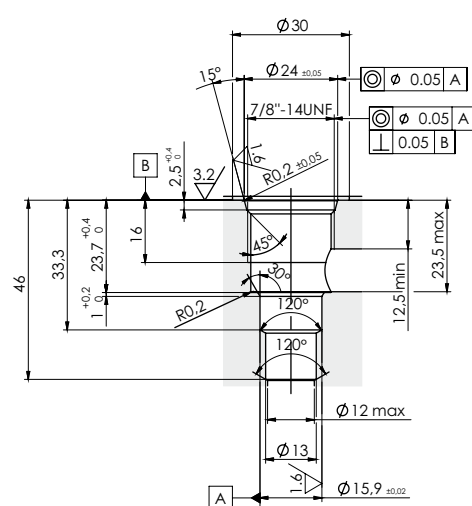


Plugs compatibility:

--	--	--	--	--

CG001002

1/8 BSP

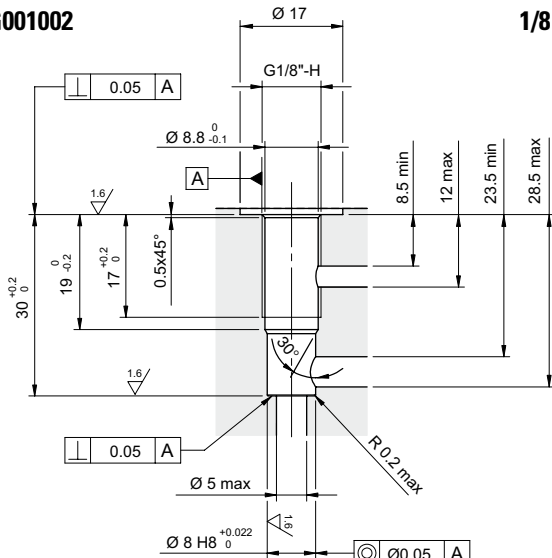


Plugs compatibility:

--	--	--	--	--

CG003004

3/8 BSP

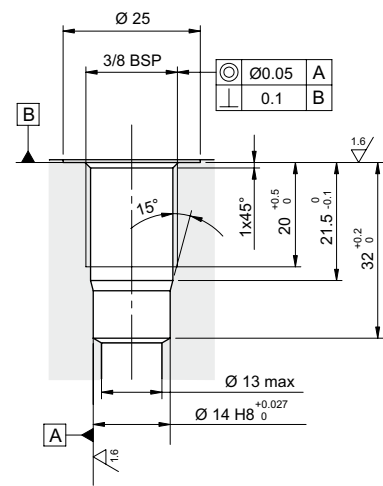


Plugs compatibility:

--	--	--	--	--

CN019002

M10X1

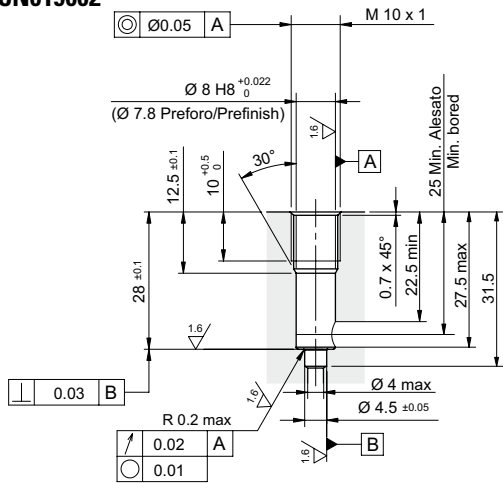


Plugs compatibility:

--	--	--	--	--







CN032005







M14X1.5

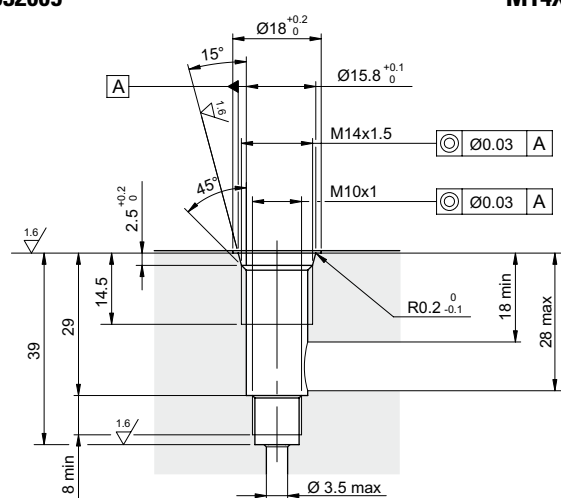


Plugs compatibility:

















--	--	--	--	--

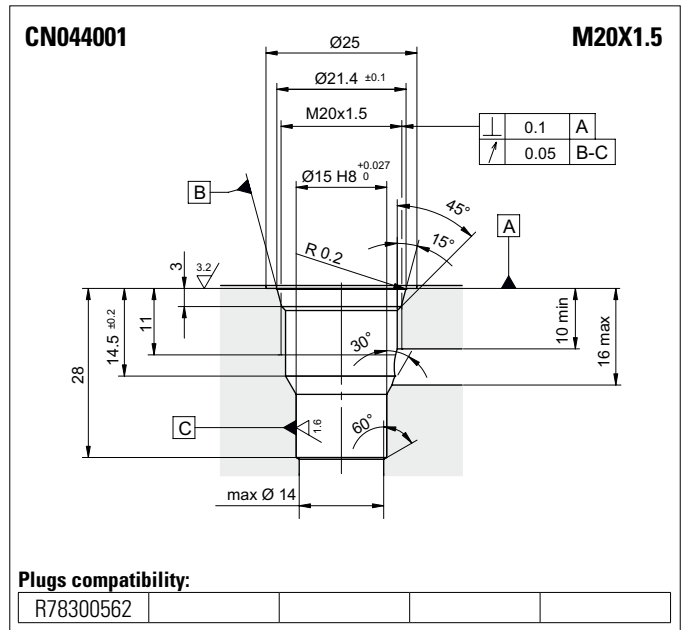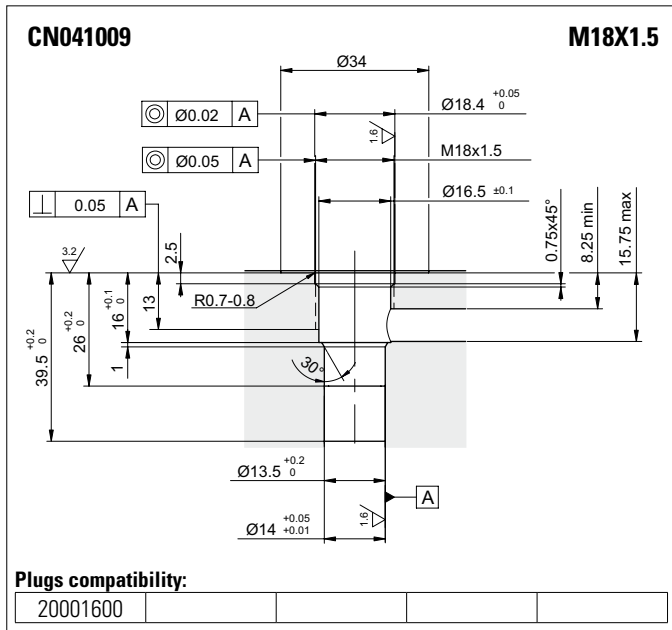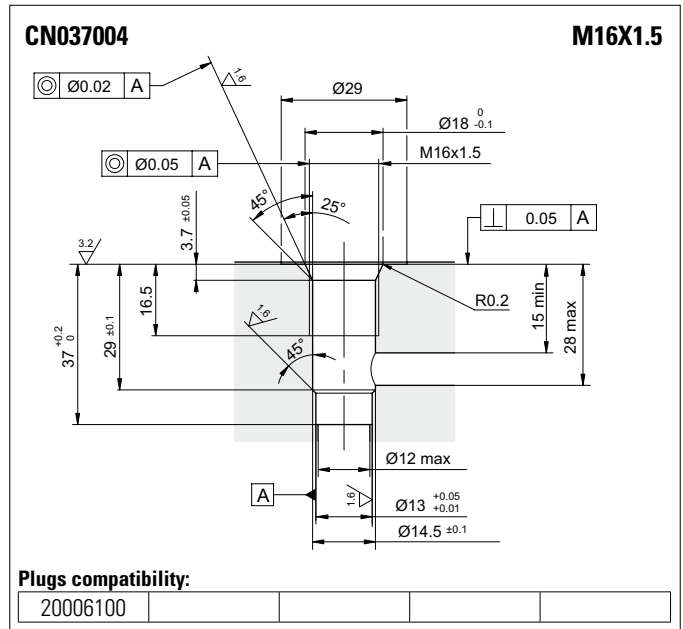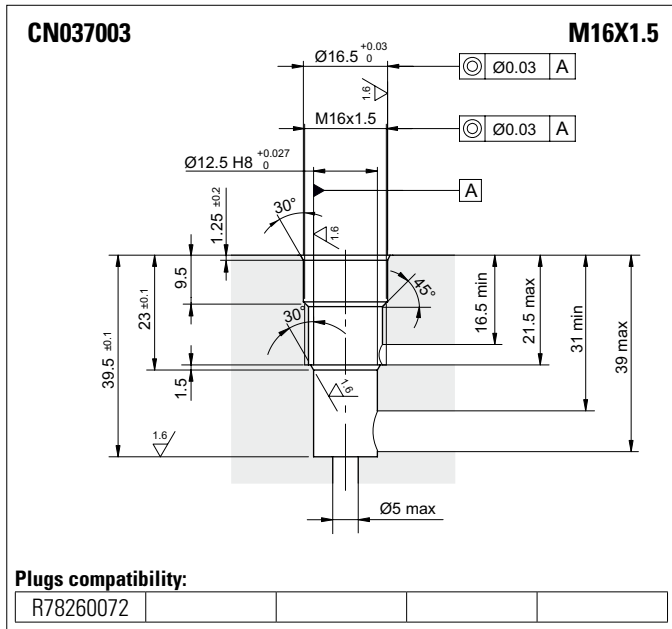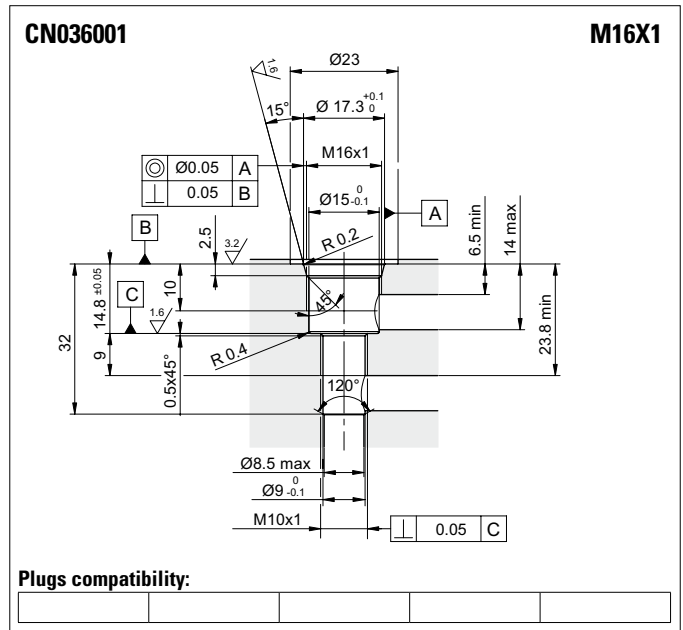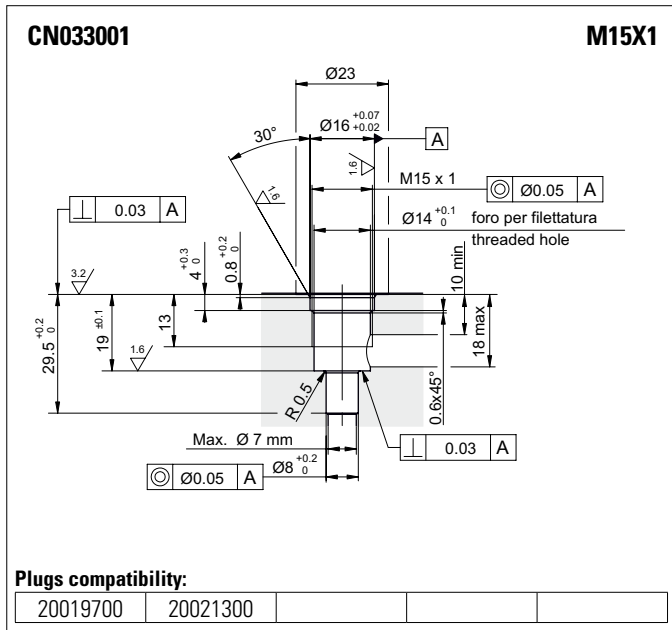

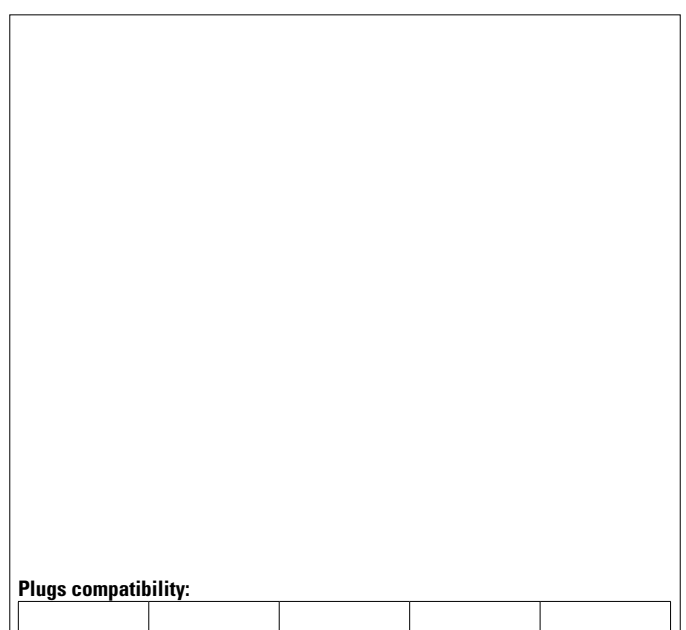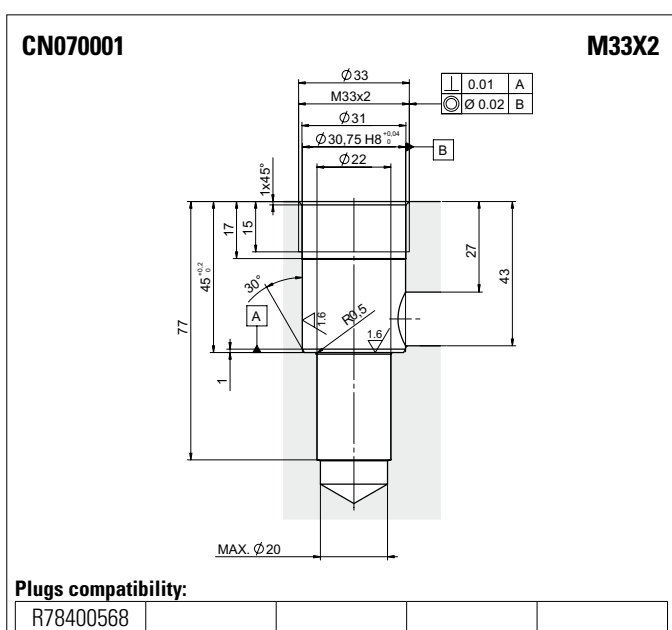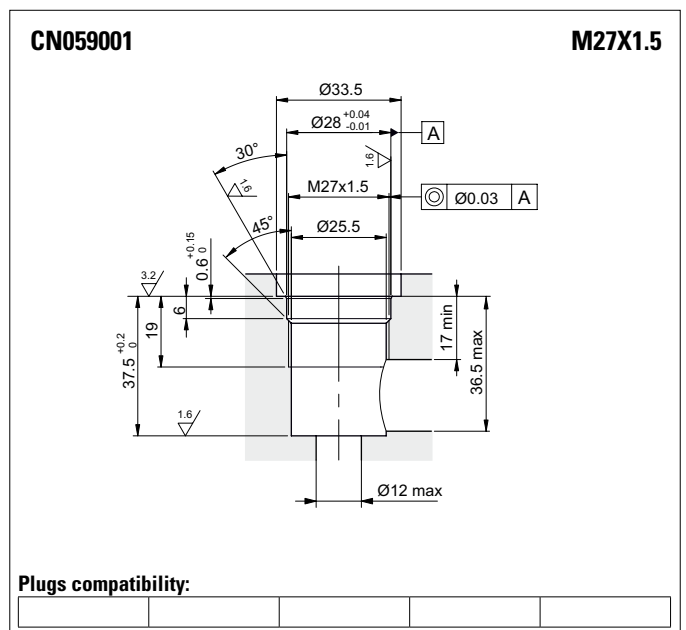
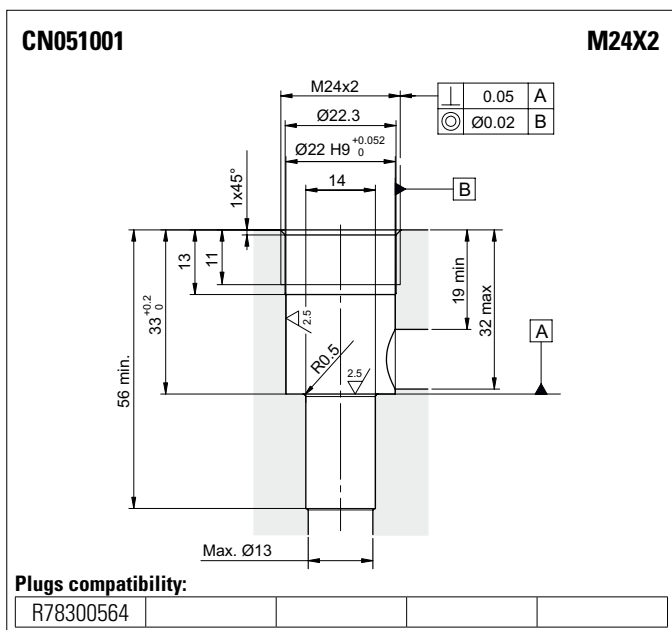
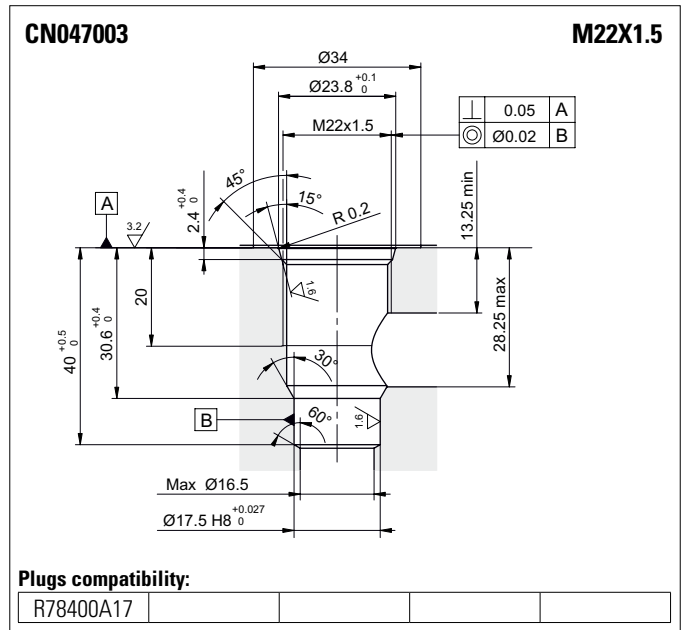
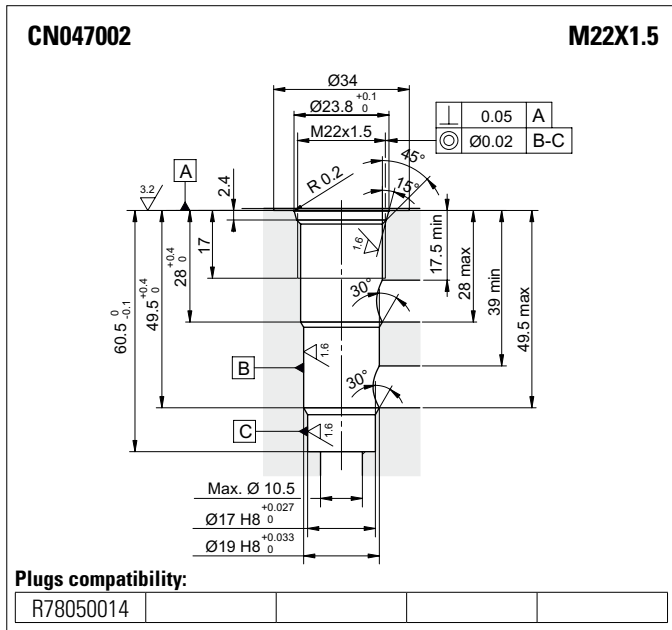


STANDARD PLUGS

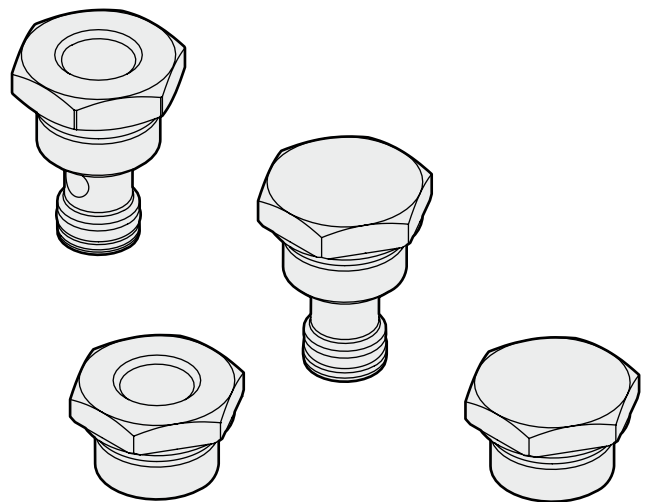


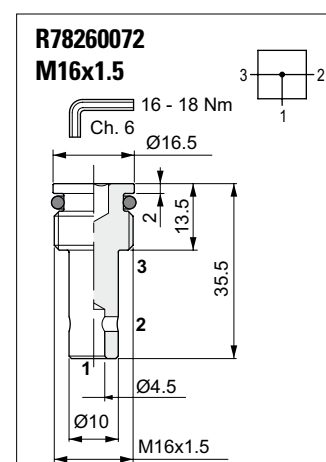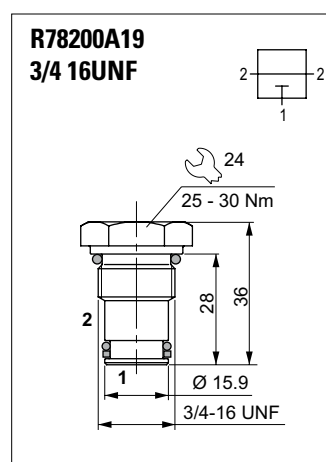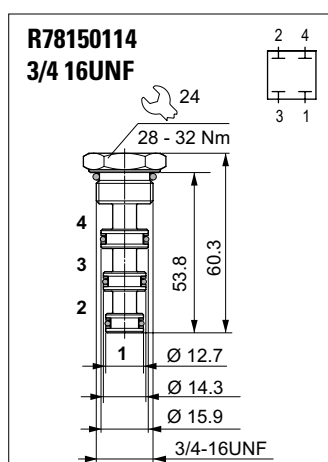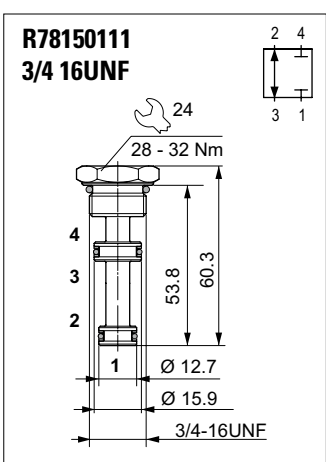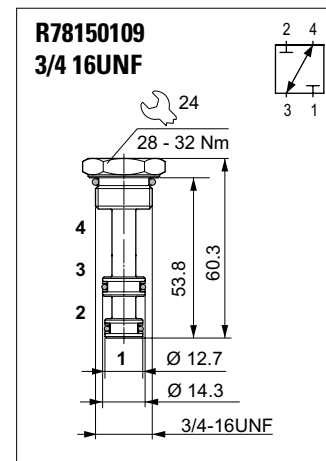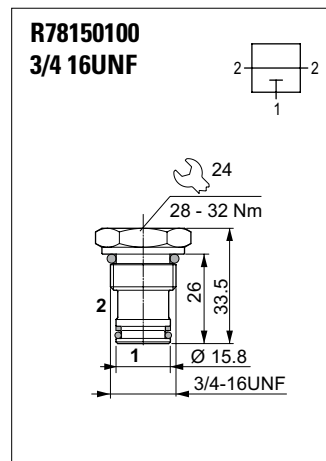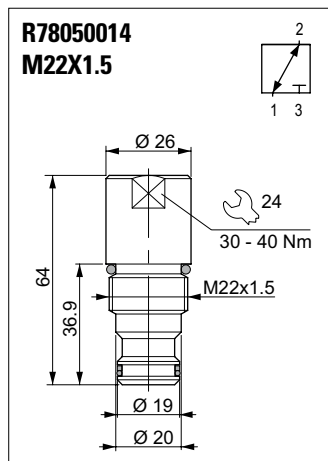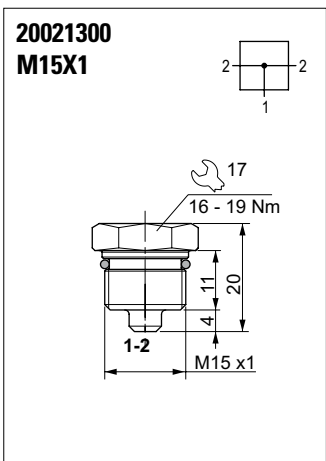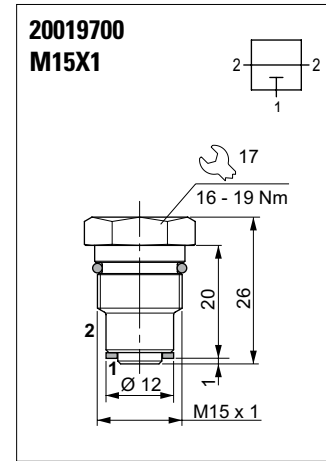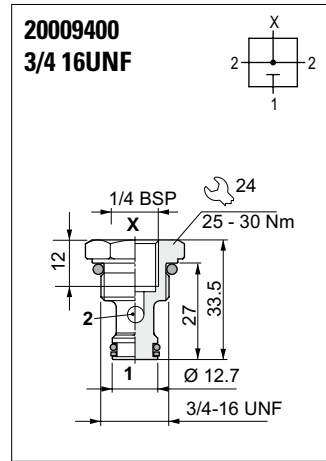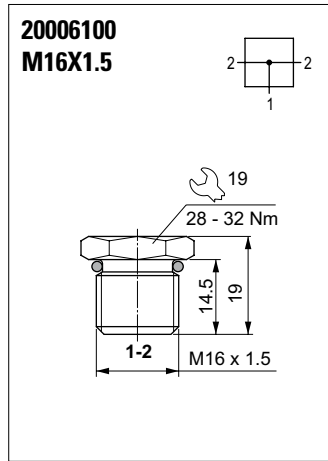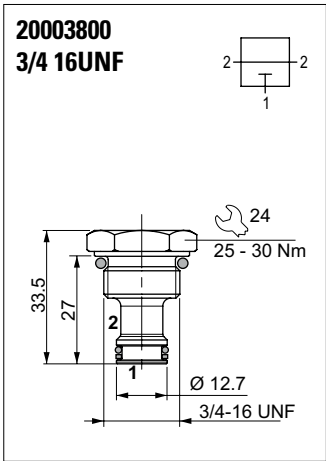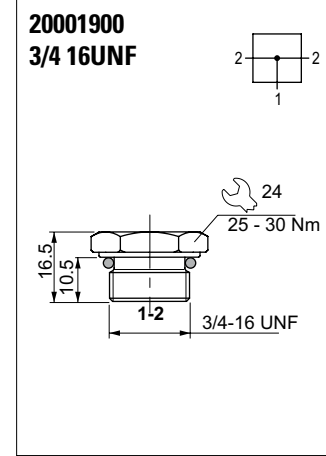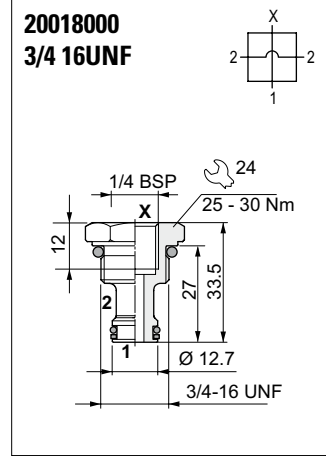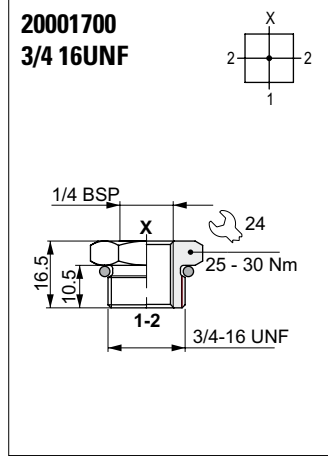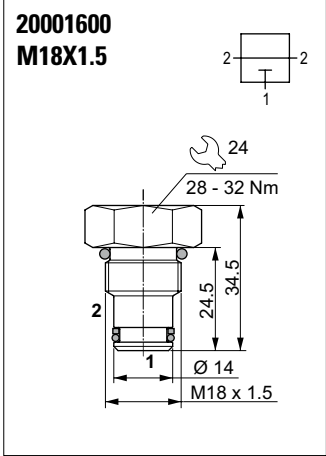

STANDARD PLUGS
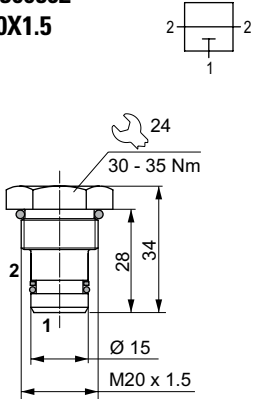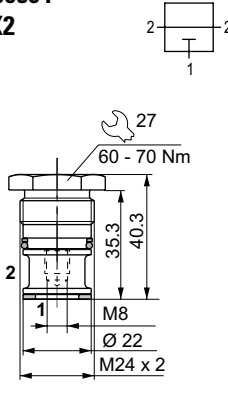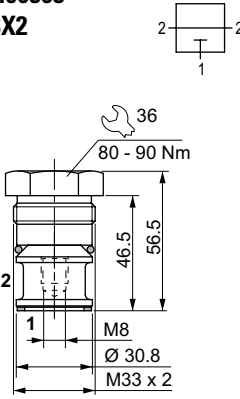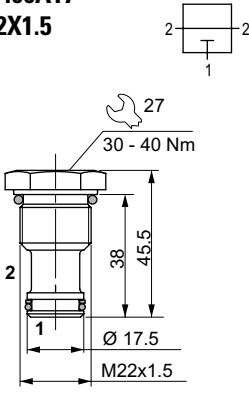
<p>R78300562 M20X1.5</p> 	<p>R78300564 M24X2</p> 	<p>R78400568 M33X2</p> 	<p>R78400A17 M22X1.5</p> 

COILS

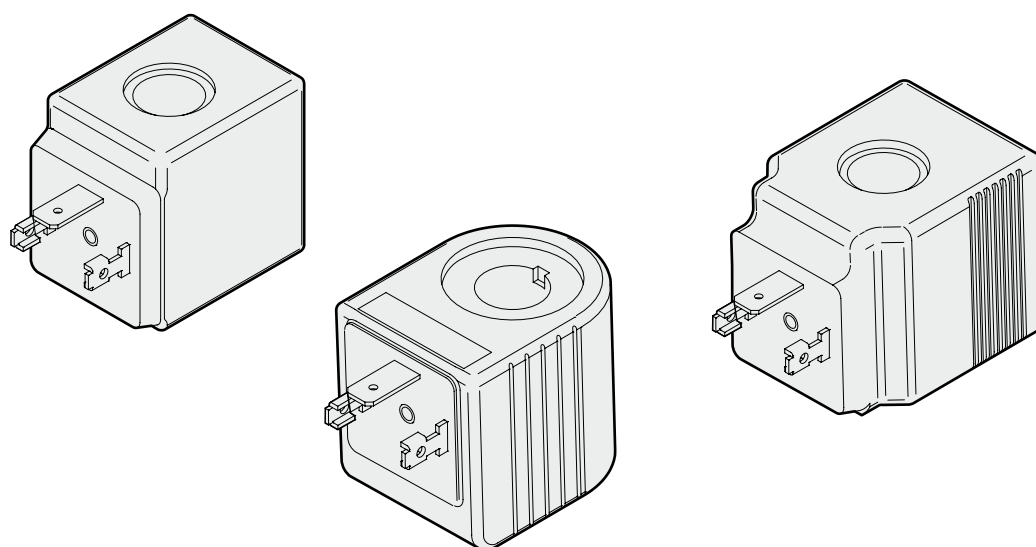


C30 - COILS 18W

Type of protection	IP 65
Number of cycle	18000/h
Supply tolerance	±10%
Ambient temperature	-30°C ÷ 60°C

Duty cycle	100% ED
Insulation class wire	H
Weight	0.141 kg


Standard (Hirschmann ISO 4400 DIN43650)

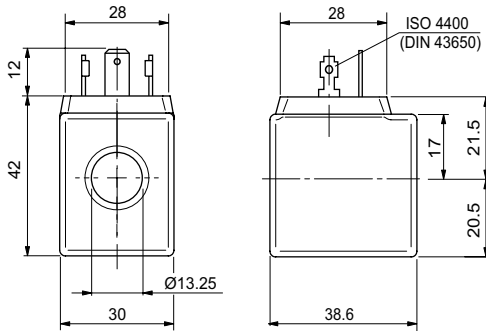

Coil		Max winding temperature (1)	Rated power	Resistance ±7% (2)	Spare code
Code	Voltage				
L	12 VDC	135 °C	18 W	7.7 Ω	M14000001
M	24 VDC	135 °C	18 W	31 Ω	M14000002
N	48 VDC	135 °C	18 W	116 Ω	M14000003
2	21.6 VDC	135 °C	18 W	27 Ω	M14000009
Z	102 VDC (3)	120 °C	18 W	578 Ω	M14000006
X	205 VDC (3)	120 °C	18 W	2627 Ω	M14000007
A	24 VAC/50 Hz	125 °C	35 VA	5.3 Ω	M14001002
J	115 VAC/50 Hz (3)	125 °C	35 VA	108 Ω	M14001004
I	230 VAC/50 Hz (3)	125 °C	35 VA	438 Ω	M14001005
F	24 VAC/60 Hz	125 °C	35 VA	3.8 Ω	M14001012
C	110 VAC/60 Hz (3)	125 °C	35 VA	92 Ω	M14001014
D	220 VAC/60 Hz (3)	125 °C	35 VA	375 Ω	M14001015

(1) Ambient temperature 25 °C - (2) Ambient temperature 20 °C


(3) The european low voltage directive is applied to electronical equipments used at a nominal voltages between 50 and 1000 VAC or 75 and 1500 VDC. In conformity with the low directive each part of the manifold or the subplate on which the valve is mounted should be connected to a protective earth with a resistance less than 0.1 ohms.

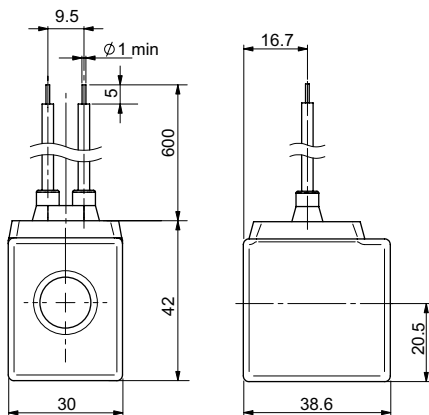

With wires (variant FK)

Coil		Max winding temperature (1)	Rated power	Resistance ±7% (2)	Spare code
Code	Voltage				
L	12 VDC	135 °C	18 W	7.7 Ω	M14000101
M	24 VDC	135 °C	18 W	31 Ω	M14000102

(1) Ambient temperature 25 °C - (2) Ambient temperature 20 °C

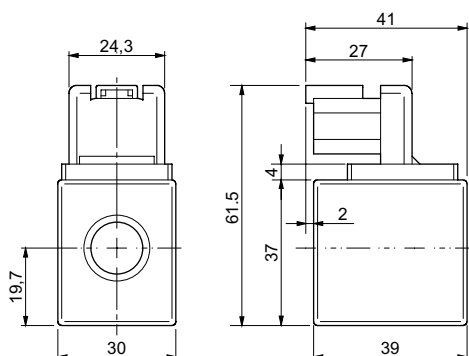

DEUTSCH and bidirectional integrated diode (variant CX)


Coil		Max winding temperature (1)	Rated power	Resistance ±7% (2)	Spare code
Code	Voltage				
L	12 VDC	135 °C	18 W	7.7 Ω	M14760001
M	24 VDC	135 °C	18 W	31 Ω	M14760002

(1) Ambient temperature 25 °C - (2) Ambient temperature 20 °C

C36 - COILS 22W

Type of protection	IP 65
Number of cycle	18000/h
Supply tolerance	±10%
Ambient temperature	-30°C ÷ 60°C

Duty cycle	100% ED
Insulation class wire	H
Weight	0.2 kg

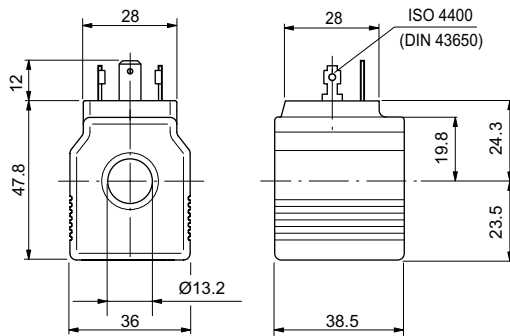


Standard (Hirschmann ISO 4400 DIN43650)

Coil		Max winding temperature (1)	Rated power	Resistance ±7% (2)	Spare code
Code	Voltage				
L	12 VDC	135 °C	22 W	6.3 Ω	M14040001
4	14 VDC	135 °C	22 W	8.9 Ω	M14040009
M	24 VDC	135 °C	22 W	25.6 Ω	M14040002
V	28 VDC	135 °C	22 W	32.8 Ω	M14040008
N	48 VDC	135 °C	22 W	102 Ω	M14040003
2	21.6 VDC	135 °C	22 W	20.2 Ω	M14040000
Z	102 VDC (3)	135 °C	22 W	467.85 Ω	M14040006
X	205 VDC (3)	135 °C	22 W	1954 Ω	M14040007

(1) Ambient temperature 25 °C - (2) Ambient temperature 20 °C


(3) The european low voltage directive is applied to electronical equipments used at a nominal voltages between 50 and 1000 VAC or 75 and 1500 VDC. In conformity with the low directive each part of the manifold or the subplate on which the valve is mounted should be connected to a protective earth with a resistance less than 0.1 ohms.

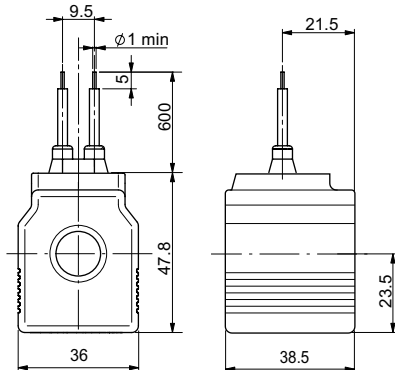

With wires (variant FK)

Coil		Max winding temperature (1)	Rated power	Resistance ±7% (2)	Spare code
Code	Voltage				
L	12 VDC	135 °C	22 W	6.3 Ω	M14040101
4	14 VDC	135 °C	22 W	8.9 Ω	M14040109
M	24 VDC	135 °C	22 W	25.6 Ω	M14040102
V	28 VDC	135 °C	22 W	32.8 Ω	M14040108

(1) Ambient temperature 25 °C - (2) Ambient temperature 20 °C

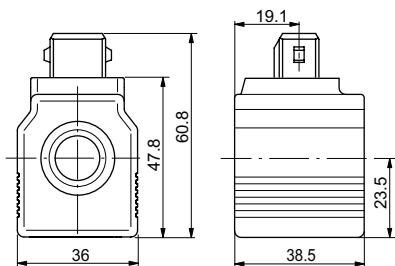

AMP Junior (variant AJ)


Coil		Max winding temperature (1)	Rated power	Resistance ±7% (2)	Spare code
Code	Voltage				
L	12 VDC	135 °C	22 W	6.3 Ω	M14730001
M	24 VDC	135 °C	22 W	25.6 Ω	M14730002

(1) Ambient temperature 25 °C - (2) Ambient temperature 20 °C

A09 - COILS 27W

Type of protection	IP 65
Number of cycle	18000/h
Supply tolerance	±10%
Ambient temperature	-30°C ÷ 60°C

Duty cycle	100% ED
Insulation class wire	H
Weight	0.215 kg

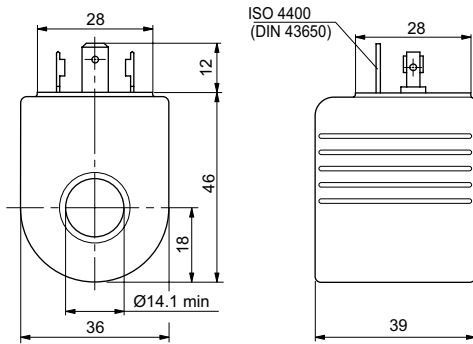


Hirschmann ISO 4400 DIN43650 (connection H)

Code	Coil		Max winding temperature (1)	Rated power	Resistance ±7% (2)	Spare code
	Voltage					
L	12 VDC		123 °C	27 W	5.3 Ω	M14310001
M	24 VDC		123 °C	27 W	21.3 Ω	M14310002
N	48 VDC		123 °C	27 W	85.3 Ω	M14310003
Z	102 VDC (3)		123 °C	27 W	392 Ω	M14310008
P	110 VDC (3)		123 °C	27 W	448 Ω	M14310005
X	205 VDC (3)		123 °C	27 W	1577 Ω	M14310009

(1) Ambient temperature 25 °C - (2) Ambient temperature 20 °C


(3) The european low voltage directive is applied to electronical equipments used at a nominal voltages between 50 and 1000 VAC or 75 and 1500 VDC. In conformity with the low directive each part of the manifold or the subplate on which the valve is mounted should be connected to a protective earth with a resistance less than 0.1 ohms.

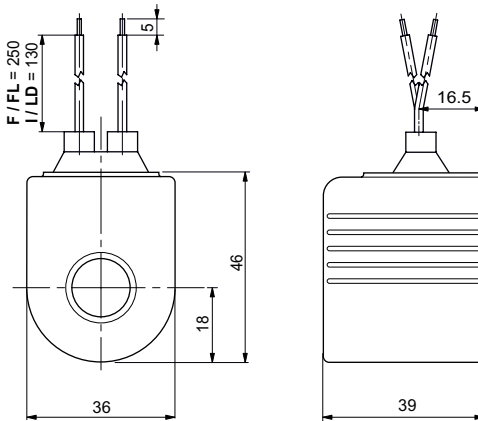

With wires and integrated bidirectional diode (connection F-I / variants FL-LD)

Codice	Bobina		Wires (mm)	Max winding temperature (1)	Rated power	Resistance ±7% (2)	Spare code
	Tensione						
L	12 VDC		F = 250	123 °C	27 W	5.3 Ω	M14070011
M	24 VDC		F = 250	123 °C	27 W	21.3 Ω	M14070012
L	12 VDC		I = 130	123 °C	27 W	5.3 Ω	M14330001
M	24 VDC		I = 130	123 °C	27 W	21.3 Ω	M14330002


(1) Ambient temperature 25 °C - (2) Ambient temperature 20 °C

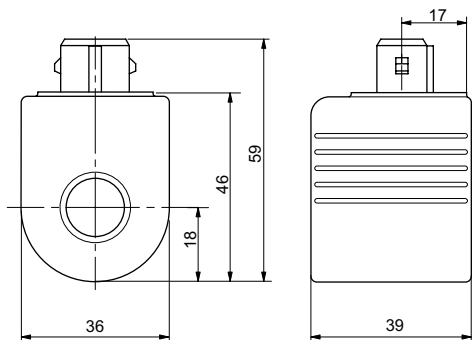

AMP Junior (connection A / variant AJ)

Code	Coil		Max winding temperature (1)	Rated power	Resistance ±7% (2)	Spare code
	Voltage					
L	12 VDC		123 °C	27 W	5.3 Ω	M14320001
M	24 VDC		123 °C	27 W	21.3 Ω	M14320002

(1) Ambient temperature 25 °C - (2) Ambient temperature 20 °C

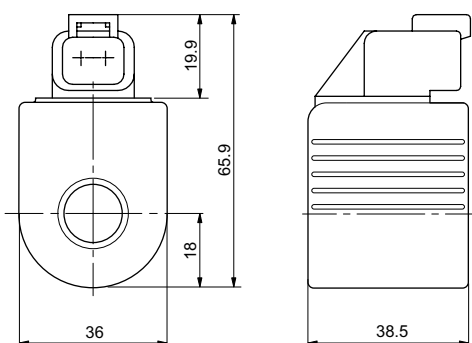

Deutsch + bidirectional diode - DT04-2P (connection D / variant CX)


Code	Coil		Max winding temperature (1)	Rated power	Resistance ±7% (2)	Spare code
	Voltage					
L	12 VDC		123 °C	27 W	5.3 Ω	M14340001
M	24 VDC		123 °C	27 W	21.3 Ω	M14340002

(1) Ambient temperature 25 °C - (2) Ambient temperature 20 °C

D12 - COILS 30W

Type of protection	IP 65
Number of cycle	18000/h
Supply tolerance	±10%
Ambient temperature	-30°C ÷ 60°C

Duty cycle	100% ED
Insulation class wire	H
Weight	0.2 kg

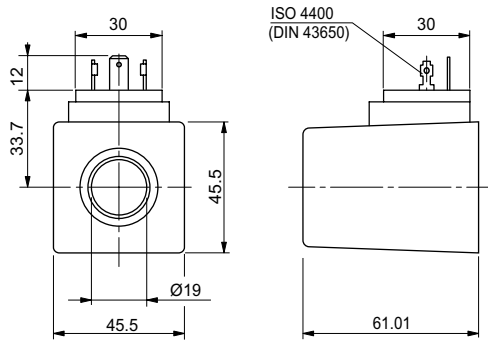


Standard (Hirschmann ISO 4400 DIN43650)


Coil		Max winding temperature (1)	Rated power	Resistance ±7% (2)	Spare code
Code	Voltage				
L	12 VDC	108 °C	30 W	4.7 Ω	M14100010
M	24 VDC	108 °C	30 W	18.8 Ω	M14100011

(1) Ambient temperature 25 °C - (2) Ambient temperature 20 °C

CONNECTORS

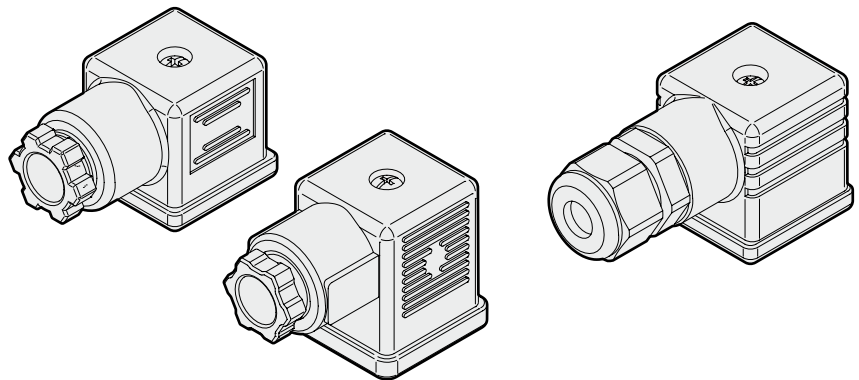


CONNECTORS FOR CONTROL VALVES IN ACCORDANCE WITH DIN 43650 / ISO 4400

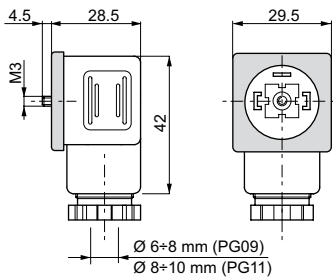


Connector	Protection level	Type	Cable gland	Code
Standard	IP65	Black color	PG09	V86 05 0002
		Grey color	PG09	V86 05 0004
		Black color	PG11	V86 05 0006
		Grey color	PG11	V86 05 0008
Lens cover with pilot light (1)	IP65	12 VAC/VDC	PG09	V86 10 0018
		24 VAC/VDC	PG09	V86 10 0012
		115 VAC/VDC	PG09	V86 10 0020
		230 VAC/VDC	PG09	V86 10 0022

(1) do not use for proportional versions

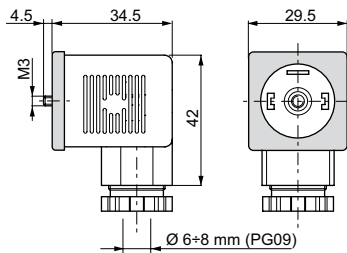


Connector	Protection level	Type	Cable gland	Code
With rectifier (1) Inlet voltage 12÷230 VAC Outlet voltage 9÷205 VDC	IP65	Black color	PG09	V86 20 0002
		Grey color	PG09	V86 20 0004
Lens cover with pilot light and rectifier (1) Inlet voltage 12÷230 VAC Outlet voltage 9÷205 VDC	IP65	12 VAC	PG09	V86 25 0018
		24 VAC	PG09	V86 25 0019
		48 VAC	PG09	V86 25 0020
		115 VAC	PG09	V86 25 0021
		230 VAC	PG09	V86 25 0022

(1) do not use for proportional versions

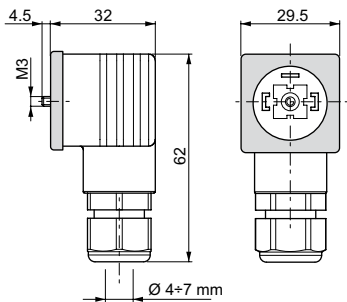


Connector	Protection level	Type	Cable gland	Code
With protection level IP67	IP67	Black color	—	V86 28 0001
		Grey color	—	V86 28 0002

Electrical features of connectors

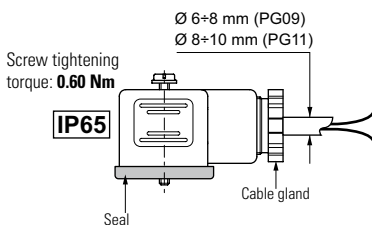


Description	IP65	IP67
AC rated voltage	Max. 250 V	Max. 250 V
DC rated voltage	Max. 300 V	Max. 300 V
Pin contact nominal current	10A	10A
Pin contact max. current	16A	16A
Max. section cable	1.5 mm ²	1.5 mm ²
Cable gland PG09 - M16x1,5	Ø cable 6 ÷ 8 mm	Ø cable 4 ÷ 7 mm
Cable gland PG11 - G 1/2" - M20x1,5	Ø cable 8 ÷ 10 mm	—
Protection level	IP65 EN60529	IP67 EN60529
Insulation class	VDE 0110-1/89	VDE 0110-1/89
Operating temperature	-40°C ÷ 90°C	-20°C ÷ 80°C


The degrees of protection indicate is guaranteed only if the connectors were properly mounted with his original seals.

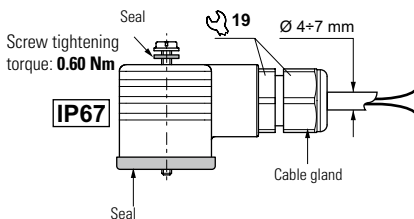

Electrical circuits

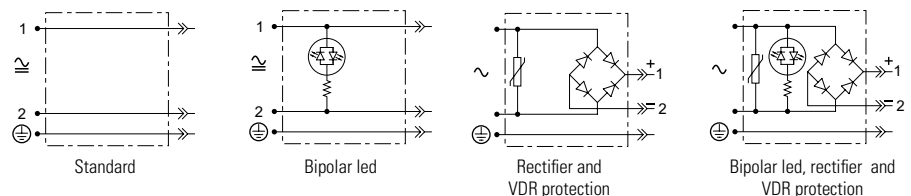

AMP JUNIOR CONNECTORS

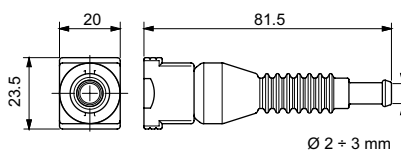

Connector	Type	Cable section	Pin contact max current	Code
AMP Junior connector Timer 2 contact	Black color	0,5 ÷ 1,5 mm ²	10A	RKRC0808000

Code DOC0044 - Rev.05



Brevini Fluid Power S.p.A.
Via Moscova, 6
42124 Reggio Emilia - Italy
Tel. +39 0522 270711
Fax +39 0522 270660
www.brevinifluidpower.com
info@brevinifluidpower.com

