

# Mechanical JAW PULLERS

## 1-25 Ton


### 2 & 2/3 Jaw Pullers

Pullers designed to pull gears, bearings and countless other press fitted parts.

BEARING MAINTENANCE

#### Choosing the right size puller:


Compare the "reach" and "spread" of the pulling job with that of the pullers listed. The puller selected must have dimensions greater than those of the job.









Fed. Spec.: GGG-P-00781-D

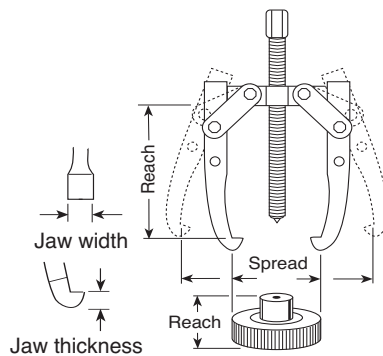


- Grip-O-Matic® feature on all pullers. The harder the pull, the tighter the grip for removing gears, bearings and countless other press fitted parts.
- 2-way, 3-way and 2/3 way combination pullers make it easy to select a specific puller for a specific application.
- Forged from high quality steel, heat treated and subjected to rigorous tests which exceed rated puller capacity.



Order No.	Max.		Screw Size (in.)	Jaw		Capacity, Style and Weight	
	Reach (in.)	Spread (in.)		Thickness (in.)	Width (in.)		
 	1020	2 <sup>1</sup> / <sub>8</sub>	3 <sup>1</sup> / <sub>4</sub>	5/16-24 x 3 <sup>7</sup> / <sub>8</sub>	9/64	1/4	1-Ton, 2-Jaw; 5 oz.
	1021	2 <sup>1</sup> / <sub>8</sub>	3 <sup>1</sup> / <sub>4</sub>	5/16-24 x 3 <sup>7</sup> / <sub>8</sub>	9/64	1/4	1-Ton, 3-Jaw; 8 oz.
 	1022	3 <sup>3</sup> / <sub>8</sub>	4	3/8-24 x 4 <sup>7</sup> / <sub>8</sub>	Upper 3/16 Lower 1/8	Upper 1/4 Lower 1/2	2-ton, 2-Jaw; 14 oz. (Reversible Jaws)
	1023	3 <sup>3</sup> / <sub>8</sub>	4 <sup>3</sup> / <sub>4</sub>	3/8-24 x 4 <sup>7</sup> / <sub>8</sub>	Upper 3/16 Lower 1/8	Upper 1/4 Lower 1/2	2-ton, 2/3-Jaw; 1 lb., 5 oz. (Reversible Jaws)
 	1024	3 <sup>1</sup> / <sub>4</sub>	6	9/16-20 x 6 <sup>15</sup> / <sub>16</sub>	Upper 15/16 Lower 1/4	Upper 3/8 Lower 3/4	5-Ton, 2-Jaw; 1 lb., 12 oz. (Reversible Jaws)
	1026	3 <sup>1</sup> / <sub>4</sub>	7	9/16-20 x 6 <sup>15</sup> / <sub>16</sub>	Upper 15/16 Lower 1/4	Upper 3/8 Lower 3/4	5-Ton, 2/3-Jaw; 2 lbs., 12 oz. (Reversible Jaws)

- Alloy steel heads are forged for maximum strength.
- Forcing screw threads are rolled, not cut. This process creates a smoother and stronger thread.
- Heat treated alloy steel cross bolts for maximum shear strength.
- Machined puller jaw toes produce larger and stronger pulling toes.

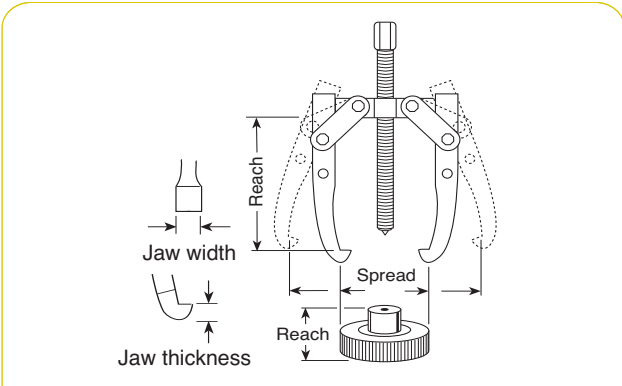

Order No.	Max.		Screw Size (in.)	Jaw		Capacity, Style and Weight	
	Reach (in.)	Spread (in.)		Thickness (in.)	Width (in.)		
	<b>1025</b>	5 1/2	6	9/16-20 x 6 15/16	Upper 5/16 Lower 1/4	Upper 3/8 Lower 3/4	5-Ton, Long 2-Jaw; 2 lbs. (Reversible Jaws)
	<b>1027</b>	5 1/2	7	9/16-20 x 6 15/16	Upper 5/16 Lower 1/4	Upper 3/8 Lower 3/4	5-Ton, Long 2/3-Jaw; 3 lbs., 10 oz. (Rev. Jaws)
	<b>1035</b>	5	9	11/16-18 x 9	Upper 5/16 Lower 11/32	Upper 1 Lower 1	7-Ton, 2-Jaw; 4 lbs., 8 oz. (Reversible Jaws)
	<b>1037</b>	5	10 1/2	11/16-18 x 9	Upper 5/16 Lower 11/32	Upper 1 Lower 1	7-Ton, 2/3-Jaw; 6 lbs., 2 oz. (Rev. Jaws)
	<b>1036</b>	8 3/4	9 1/2	11/16-18 x 9	11/32	1	7-Ton, Long 2-Jaw; 5 lbs., 6 oz.
	<b>1038</b>	8 3/4	11	11/16-18 x 9	11/32	1	7-Ton, Long 2/3-Jaw; 8 lbs., 2 oz.
	<b>1039</b>	11	12	13/16-16 x 12	9/16	1	13-Ton, 2-Jaw; 10 lbs., 13 oz.
	<b>1040</b>	15 1/4	15 1/2	13/16-16 x 12	9/16	1	13-Ton, Long 2-Jaw; 13 lbs.
	<b>1041</b>	11	12	13/16-16 x 12	9/16	1	13-Ton, 2/3-Jaw; 16 lbs., 4 oz.
	<b>1042</b>	15 1/4	17	13/16-16 x 12	9/16	1	17.3-Ton, Long 2/3-Jaw; 18 lbs., 12 oz.
	<b>1043</b>	14 1/2	14	1"6 x 12	9/16	1	13-Ton, Long 2/3-Jaw; 18 lbs., 12 oz.
	<b>1044</b>	18 3/4	16	1-14 x 13 1/2" lg.	13/16	1 9/32	17 1/2-Ton, Long 2-Jaw; 23 lbs.
	<b>1045</b>	14 1/2	14	1-14 x 13 1/2	13/16	1 9/32	17 1/2-Ton, 3-Jaw; 33 lbs.
	<b>1046</b>	18 3/4	16	1-14 x 13 1/2	13/16	1 9/32	17 1/2-Ton, Long 3-Jaw; 37 lbs.
	<b>1048</b>	22 1/4	20	1 1/4-12 x 16 5/8	1 1/16	1 1/2	25-Ton, Long 2-Jaw; 42 lbs., 12 oz.
	<b>1050</b>	22 1/4	20	1 1/4-12 x 16 5/8	1 1/16	1 1/2	25-Ton, Long 3-Jaw; 60 lbs.

For puller piece part identification, order Power Team parts catalog PC97